

REVISION TO THE MOBILE ID DEVICE BPR

Kickoff Meeting
October 30, 2014

WELCOME

◎ Barbara Guttman

- Director, Information Access Division

WELCOME!!!

◉ Looking back... some factoids:

- It was a long road to the BPR...
 - APB request announced on 08/06/2007
 - The BPR published on 08/21/2009 (746 days)
- The final comment disposition spreadsheet was 49 pages long (the BPR itself was 55 pages long).
- In 2009, there was only a handful of devices that were ready for market.

MUCH HAS CHANGED

- But... its been over 5 years since publication, and much has changed.
 - A mid-range desktop in 2008 could execute 10 BIPS... A smartphone last year hit 18 BIPS.
 - Sensors technology has improved (1000ppi fingerprints, megapixel resolution for even the most basic cameras devices)
 - Data transmission systems have radically transformed (LTE, 802.11, 802.16, Bluetooth)

A LONG ROAD TRAVELLED

- We've come a long way... Lots of devices... FBI-NGI-RISC is in full swing... Lots of new interest...

Interest over time (Google web search interest for "Mobile ID")



IN CLOSING

- The time is right for an update.
- Good to see continued interest and support from everyone!
- Glad to have you here for the next evolution in Mobile ID!

Shahram Orandi
sorandi@nist.gov

NEED FOR AN UPDATE

- ◉ BPR originally published in 2009
- ◉ ANSI/NIST-ITL standard has incorporated the Acquisition Profiles, and they should be maintained in only one document
- ◉ New modalities have matured for biometric and forensic use in a mobile environment
- ◉ Referenced Standards have been updated and new ones developed
- ◉ Use cases have been further defined
- ◉ A mobile ID taxonomy has been developed
- ◉ New technology has been developed

EXCERPTS FROM IBIA LETTER TO NIST DATED MARCH 7, 2014

- Based on input from our member organizations, IBIA is respectfully requesting that the National Institute of Standards and Technology (NIST) consider convening a working group to discuss and review potential updates to NIST Special Publication 500-280 *Mobile ID Device Best Practice Recommendation Version 1.0* (hereafter, Mobile ID BPR), which was published in July 2009. This publication is an important reference document for implementers and suppliers of mobile devices that incorporate biometric technology and is often cited in procurement documents and is used by suppliers in developing product specifications. A number of later documents and standards, such as ANSI/NIST-ITL 1-2011 (NIST Special Publication 500-290), reference the Mobile ID BPR document extensively. However, we believe that some references in the Mobile ID BPR document may be outdated and should be refreshed.

PROCESS OVERVIEW

- ⦿ The BPR is a NIST Special Publication, not part of the ANSI/NIST-ITL standard
- ⦿ We will set up working groups to develop text for the new document
- ⦿ Much of the document structure will be changed, since the Acquisition Profiles are now in the ANSI/NIST-ITL standard
- ⦿ Drafts will be circulated for comment
- ⦿ There will be a poll of interested parties to determine if the draft is acceptable prior to putting through the NIST publication procedure.

FORMAT OF THE MEETING

- Presentations in limited time slots
 - Questions if there is enough time left in the slot
- Group Discussion in the afternoon
- Think about these questions during the day:
 - What do we want to consider as 'mobile' in the BPR (wearable -- transportable - luggable --mixed ?)
 - What modalities do we want to address?
 - Should we include SOPs? Privacy issues? Etc. or just 'technical' aspects ?
 - Which areas are you willing to chair?
 - Is there anything else that occurs to you as important?

presentations

USE CASE SCENARIOS

USE OF THE NEXT MOBILE BPR

A DHS S&T Perspective

Patricia Wolfhope
PM
DHD S&T
Resilient Systems Division



Homeland
Security

Science and Technology

MOBILE BPR USES?

- Referencing the Mobile BPR in RFI's, RFPs, BAAs . . .
 - Law Enforcement/Military Profiles make it easy
- We have an opportunity to tune the next version to suite our needs
 - Documentation tool for needs and requirements
 - Use cases/scenarios already spelled out
 - Mobile device characteristics in tabular form
 - Guidance on Standards and Best Practices

EXAMPLES OF SOME NEEDED ADDITIONS

⦿ Forensics

- Latent finger printing on site at crime scenes
- Finger printing deceased persons



⦿ Access control

- To the mobile device itself, facility/area, obtaining services . . .
- One sentence in section 11.3.1 on Operator Authentication



⦿ BOLOs

- Ability to receive pictures and criminal history in the field on a mobile device



FORENSICS (LATENT PRINTS)


During a traffic stop, an unknown suspect pulled out a firearm and aimed it towards Officer Pierce.

Officer Pierce fired his duty weapon toward the suspect.

The suspect fled on foot with a weapon.


Weapon was located in a nearby back yard.

Field Technician was called out to collect and run latent prints with Fusion at the site. Seventeen prints found to be medium to high quality were submitted and resulted in AFIS hits. An arrest was made.

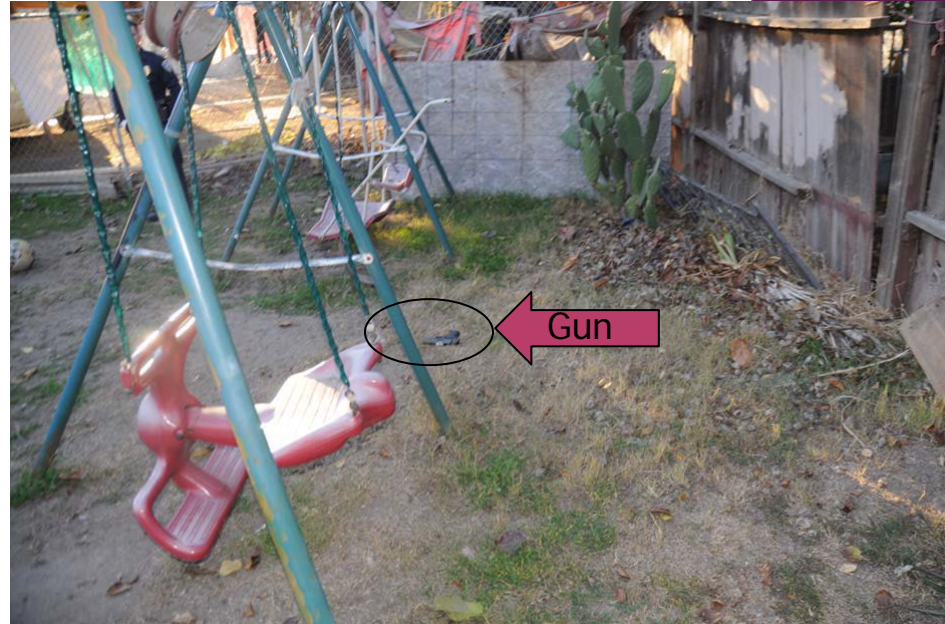

FORENSICS (LATENT PRINTS)

Fusion Image

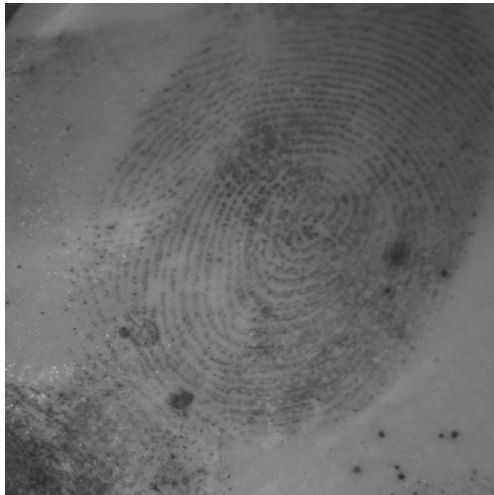

Suspect



IDVerify San Joaquin County CAFIS

Transaction Transaction

Fusion Candidates

Trans No: FUSL000187

Fusion Candidates for FUSL000187

Transaction	Score	Transaction	Score	Transaction	Score
1/10 Score: 1196-6	2/10 Score: 990-4	3/10 Score: 901-6	4/10 Score: 893-7	5/10 Score: 849-3	6/10 Score: 848-4
7/10 Score: 833-10	8/10 Score: 821-8	9/10 Score: 815-1	10/10 Score: 810-8		



Hit Right Thumb

FORENSICS (LATENT PRINTS)

SPD CASE [REDACTED] 417 PC

LATENT LIFT #7B - FROM INTERIOR REARVIEW MIRROR

WITH BLACK POWDER

Lights Out
Lifted

Workstation

IDENTIFIED: [REDACTED]

Lights Out
Not Lifted

FUSION #187

LAB AUTO

LAB MANUAL

1290

1493

1020

1083

1236

911

860

919

883

849

907

841

842

902

840

839

875

840

826

865

804

826

857

801

822

854

794

846

786

P
A
T
T
Y

W
O
L
F
H
O
P
E

ACQUISITION PLANNING TOOL BY PROFILE

- Acquisition planning tool for operational end users (currently Appendix B)

Description	Law Enforcement	Military
Biometric Data Collection (image sensor capabilities)	flat fingerprints (FAP 10) facial image (SAP 32)	FAP 45 or above SAP 42 or above
Durability / Ruggedness		Ingress Protection Rating: IP65 Must survive multiple drops at 36 inches
Mobility	Field Use and Office Use	Vehicle Use (mounting and charging)
Communications	3G cellular 802.11 (WiFi) Ethernet LAN (RJ-45 connection, for office use)	4G LTE cellular USB 2.0
Inputs	Touchscreen Virtual Keyboard	Physical keyboard peripheral (for office use)
OS	Windows 7	Windows 8
Data Formatting Output(s)		DHS OBIM IXM 6.0 DOJ FBI EBTS 9.3 DOD DFBA EBTS 3.0
Subject Record (data) Storage	200 subject records (storing images, not templates)	
Security	Adherence to DHS 4300A and FBI CJIS Mobile Security policies Data "at rest", "in use" is protected and secured	
Screen Size (inches, diagonal) (includes platform + accessory)	Greater than 6 in	Less than 12 in
Dimensions (inches) (includes platform + accessory)	Less than 12x10x1.25	Less than 12x10x0.75
Weight (pounds) (includes platform + accessory)	Less than 3 lbs	Less than 2 lbs
OPTIONAL Reqs		
Card Reader		FIPS-201-1 (e.g. PIV, PIV-I, CAC)
Biometric Data Collection		IAP 20 or above [OPTIONAL]

ACQUISITION PLANNING TOOL BY USE CASE

Characteristic	Road Stop	Latent Printing	Deceased	Check in/out
Biometric Data Collection (image sensor capabilities)				
Durability / Ruggedness	!	!	!	!
Mobility				
Lighting				
Communications				
Inputs				
OS				
Subject Record (data) Storage				
Docking				
Battery				
Security				
Screen Size (inches, diagonal) <i>(includes platform + accessory)</i>				
Dimensions (inches) <i>(includes platform + accessory)</i>				
Weight (pounds) <i>(includes platform + accessory)</i>				
PIV/CAC Card Reader				
<i>Biometric Data Collection (Iris and/or latent fingerprint image sensor capabilities)</i>				

USE CASES AND SCENARIOS

Rick Lazarick
Chief **Czar** Scientist - Biometrics
DHD S&T Support Contractor
Computer Sciences Corporation



Homeland
Security

Science and Technology


MOBILE BEST PRACTICES WORKSHOP

“Use Cases” and “Scenarios”


- Based on 2 sources:
 - NIST Mobile ID BPRS (2009)
 - DHS S&T MBHD (Mobile Biometric Handheld Device) (2011)
- Note reversal of terms

MOBILE ID BPRS "SCENARIOS"

Figure 1 - Tasks Across 4 Basic Scenarios

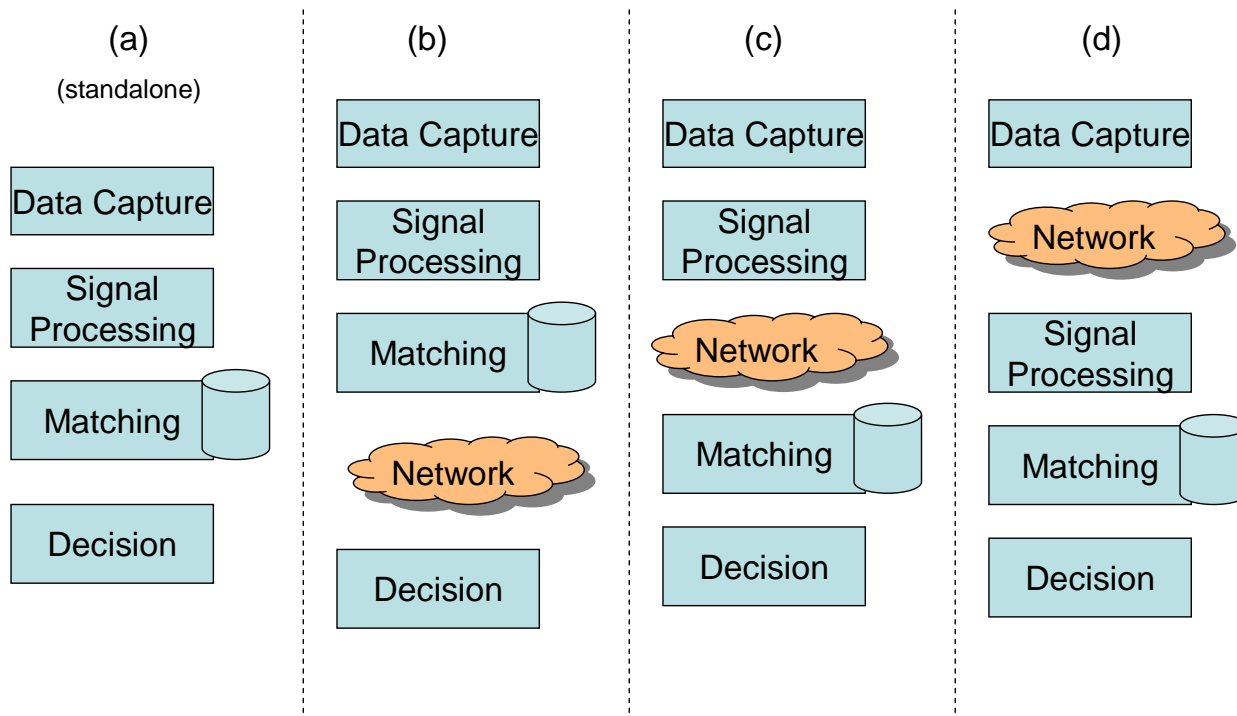

MBHD “USE CASES”

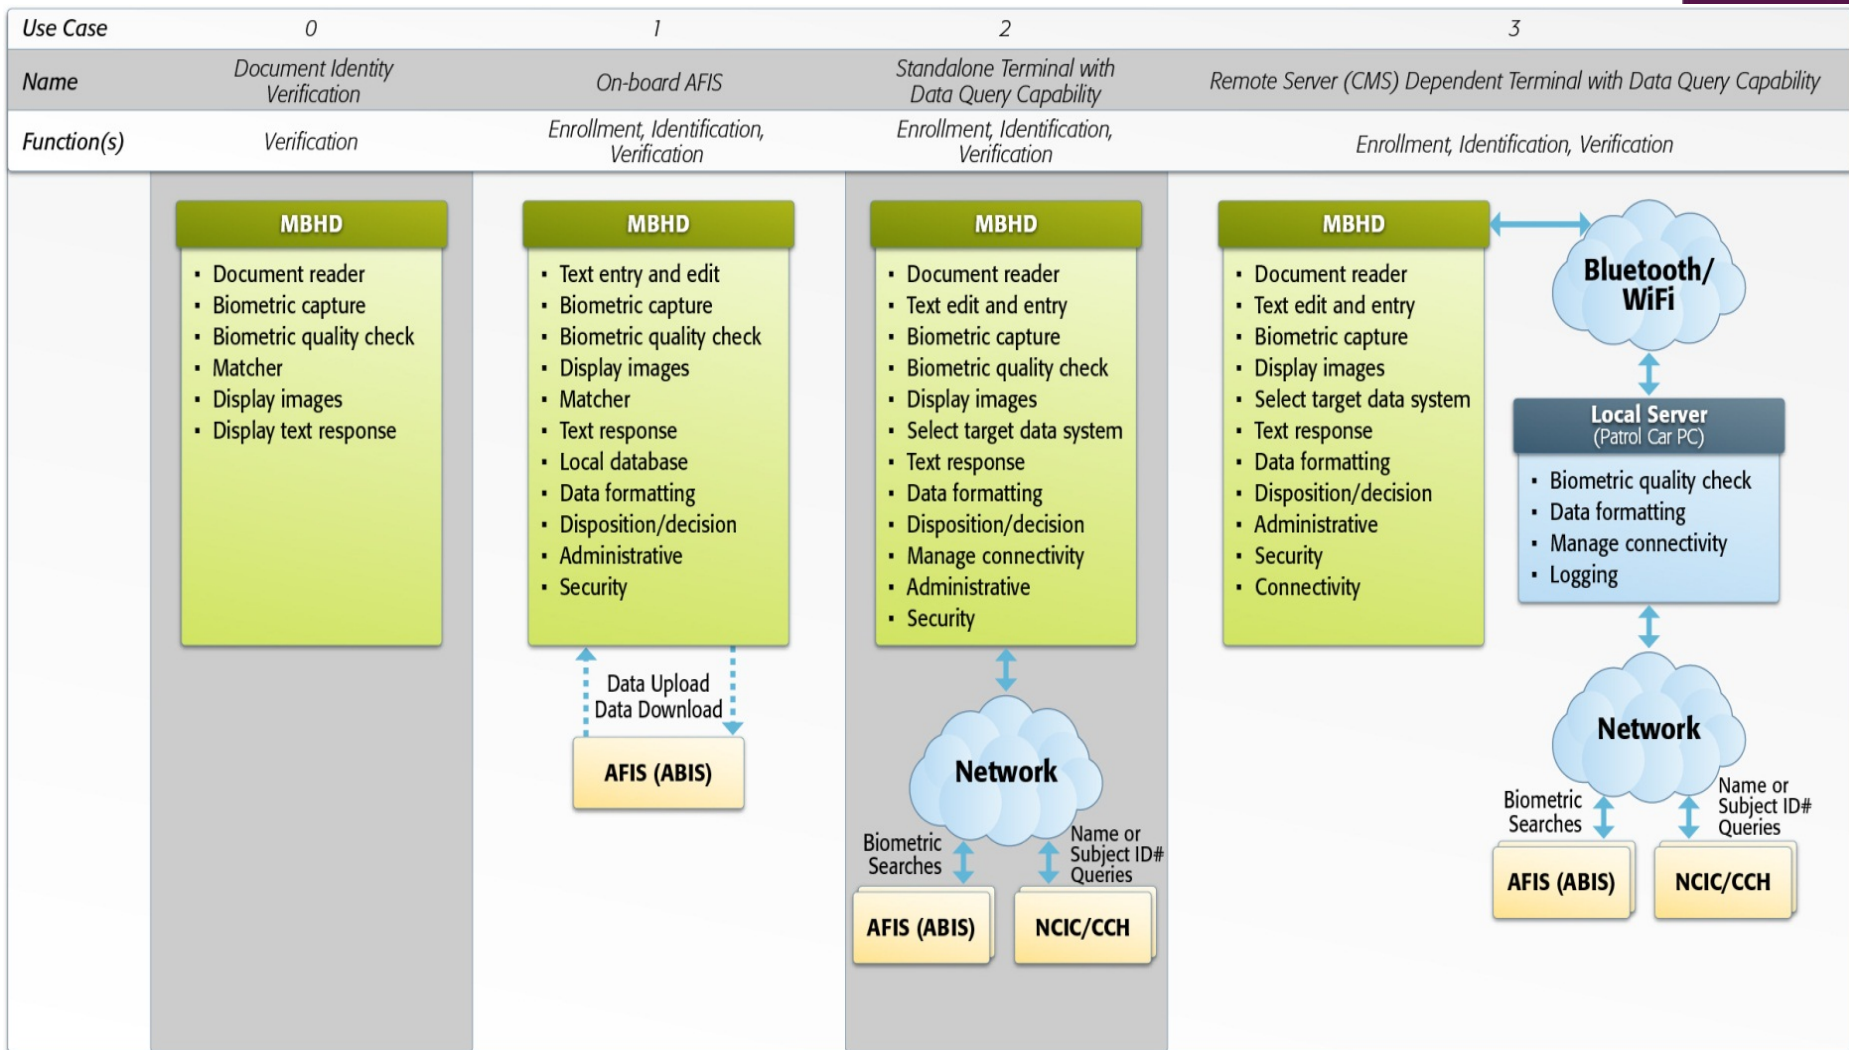

MOBILE ID BPRS “USE CASES”

Table 6 - Use cases for risks and functions

Risk to Public Safety/Function	Use Case Example	SAP Level			Notes
		Face	Finger	Iris	
Severe/ Enrollment	Field enrollment into databases with applications where there is a high risk of loss of life or assets. Some situations may require multi-modal biometric enrollment. Enrollment should achieve an equivalent level of quality as if conducted in a controlled environment using non-mobile devices.	42	45+	42	<p>Recommend Capture:</p> <ul style="list-style-type: none"> • Iris = L&R • Finger = 10 <p>Enrolling all ten fingerprints, multiple views faces including full-face with three to five profiles, both irises, and multiple instances (captures) of each biometric provides additional search capabilities.</p> <p>Note for face enrollments, attempts should be made to control, background expression and lighting where it is practical to do so.</p>
Severe/ Identification	One to many search against a database to identify a subject where there is a high risk of loss of life or assets. Some situations may require multi-modal biometric identification.	42	45+	42	<p>Recommend Capture:</p> <ul style="list-style-type: none"> • Iris = L&R eyes • Finger = 4+ <p>Note for face identifications, attempts should be made to control, background expression and lighting where it is practical to do so.</p>
Severe/ Verification	1:1 match against a credential or database to verify identity where there is a high risk of loss of life or assets. Some situations may require multi-modal biometric verification.	32+	20+	42	<p>Recommend Capture:</p> <ul style="list-style-type: none"> • Iris = Either eye • Finger = 2+ <p>Note for face verifications, attempts should be made to control, background expression and lighting where it is practical to do so.</p>

MOBILE ID BPRS “USE CASES” (2)

Moderate/ Enrollment	Mobile booking: Field <u>cite</u> and release when the violation is not high enough to ensure incarceration until arraignment without bail.	42	40+	32	<p>Recommend Capture:</p> <ul style="list-style-type: none"> • Iris = L&R eyes • Finger = 6+ <p>Note for face enrollments and identifications, ideal lighting conditions should be used. Otherwise, fingerprints or irises should additionally be used.</p>
Moderate/ <u>Identification</u>	In field mobile identification of a subject with questionable or no identification.	42	30+	32	<p>Recommend Capture:</p> <ul style="list-style-type: none"> • Iris = Either eye • Finger = 4+
Moderate/ Verification	Personal Identity Verification (PIV) Release from custody.	32+	20+	32	<p>Recommend Capture:</p> <ul style="list-style-type: none"> • Iris = Either eye • Finger = 2+
Mild/Enrollment	The intention is for the biometric enrolment to be of sufficient quality that it shall allow later verification (e.g. e-citations).	32	30+	22	<p>Recommend Capture:</p> <ul style="list-style-type: none"> • Iris = L&R eye • Finger = 4+
Mild/ <u>Identification</u>	Rapid identification in custody prior to formal booking. (Typically done at the jail intake.)	32	10+	22	<p>Recommend Capture:</p> <ul style="list-style-type: none"> • Iris = Either eye • Finger = 2+
Mild/ <u>Verification</u> (<u>finger images</u>).	Court Appearance/Parole/Workhouse, Personal Identity Verification (PIV).	22+	10+	22	<p>Recommend Capture:</p> <ul style="list-style-type: none"> • Iris = Either eye • Finger = 1+
Mild/ <u>Verification</u> (<u>finger minutiae</u>).	Personal Identity Verification (PIV) (using minutiae).	N/A	5+	N/A	<p>Recommend Capture:</p> <ul style="list-style-type: none"> • Finger = 2+ <p>Not recommended for use between AFIS.</p>

MBHD “SCENARIOS”

Scenarios	Use Case 0	Use Case 1	Use Case 2	Use Case 3
Local Law Enforcement				
Law Enforcement Patrol Activities - Variation A (fingerprint)				X
Law Enforcement Patrol Activities - Variation B (face/iris)			O	X
Law Enforcement Public Event Disturbance			X	
Border Protection				
POE Identity Verification (Document Check)			X	
POE Identity Verification (US-VISIT) (Identity Check)	X			
POE Identification and Verification (US-VISIT)			X	
Maritime				
Coast Guard Interdiction			X	
Maritime Interdiction Operation (DSB Task Force, 2007)			X	
First Responders & Emergency Management				
Disaster Site Operations		X		
DHS First Responders Access Control		X		
Access Control				
Mobile Applications of TWIC	X	O		
Immigration				
Citizenship Application Processing			X	
Scenario Based on United States Border Patrol				
Hospital Scenario			X	
Identification of Deceased			X	
Checkpoint Operations			X	
Joint Operation			X	
Scenario TRADOC				
Hold, detain, release decisions regarding suspects		X		
Identification of local nationals for base access		X		
Scenario Stockton Police Department				
Field Capture Latent Pilot				X
Patrol Mobile Identifications				X
County jail house booking, transfer, and release		O		X

WAY FORWARD

- ⦿ Define our terms and stick with them
- ⦿ Early agreement on configurations
- ⦿ Start with collection of detailed descriptions



Homeland Security

Science and Technology

MOBILE VOICE APPLICATIONS

- Presentation not authorized for distribution

FBI CODIS AND RAPID DNA

- ⦿ RapidDNA capabilities have been developed and machines deployed around the world
- ⦿ Some have the capability to export data using ANSI/NIST-ITL 1-2011 format
- ⦿ FBI/CODIS is not now accepting ANSI/NIST_ITL format
- ⦿ DHS is testing RapidDNA units in a field environment but not linking to CODIS

CODIS DNA Data Exchange Standards

Kevin M. Ellis

Requirements Manager, CODIS Unit

FBI Laboratory

October 31, 2014

United States Department of Justice
Federal Bureau of Investigation



CODIS

COMBINED DNA INDEX SYSTEM

COMBINED **DNA**
INDEX SYSTEM

Current DNA Data Exchange Formats

1



- CODIS currently uses an XML file format for adding and modifying specimens in the CODIS database.
- Common Message Format (CMF 3.2) is used to add specimens with STR and Y-STR loci.
- CMF 3.2 was released in July 2003.
- This format is used by commercial vendors that do not use CODIS, but need to provide DNA profiles to CODIS laboratories.



An example of an Import CMF 3.2 file results follows:

```
<?xml version="1.0" encoding="utf-8"?>
<CODISImportFile xmlns="urn:CODISImportFile-schema">
  <HEADERVERSION>3.2</HEADERVERSION>
  <MESSAGETYPE>Import</MESSAGETYPE>
  <DESTINATIONORI>TXDPS6900</DESTINATIONORI>
  <SOURCELAB>TXDPS6900</SOURCELAB>
  <SUBMITBYUSERID>Kevin.Ellis</SUBMITBYUSERID>
  <SUBMITDATETIME>2014-09-10T00:01:00</SUBMITDATETIME>
  <BATCHID>GFE12345</BATCHID>
  <KIT>GlobalFiler Express</KIT>
  <SPECIMEN SOURCEID="N/A">
    <SPECIMENID>ARRESTEE_01</SPECIMENID>
    <SPECIMENCATEGORY>Arrestee</SPECIMENCATEGORY>
    <LOCUS>
      <LOCUSNAME>CSF1PO</LOCUSNAME>
      <READINGBY>Kevin.Ellis</READINGBY>
      <READINGDATETIME>2014-08-22T19:56:00</READINGDATETIME>
      <ALLELE>
        <ALLELEVALUE>11</ALLELEVALUE>
      </ALLELE>
      <ALLELE>
        <ALLELEVALUE>12</ALLELEVALUE>
      </ALLELE>
    </LOCUS>
  </SPECIMEN SOURCEID="N/A">

```

Future DNA Data Exchange Formats

3



- A new Rapid CMF interface specification is being developed to support the possible integration of Rapid DNA instruments with CODIS.
- Discussion is occurring with Local, State and Federal law enforcement agencies to determine how law enforcement agencies (not on CJIS WAN) can communicate with CODIS.
- Future DNA message exchanges may use the ANSI/NIST-ITL Type-18 format.
- The FBI Laboratory Division is working with the CJIS Division to create messaging standards for Rapid DNA integration.


Goals of FBI Rapid DNA Initiative

4




- Rapid DNA is being designed for use in the law enforcement booking process to analyze DNA in near real-time
- Produce CODIS-compatible DNA profiles from arrestee reference samples in the booking station environment
- Use the existing CODIS structure to search a DNA database to determine if the arrestee is linked to an unsolved crime while the individual is still in police custody

Draft Rapid DNA Message Flow

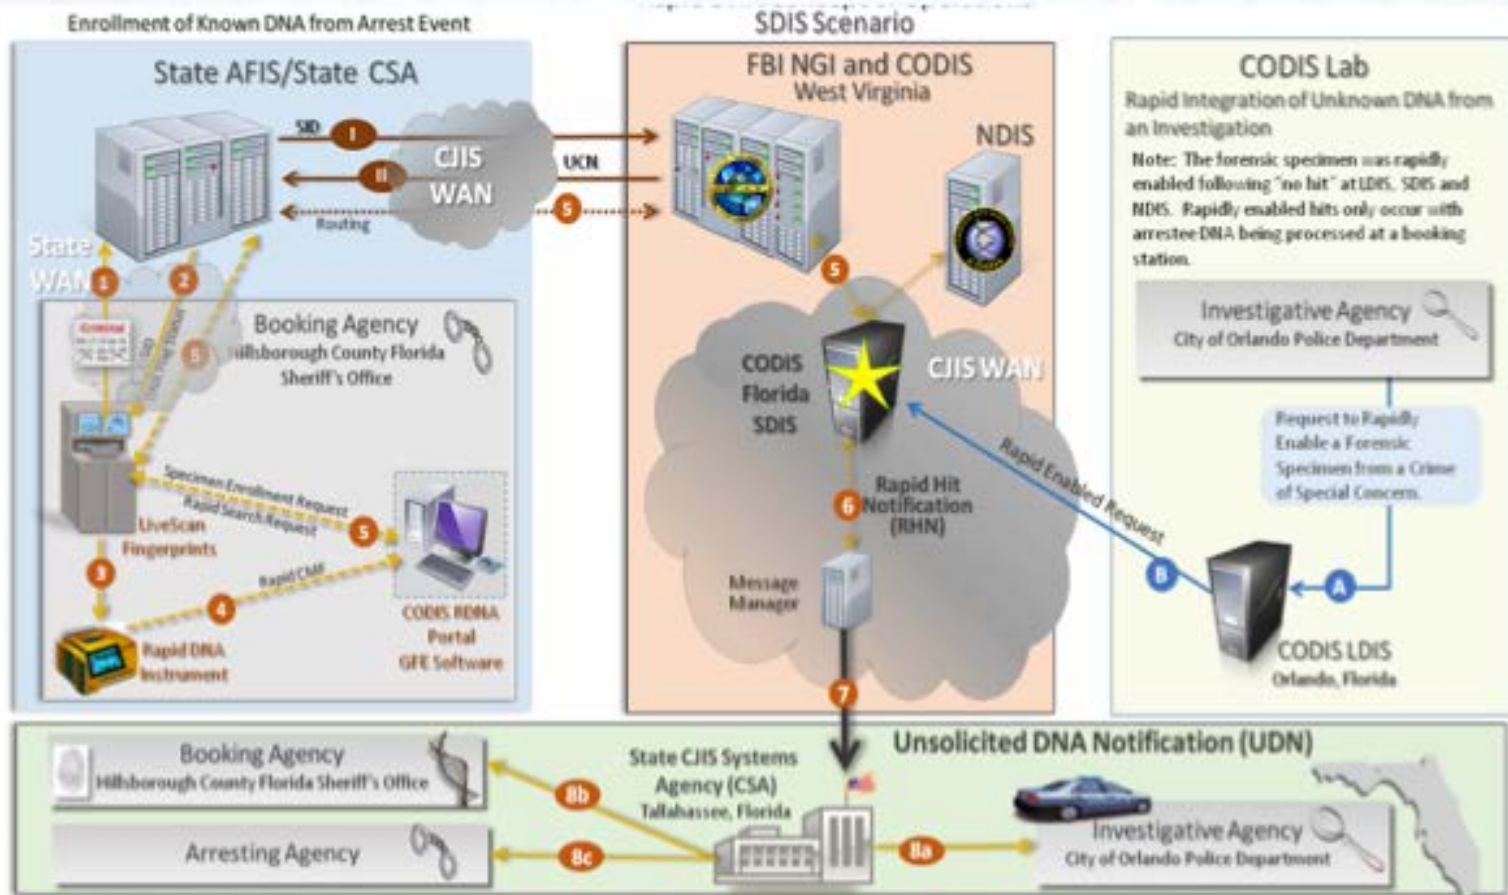

KEVIN ELLIS



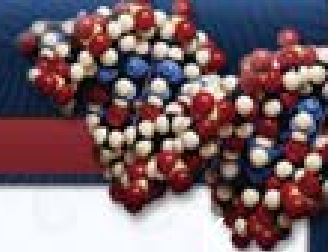

Thank You

Kevin M. Ellis
CODIS Unit
703-216-2852
Kevin.Ellis2@ic.fbi.gov

MOBILE DEVICE USABILITY FOR BIOMETRIC ACQUISITION

K
R
I
S
T
E
N

G
R
E
E
N
E

Kristen K. Greene

NIST Visualization and Usability Group

NIST DISCLAIMER

- Disclaimer: Any mention of commercial products or reference to commercial organizations is for information only; it does not imply recommendation or endorsement by the National Institute of Standards and Technology nor does it imply that the products mentioned are necessarily the best available for the purpose.

OUTLINE

- ◉ Usability
- ◉ Mobile device constraints
- ◉ WSABI (Web Services for Acquiring Biometric Information)
- ◉ Designing for touch and gesture

USABILITY MATTERS

- It matters A LOT
- Better usability = faster task completion times, fewer errors
- Better usability = less training

USABILITY: ISO 9241

- Usability is defined (ISO 9241, 1998) as "the extent to which a product can be used by specified users to achieve specified goals with effectiveness, efficiency and satisfaction in a specified context of use."

USABILITY: ISO 9241

- **Effectiveness:** Accuracy and completeness with which users achieve specified goals.
- **Efficiency:** Resources expended in relation to the accuracy and completeness with which users achieve goals.
- **Satisfaction:** Freedom from discomfort, and positive attitudes towards the use of the product.
- **Context of use:** Users, tasks, equipment (hardware, software and materials), and the physical and social environments in which a product is used.

DEVICE SIZE MATTERS

- Smaller devices = BIGGER usability problems
- Smaller buttons and keys
 - Onscreen keyboards
- Lack of tactile feedback
- Icon sizing and spacing
- Can't port directly from desktop to mobile

ONSCREEN KEYBOARDS


- Sizes vary *between* mobile devices
 - Based on physical differences in maximum available touchscreen real estate
- Sizes vary *within* a single device
 - Depending on device orientation (landscape versus portrait mode)
 - “splitting” the keyboard, which changes the relative distance between some keys more so than others

WSABI

- ◉ Web Services for Acquiring Biometric Information
- ◉ Touchscreen interface for multimodal biometric capture
- ◉ Has undergone formal usability testing
- ◉ <https://github.com/NIST-BWS/wsabi2>
- ◉ <http://dx.doi.org/10.6028/NIST.IR.8003>
 - Design and Testing of a Mobile Touchscreen Interface for Multi-Modal Biometric Capture


WSABI

- ◉ Consistency is key
- ◉ Regardless of the biometric modality or sensor, users perform same actions to capture, annotate, clear, and retake biometric data
- ◉ Same method of sensor setup regardless of biometric modality or sensor

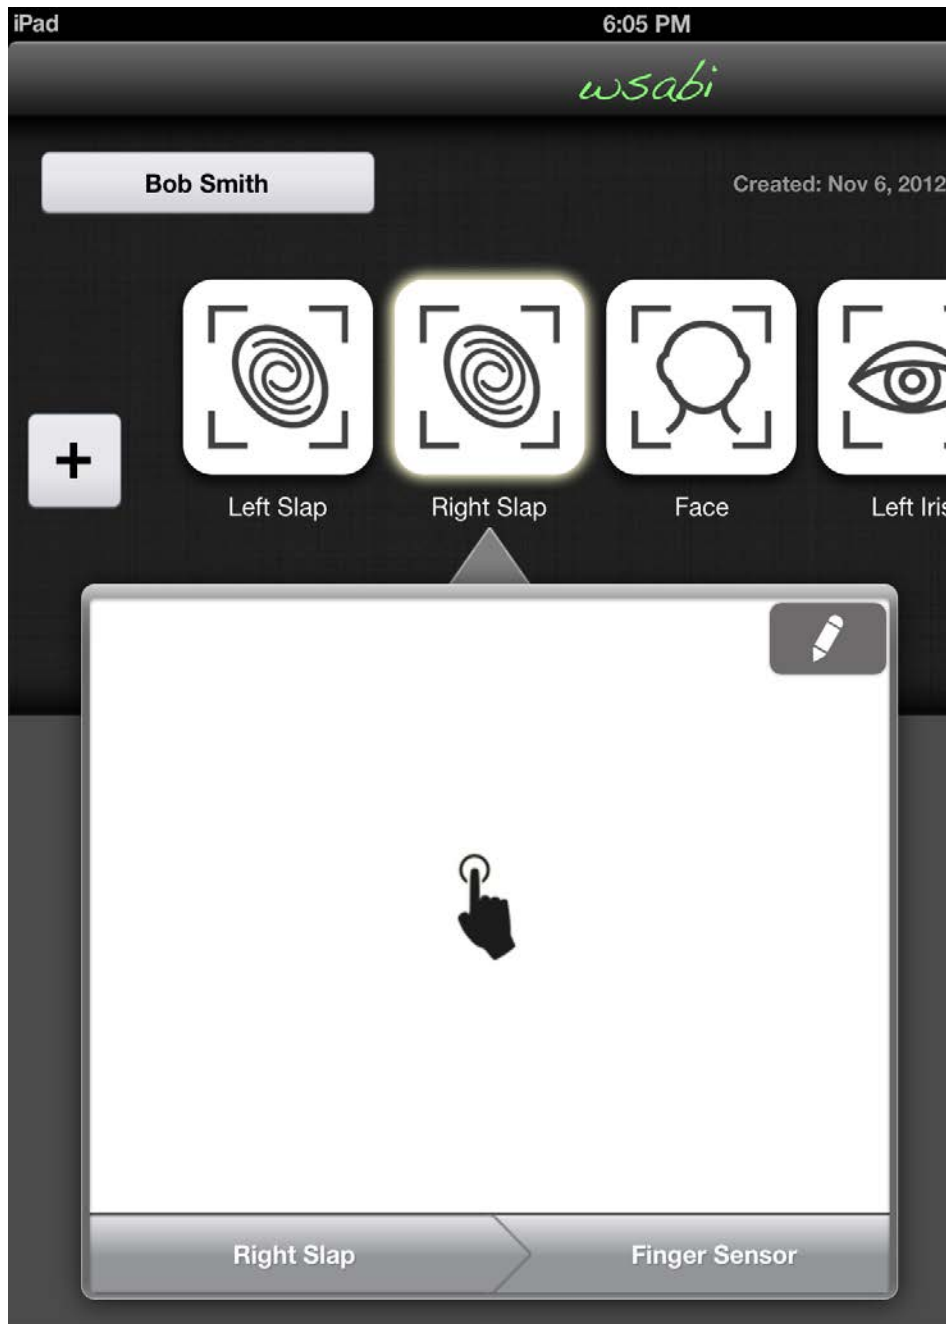


K
R
I
S
T
E
N

G
R
E
E
N
E

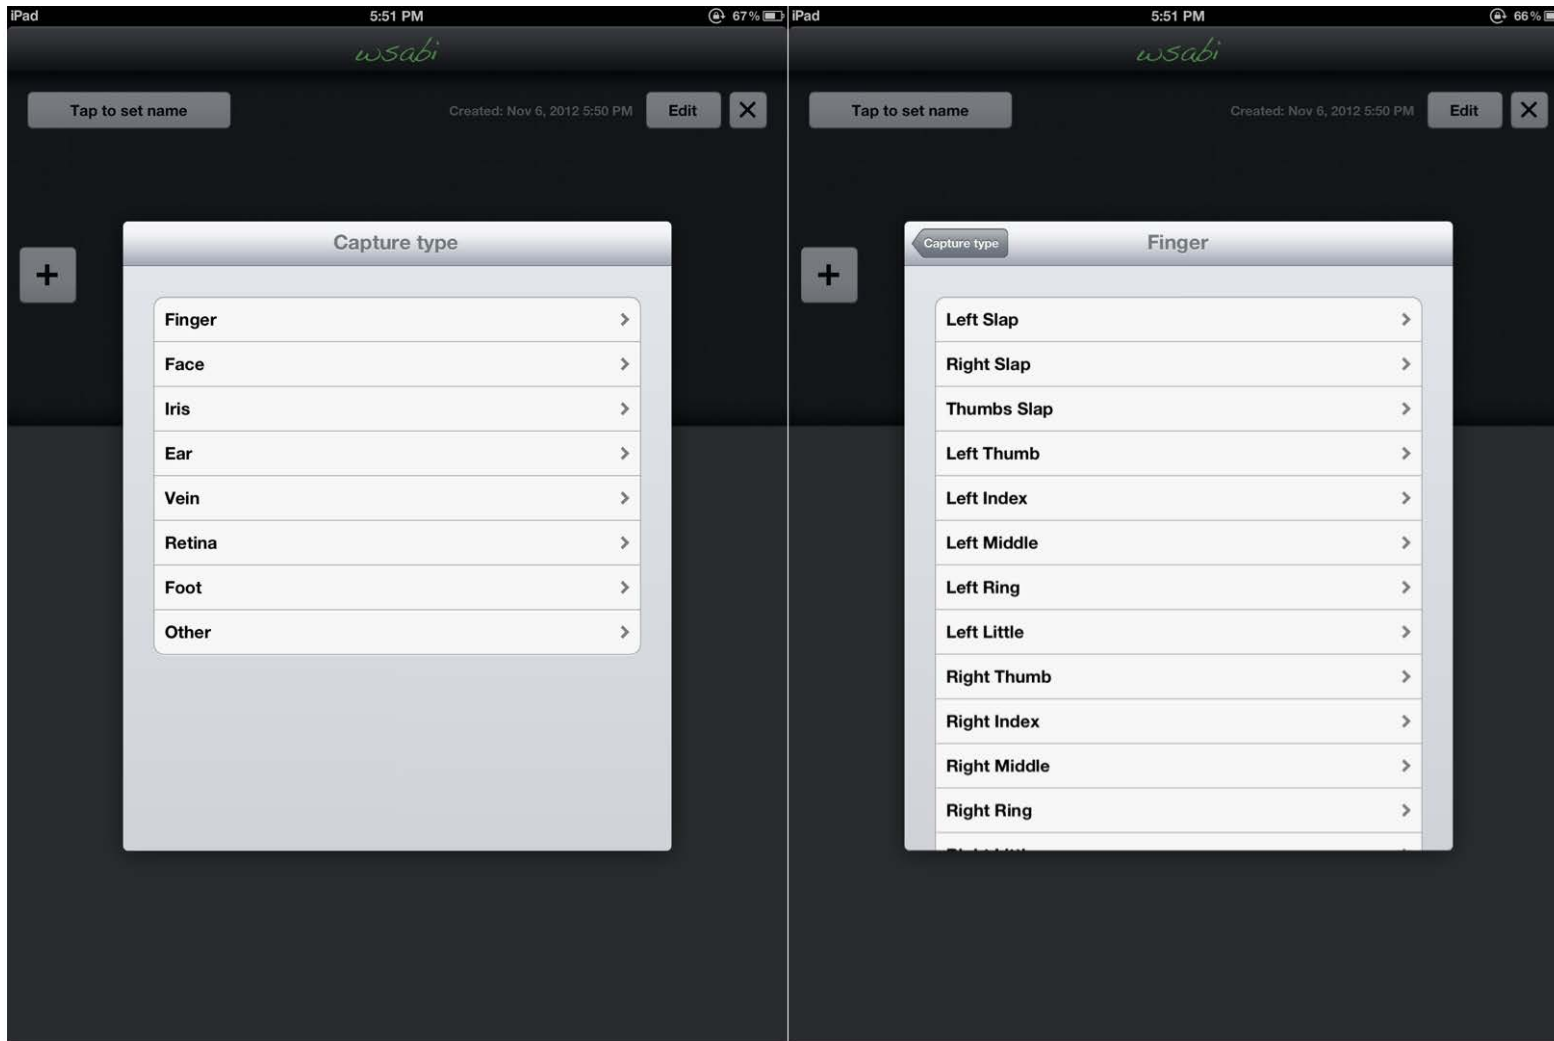



K
R
I
S
T
E
N




G
R
E
E
N
E

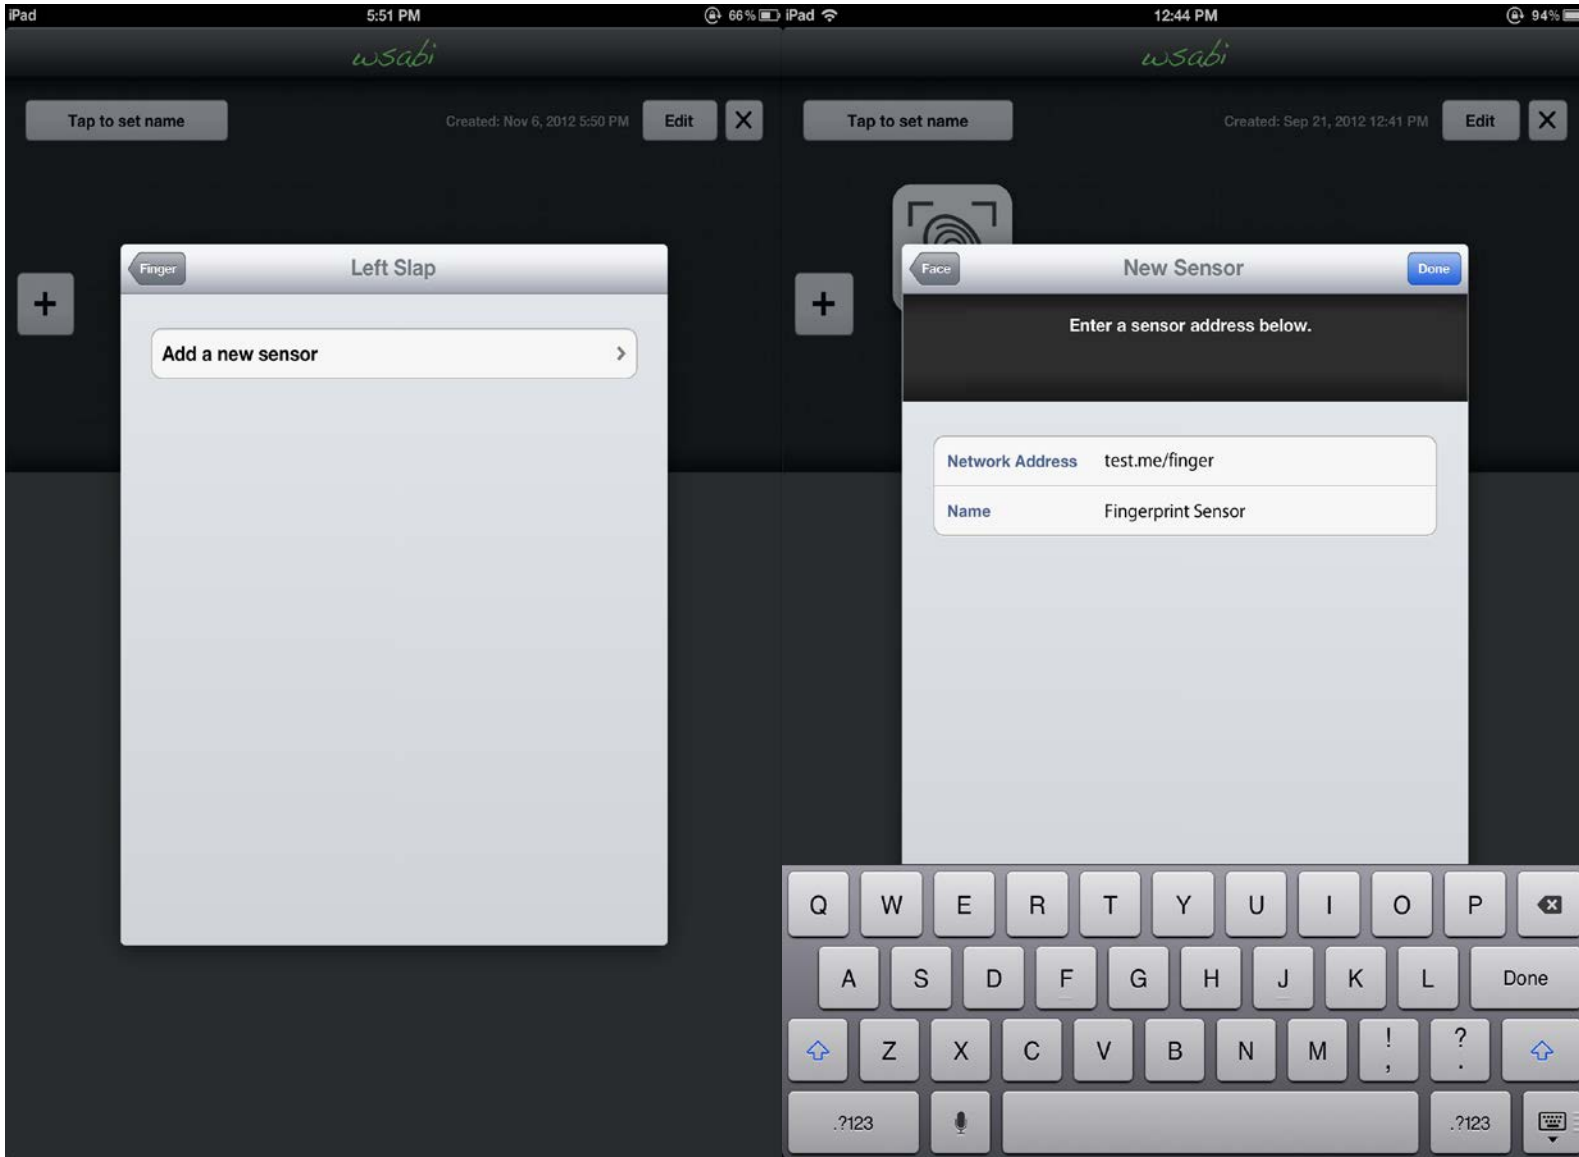

K
R
I
S
T
E
N

G
R
E
E
N
E

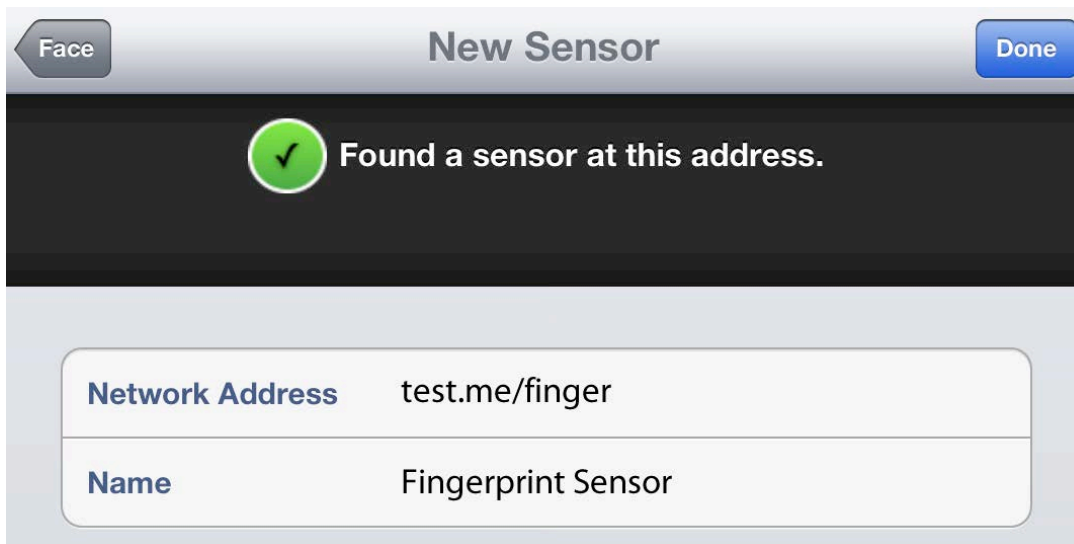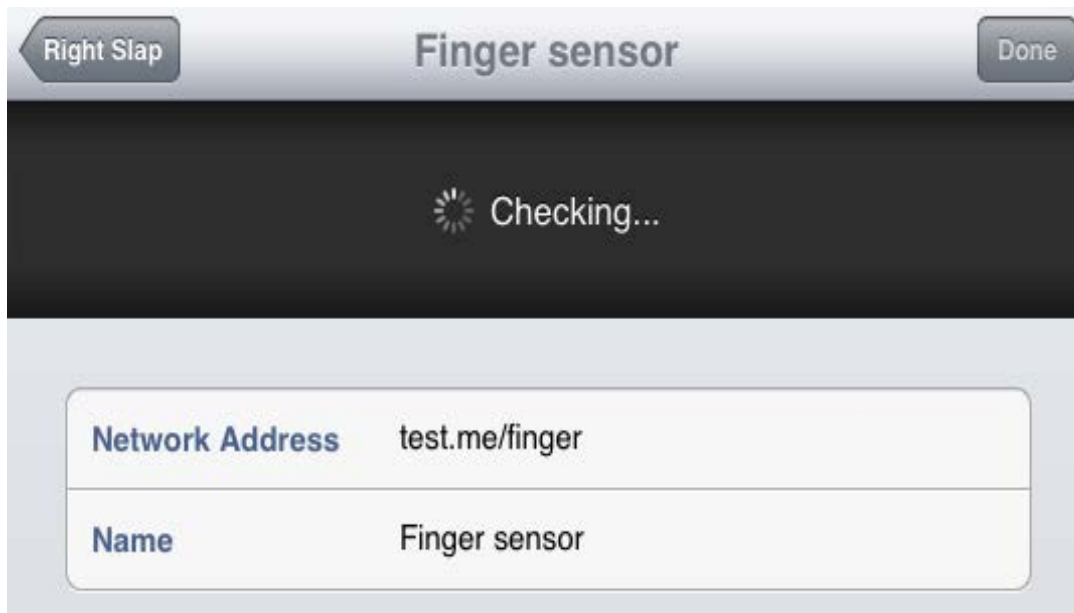

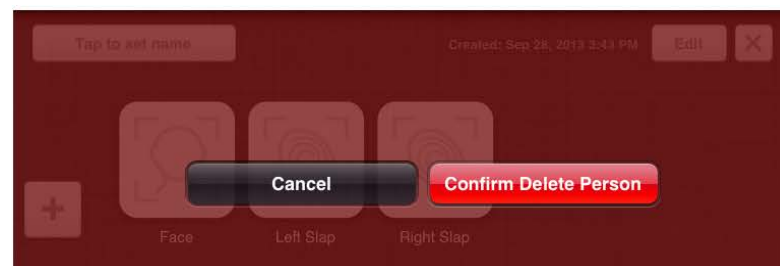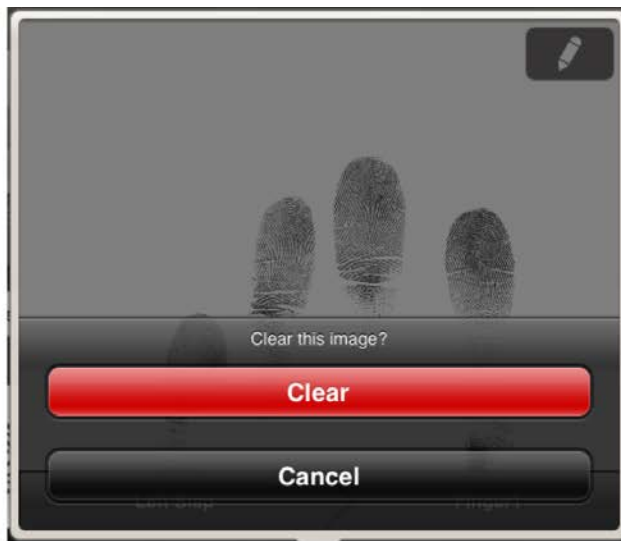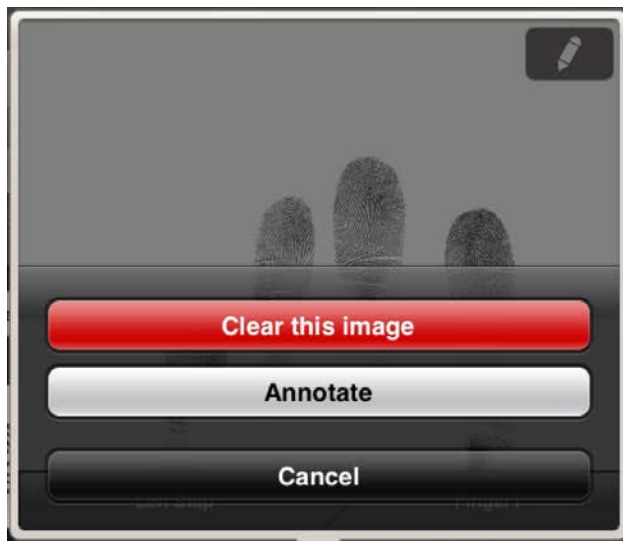

DESIGN GUIDELINES (A FEW)

- ◉ Design biometric acquisition software to be user- rather than sensor-centric
- ◉ Keep the core capture primitives constant
- ◉ Be consistent
- ◉ Use internationally tested, standardized symbols where possible
- ◉ Be aware of differences between desktop and mobile computing paradigms

QUESTIONS?

- ⦿ <http://dx.doi.org/10.6028/NIST.IR.8003>
 - Design and Testing of a Mobile Touchscreen Interface for Multi-Modal Biometric Capture
- ⦿ kgreene@nist.gov
- ⦿ bws.nist.gov

BORDER PATROL USE OF IRIS IN A MOBILE ENVIRONMENT

- Remote Subject Identification
 - 1:N based on iris only
 - 1:N multimodal
 - Tablet device (peripheral or built in camera)
- Detainee Management
 - 1:1 based on iris only
 - Tablet device, multiple use cases
 - Verify identity before transfer of custody
 - Verify deportation at point of departure
 - Track detainee movement using iris

FBI MOBILE ID SCENARIOS



CJIS Global Initiatives Unit



Peter Alex

10/27/14

P
E
T
E
R

A
L
E
X



GIU Biometric Tools Initiative

- **MISSION:** to give FBI users the tools to access the biometric identification power of the US Government in real time at any point on the planet in support of operations.
- **VISION:** to be the premier United States government provider of mobile identification solutions by delivering 1) the best tools, 2) and the most data, 3) with the fastest speed, 4) to the most locations, 5) for the greatest operational impact.




QCP - Components

- **Current**
 - Quick Capture Platform: backpack (laptop, scanner, battery, camera)



Panasonic Toughbook
Laptop



Air card
(Not in all kits)



BGAN Satellite
(Not in all kits)




Fingerprint Scanner



Basic messaging model

- End user
 - Create transaction through application
 - Open communication path
 - Open transaction manager
 - Transmit transaction to CJIS
-
- Response sent back to the transaction manager
 - Notification can be viewed on the device

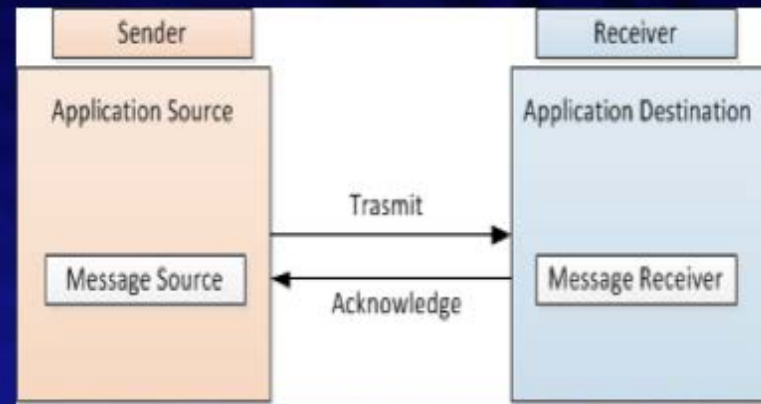



BCIP Software



Bio



Document



Face/SMT



Fingerprint



Iris



Palm




Info



Cancel



Mark the missing fingers

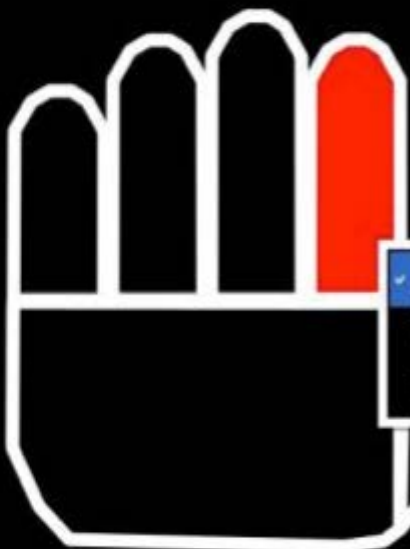

Amputated
Unable To Print
Healthy

Start



Missing

Capture

P
E
T
E
R

A
L
E
X

Transaction manager

Transaction Manager - TESTING

File Notifications View Help


Submissions Responses

Search

 Response Received No Name Provided	 Response Received NOVSKY,JOHN	 Response Received No Name Provided	 Submitted No Name Provided
 Response Received No Name Provided	 Response Received No Name Provided	 Response Received No Name Provided	 Response Received No Name Provided
 Response Received No Name Provided	 Response Received No Name Provided	 Response Received NOVSKY,JOHN B III	 Response Received No Name Provided

Overview
Transaction Type: Submission [TPRS]
Status: ResponseReceived
Last Action: 2/27/2014 8:40:54 AM
File Name: 20140227-083303-TESTTEST0.ebts

Transaction Information
TOT: TPRS
ORI: DCFBIGU07
Date: 20140227

Responses


P
E
T
E
R

A
L
E
X

Connection: 10.0.141.157

Windows taskbar with icons for Internet Explorer, File Explorer, and other applications. System tray shows the time as 8:56 AM on 2/27/2014.

Transaction manager (Possible Rap Sheet)


Transaction Manager - TRAINING

NONIDENT: E2013295999000000004




ORI: WVIAFIS0Z
TOT: SRE
Date: 20131022
Name: NOVA,TESTING
Transaction Type: Nonidentification [SRE]
Status: Processed
Last Action: 10/22/2013 10:21:34 AM
File Name: efts.sub

IDENT: sscn20090200000000000



ORI: USVISIT0Z
TOT: SRE
Date: 20090430
Name: TEST,TEST
Transaction Type: Identification [SRE]
Status: Processed
Last Action: 10/22/2013 10:21:35 AM
File Name: efts.sub

NONIDENT: 6831786



ORI: WVD0D0000
TOT: SRE
Date: 20100423
Name: NOVA,TESTING
Transaction Type: Nonidentification [SRE]
Status: Processed
Last Action: 10/22/2013 10:21:35 AM
File Name: efts.sub

Rapsheet

This record is being sent for identification purposes only. It does not convey the individual's immigration status and is not an immigration detainee.

Statement on Disclosure of Visa Records


According to the Immigration and Nationality Act, section 222(f): The records of the Department of State and of diplomatic and consular offices of the United States pertaining to the issuance or refusal of visas or permits to enter the United States shall be considered confidential and shall be used only for the formulation, amendment, administration, or enforcement of the immigration, nationality, and other laws of the United States.

10:21 AM
10/22/2013

P
E
T
E
R

A
L
E
X

Current Communication Path

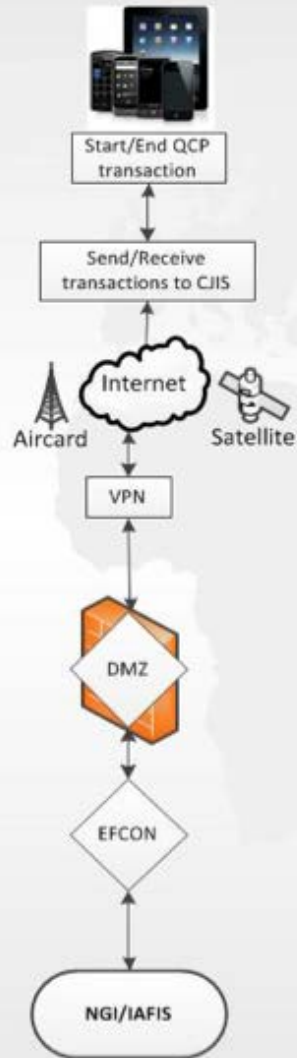



Mobile Device

- **Laptop (Current)**
- **Size (footprint)**
 - Large
- **Weight**
 - Weight: Heavy
 - ~5 lbs

- **Tablet (Interim)**
- **Size (footprint)**
 - Medium
- **Weight**
 - Weight:
 - Light
 - ~1 lbs

- **Phone (Future)**
- **Size (footprint)**
 - Small
- **Weight**
 - Weight:
 - Light
 - ~5 ounces





Mobile - Capabilities

Laptop

Primary Capabilities

- Fingerprint
- Face
- Iris

Future Capabilities

- Voice
- ...

Smartphone/Tablet

Primary Capabilities


- Fingerprint

Future Capabilities

- Face
- Iris
- Voice
- ...



Future Communication Path

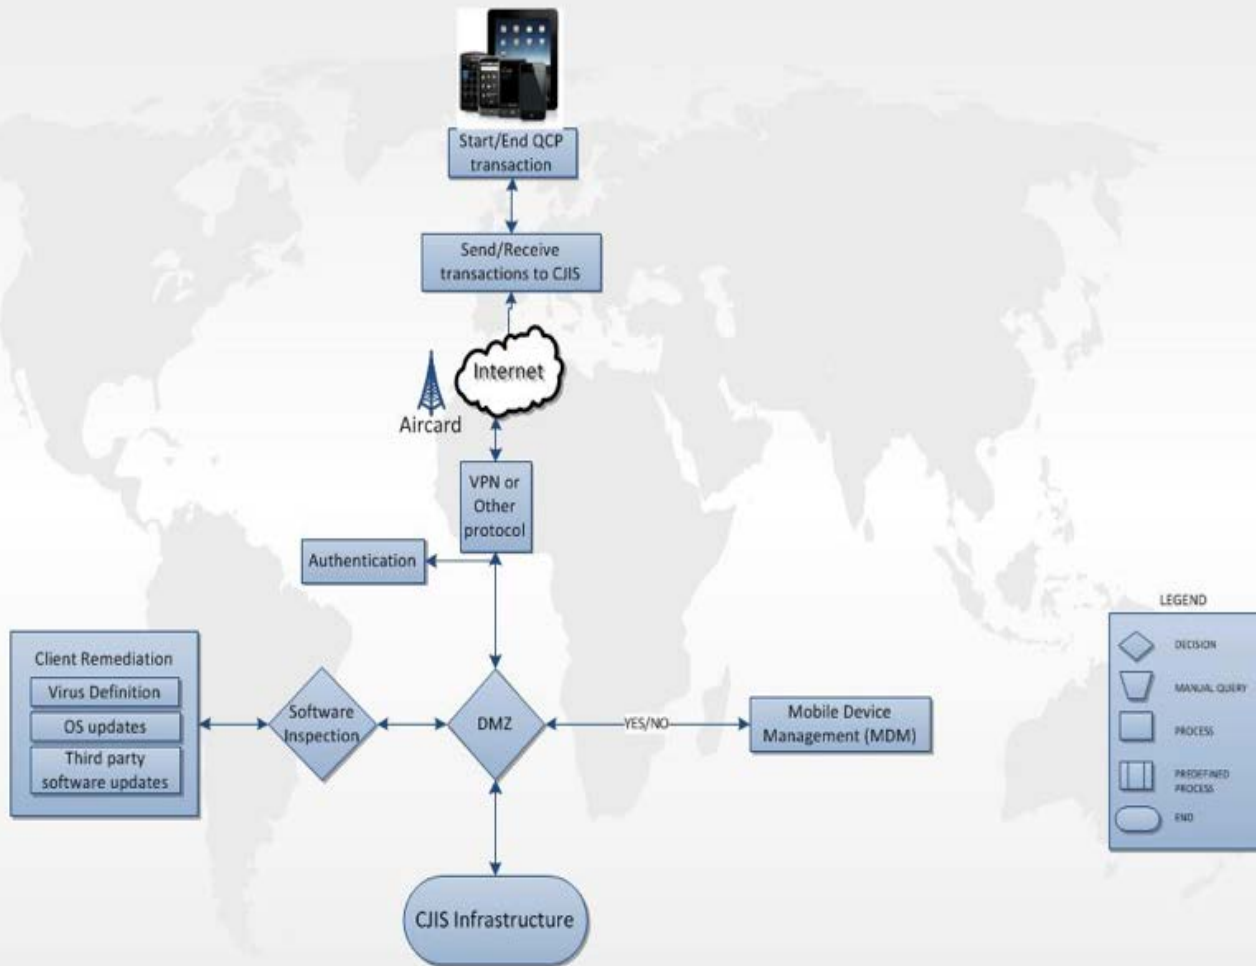



Transmission

- **Desktop/Laptop (Current)**

- **Software**
 - EBTS compliant (ebts files)
- **Communication**
 - Air/Satellite
 - VPN – Cisco AnyConnect

- **Mobile (Future)**

- **Software**
 - EBTS Compliant (ebts files)
- **Communication**
 - Cellular,???
 - VPN, Web Service,???



Scenarios

- Scenario 1

- A SWAT Agent is going into a house with a potential suspect. The area the house is located has optimal cellular communication for laptop to be set up or mobile device.

- Scenario 2

- A CAC Agent is conducting a prostitution sting operation in a hotel in a major city. Cellular communication for laptops and mobile phones will either be good or bad depending on the buildings and the city.





Scenarios

- Scenario 3

- An VC agent is going to be traveling to a remote dessert location in New Mexico where an unidentified person of interest has been located. Cellular communication is spotty, at best.



- Scenario 4

- A CTD agent is going to a foreign country for an operation. Cellular connectivity is very low to nonexistent.





Scenarios

- Scenario 5

- An team of NYC agents are conducting a mass arrest. Cellular communication is typically good depending on the building material and location.



- Scenario 6

- A natural disaster occurs, i.e. Hurricane Katrina. Cellular connectivity can be very low to nonexistent. Agents conduct fingerprinting on the bodily remains to help identify individuals.





Questions?



Peter Alex

Global Initiatives Unit

304-625-5019

Peter.Alex@ic.fbi.gov

P
E
T
E
R


A
L
E
X

BIOMETRIC USABILITY: STANDARDS

Mary Theofanos

Yee-Yin Choong

NIST
National Institute of
Standards and Technology
U.S. Department of Commerce

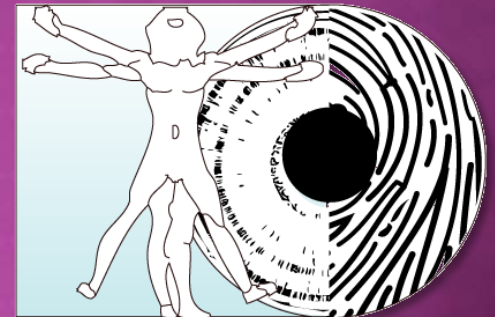

ISO/IEC SC 37 24779 INFORMATION TECHNOLOGY - PICTOGRAMS, ICONS AND SYMBOLS FOR USE WITH BIOMETRIC SYSTEMS HAS 4 ACTIVE PARTS

- Part 1: General
- Part 4: Fingerprint
- Part 5: Face
- Part 9: Vascular

24779: PART 1 INFORMATION TECHNOLOGY - PICTOGRAMS, ICONS AND SYMBOLS FOR USE WITH BIOMETRIC SYSTEMS – GENERAL

General guidance for use with all
biometric systems/modalities


- ◉ Move forward
- ◉ Move backward
- ◉ Move left
- ◉ Move right
- ◉ Failure
- ◉ Success
- ◉ Retry
- ◉ Seek Assistance



PART 4: FINGERPRINT APPLICATIONS - EXAMPLE SYMBOLS


General guidance

- General overlay guide for slap

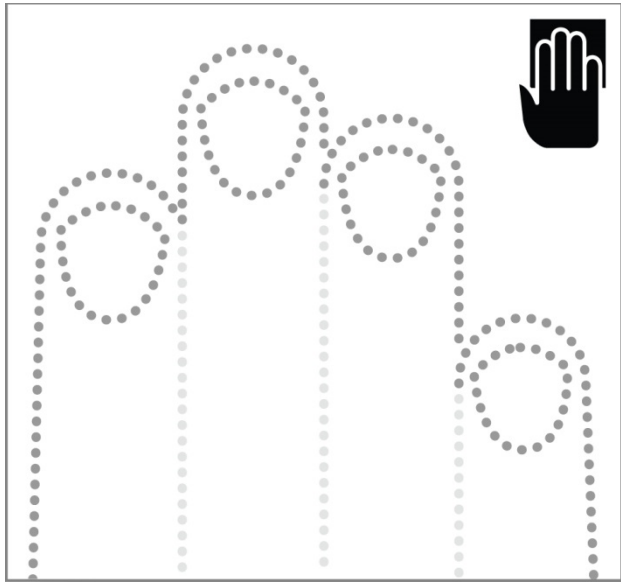

Hand positioning corrections:

- Move forward - thumb;

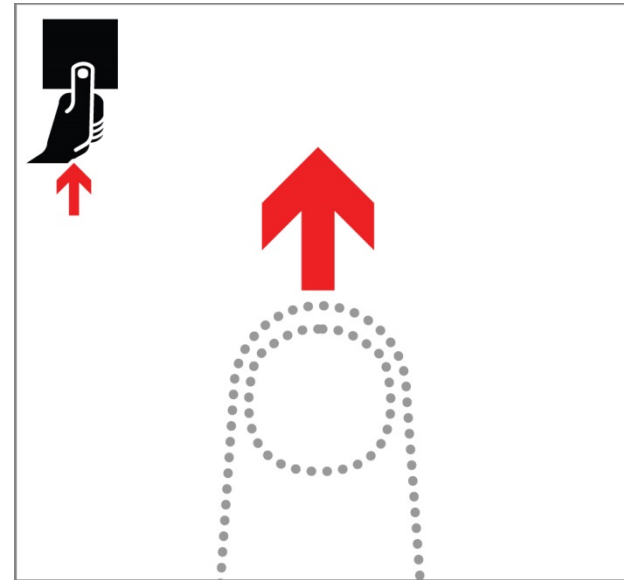

Also have animated symbols


Move your fingers up



24779: PART 5 INFORMATION TECHNOLOGY - PICTOGRAMS, ICONS AND SYMBOLS FOR USE WITH BIOMETRIC SYSTEMS — FACE

Symbols Include:


- Facial Image Capture
- Look at a point
- No Hats
- No glasses
- Move hair away from face

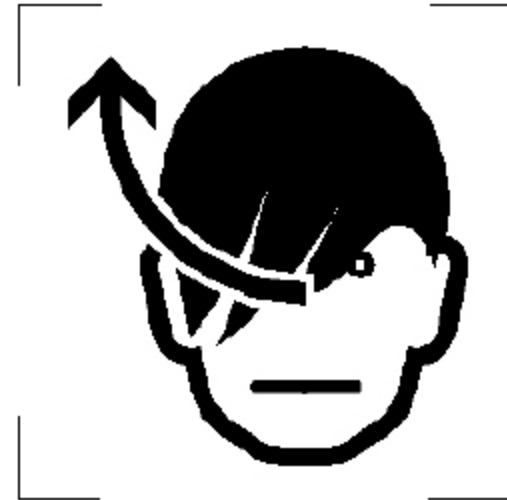


24779: PART 9 INFORMATION TECHNOLOGY - PICTOGRAMS, ICONS AND SYMBOLS FOR USE WITH BIOMETRIC SYSTEMS — VASCULAR

Symbols Include:


- Vascular Image Recognition
- Hand Vascular Image
- Finger Vascular Image

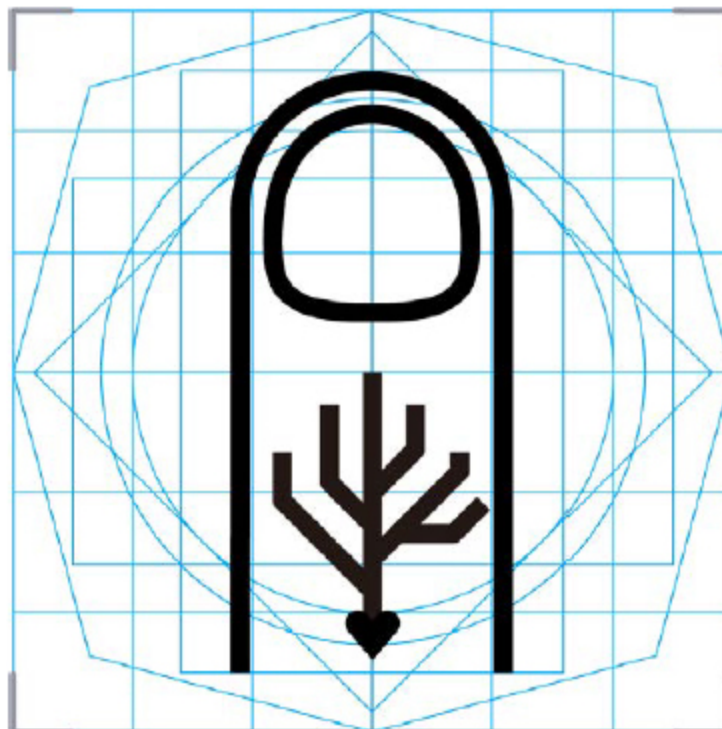

ISO 9241-210 Human Centered Design for Interactive Systems

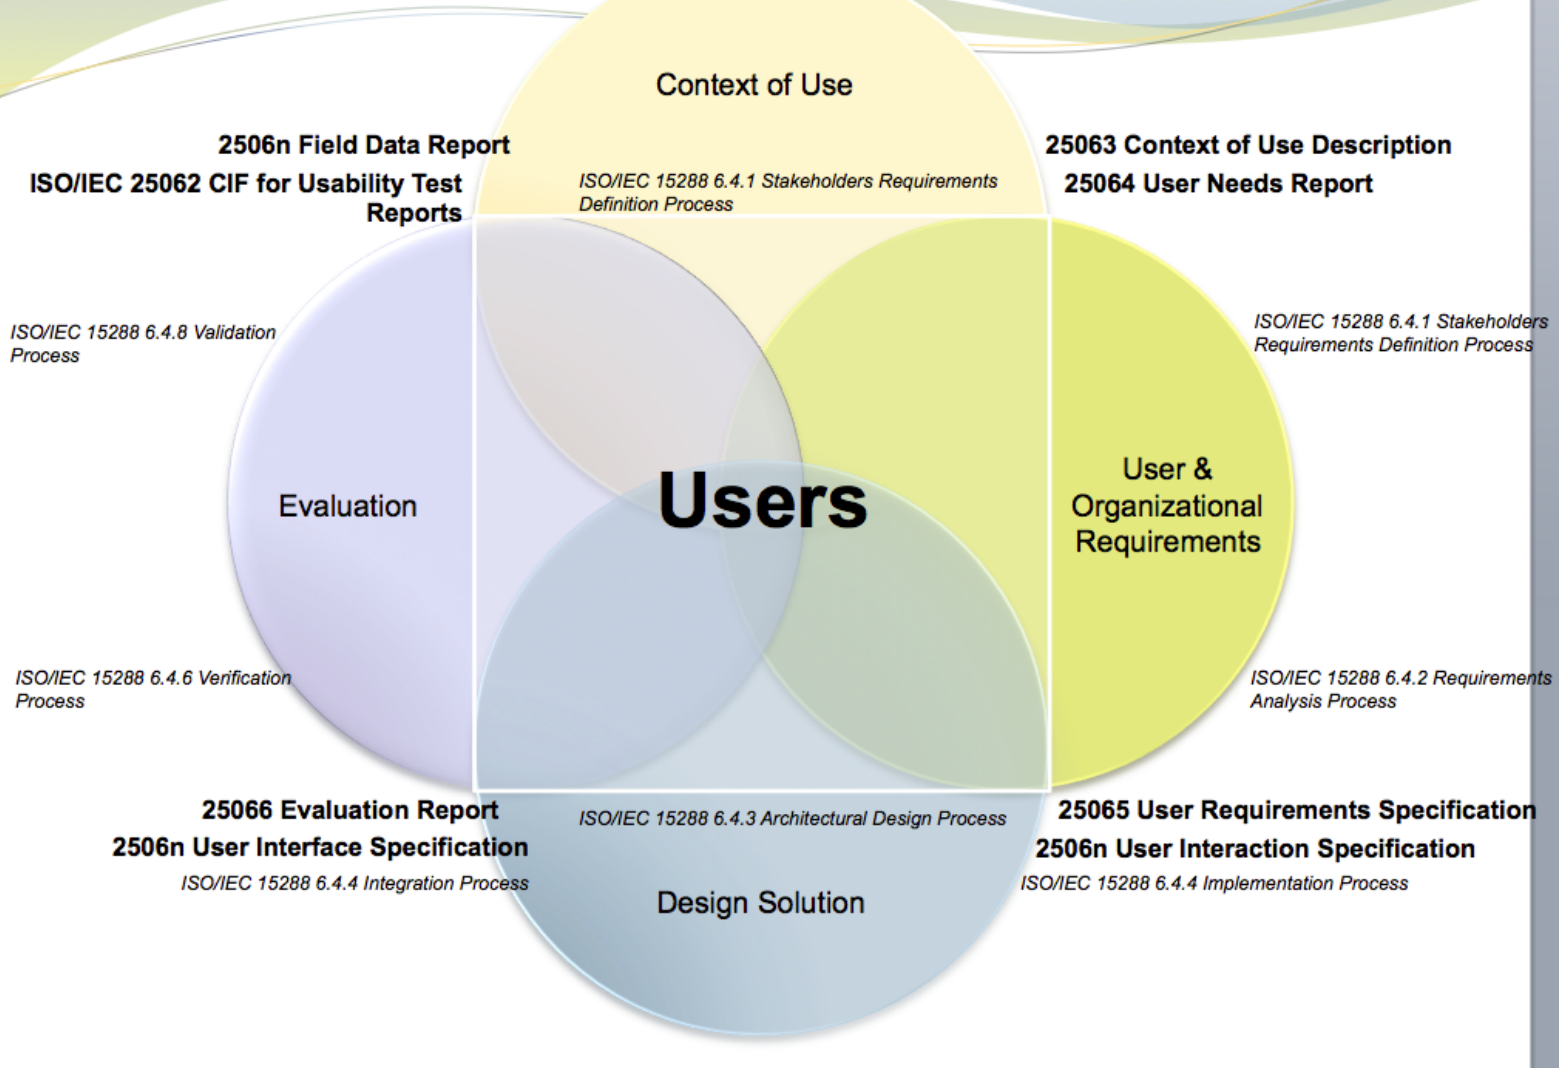

ISO 9241-210 Human Centered Design for Interactive Systems

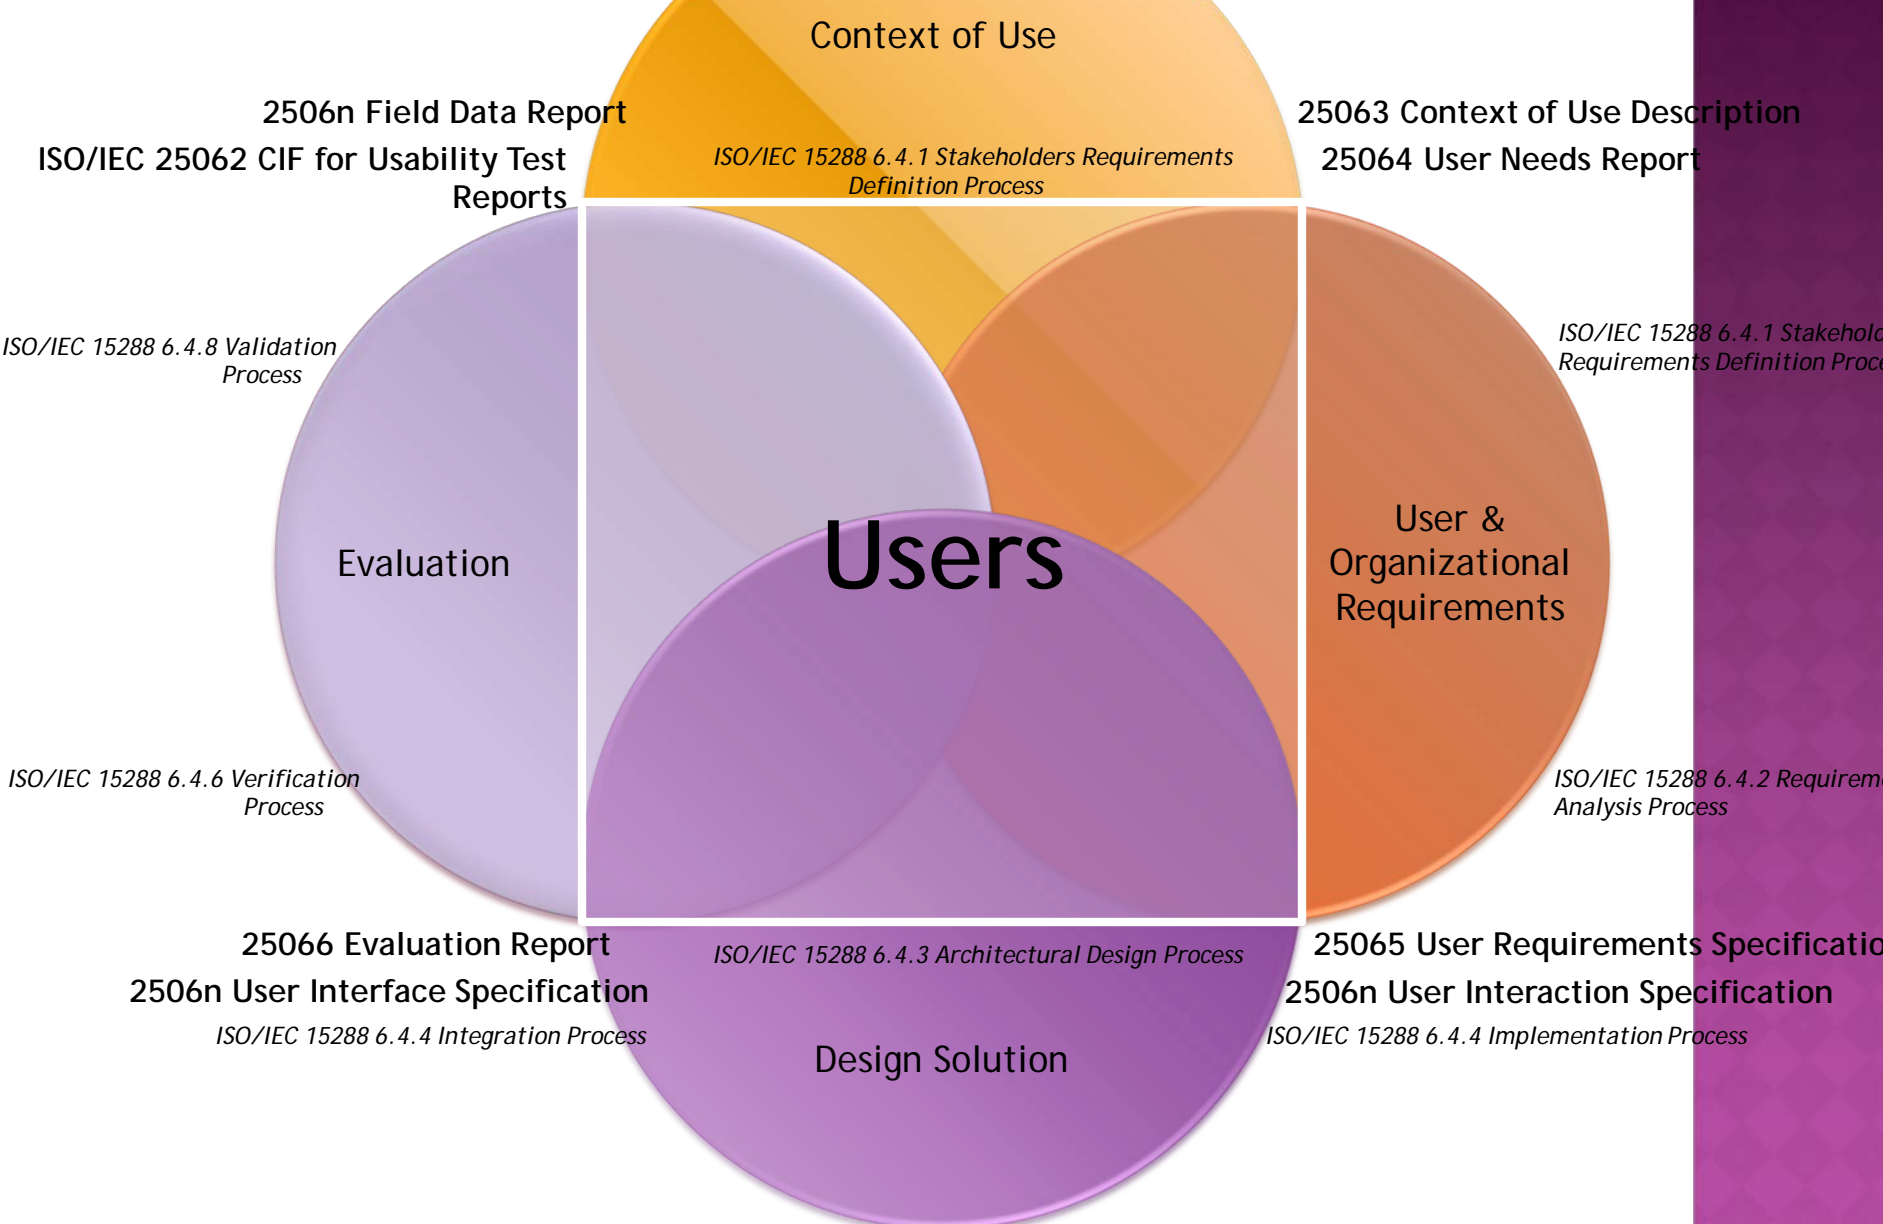

CONTACT INFORMATION

Mary Theofanos

National Institute of Standards and Technology

maryt@nist.gov

Acknowledge: Department of Homeland
Security Science and Technology Directorate
for their support of this research

NETWORK & COMMUNICATION CONSIDERATIONS FOR DIFFERENT MOBILE ARCHITECTURES

Ross J. Micheals





NIST

Mobile Best Practices Update

Workshop

30 Oct 2014

ARCHITECTURAL MODEL FROM BPR

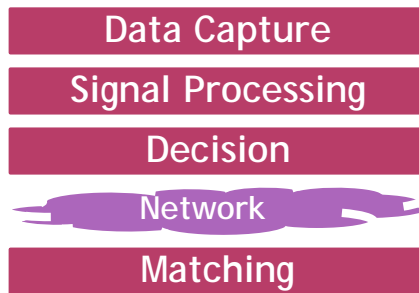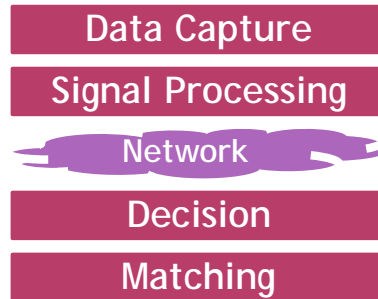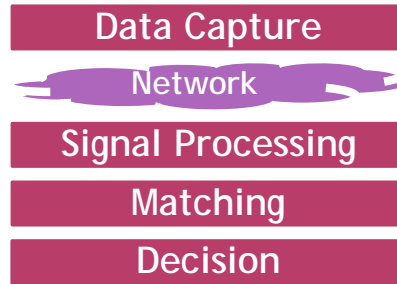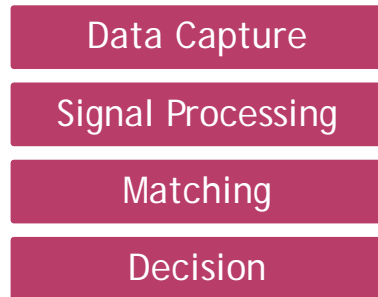

BPR recognizes that different components may be separated by a network

PROPOSED UPDATE

Data Capture

Interop Point

Signal Processing

Interop Point

Matching

Interop Point


Decision

- Generalize the “network” to an interoperability point; crossing a logical or physical boundary
- Multiple interop points (e.g. networks) are not just possible, but likely

EXAMPLE ARCHITECTURES



- Consider two components
 - sensors: (data capture and signal processing)
 - matchers: (matching and decision)
- Different ways they might be 'componentized'
- Illustrative and intended to stimulate discussion; not authoritative or a comprehensive treatment of all possible architectures

SENSOR—ALL EMBEDDED

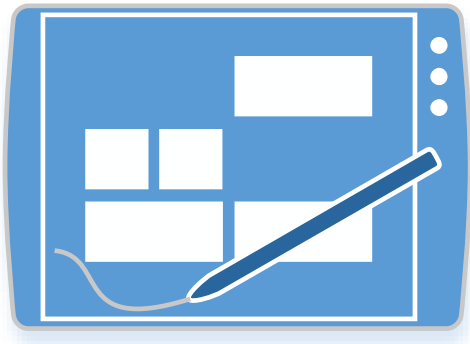


- Most flexible with respect to interoperability points
- Explicit interoperability points may not be present; if they are, they would not require traversing a physical network
- Component communications could happen in within the same process or through a variety of interprocess communications
- Easier to make decisions that resist changes later

SENSOR-CLIENT DEVICE TO EMBEDDED

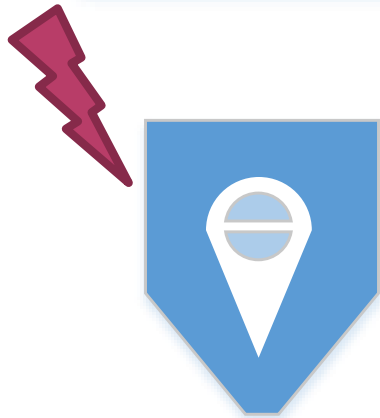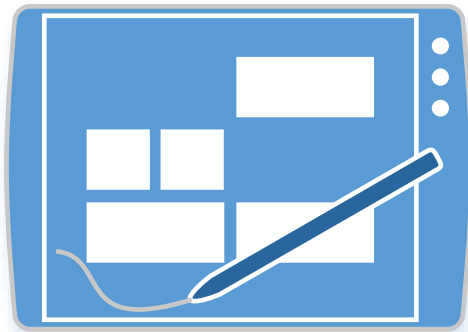

- Network traversal as client device requests capture and gets results
- Degree of signal processing may vary (e.g., does a template or an image come back?)
- (Typically) wireless communication might be Bluetooth, NFC, WiFi, or proprietary; **suggestion: make wired backup a best practice**
- Physical and logical integration is a sliding scale, (e.g. an intelligent 'sleeve')

SENSOR-CLIENT DEVICE TO TETHERED SENSOR

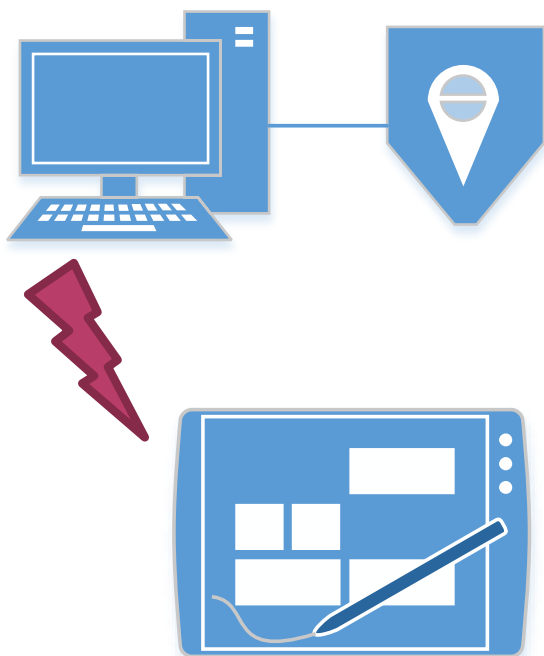

- Ability to leverage a great deal of computational and communications capabilities
- Network: Wireless/wifi (with Ethernet backup?)
- Enables the use of the widest variety of sensors with mobile devices:
 - Legacy
 - Luggable (e.g., DNA)
 - Fixed location (e.g., high resolution palm)

MATCHER—NO MATCHER






- Different scenarios may use a matcher at different stages during their usage
 - Data input preparation for a deployment
 - Offline matching
 - Research & development
- Systems supporting these must be designed to accommodate stages in which a matcher may not be 'online'

MATCHER—LOCAL MATCHER



- Matcher lives “inside” device; i.e., local ‘watch list’ with persons of interest;
- Similar to fully integrated client device
 - Most flexible with respect to interoperability points
 - Explicit interoperability points may not be present; if they are, they would not require traversing a physical network
 - Component communications could happen in process or through a variety of interposes communications
 - Easier to make decisions that resist changes later

MATCHER—REMOTE

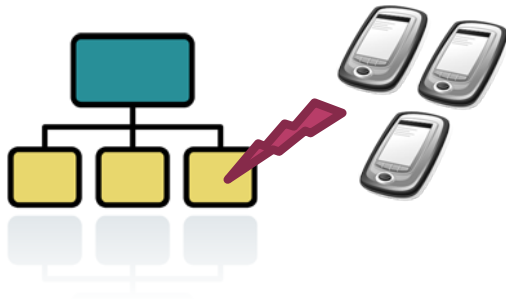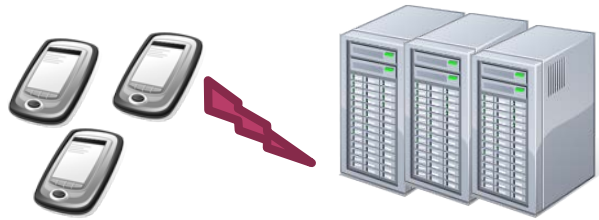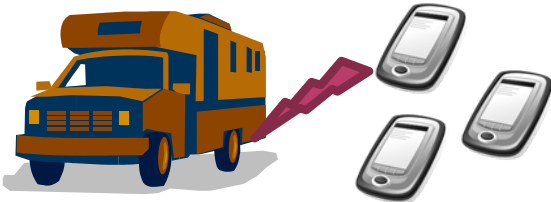

- Different scenarios may require different payloads
- Scenario/deployment
 - Centralized station specific to an incident response (ad hoc server)
 - Proprietary or “local” data formats may be okay
- Large-scale matcher
 - Cellular or satellite communications
 - Formal, “curated” formats (think EBTS, ANSI/NIST)
- Branch office
 - Matcher specific to a municipality;
 - Wifi or law enforcement-dedicated communications network
 - Could be a hybrid of custom and curated formats

WEB SERVICES

- Can be applied across a diverse set of architectures (even the all embedded)
- Use the protocols that underlie the web for machine-to-machine communications
 - Evolution of existing practice (e.g., SMTP for IAFIS)
 - Nearly universal; COTS friendly
 - Well tested

OPEN BIOMETRIC WEB SERVICE SPECIFICATIONS

- OASIS Biometrics TC
<http://tinyurl.com/biometricstc>
- **Biometric Identity Assurance Services (BIAS)**
 - *biometric operations (enroll, verify, identify)*
 - OASIS Standard SOAP Profile; based on INCITS 442:2010
- **WS-Biometric Devices**
 - *command and control of a biometric sensor*
 - OASIS Biometrics TC: Committee Specification Draft

QUESTIONS?

rossm@nist.gov

<http://bws.nist.gov>

[http:// tinyurl.com/biometricstc](http://tinyurl.com/biometricstc)


OTHER ISSUES TO CONSIDER

REMOVING GLASSES: IMPACT ON FACIAL RECOGNITION


- Slides presented separately

FINGERPRINT ACQUISITION PROFILES - THE FBI EXPERIENCE

Repository for Individuals of Special Concern (RISC) Pilot 2007

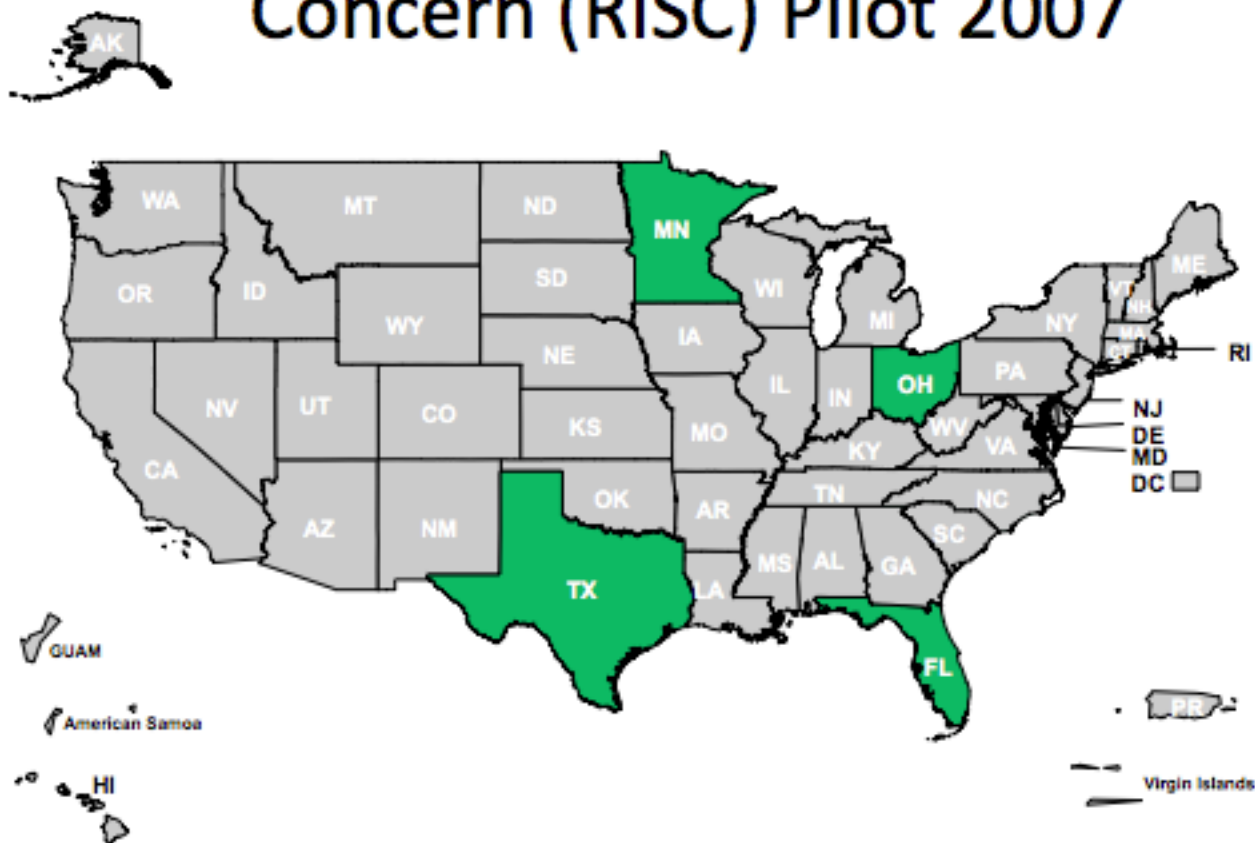

RISC Deployment 2014

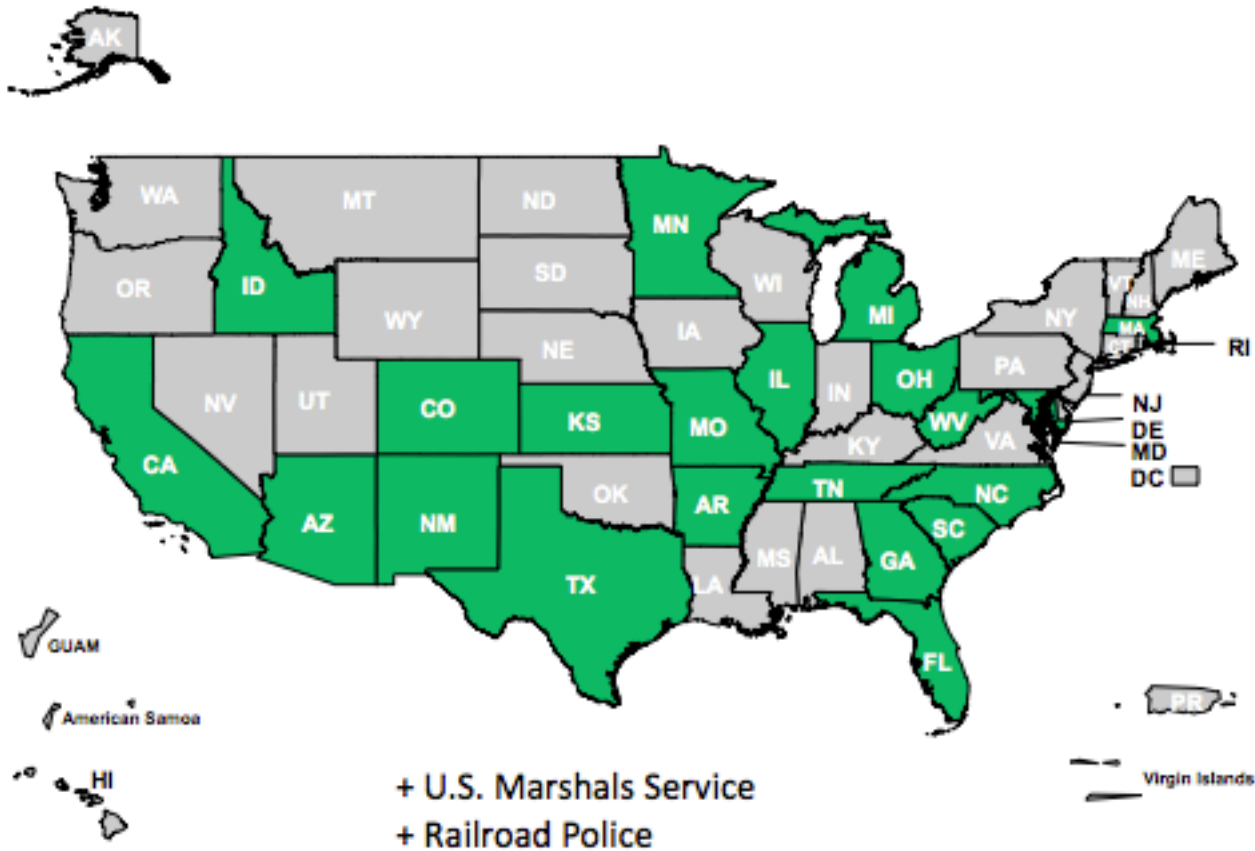

RISC Stats

Over 1.3 Million Transactions
Processed

- **Average Daily Submissions**
 - 1,605 (Peak 3,082)
- **Average Response Time**
 - 4.71 seconds
- **Average "Hit" Rate**
 - 4.16 %
- Yellow Responses = 0.39 %**
 - Yellows to "Red" = 72.5 %
- **Reject Responses = 0.14 %**

NIST Study

As a result of a CJIS Advisory Policy Board (APB) request, an independent study was conducted to examine the impact of Fingerprint Acquisition Profiles (FAPs) on the accuracy of RISC

In March 2014 the National Institute of Standards and Technology (NIST) completed a study titled:

NISTIR 7950

Examination of the Impact of Fingerprint Spatial Area Loss on Matcher Performance in Various Mobile Identification Scenarios

NIST Study

RISC Testing / Summary

- FPIR "False Positive" performance between FAP10 & FAP30 on the NGI RISC matcher appears to not be impacted significantly.
- FNIR "False Negative" performance between FAP10 & FAP30 is significant for #2 and #7 two finger submissions
 - 3.272% @FAP10
 - 1.844% @FAP20
 - 1.616% @FAP30
- If you must keep your FAP10 device, you may be able to get near-FAP30 performance by using FAP10 with 4 fingers (#2, #3, #7, #8 with FNIR of 1.714%) but sequencing errors may cause other headaches.
- EBTS- Study Results will be highlighted in a TOU and the document will be referenced in EBTS

FAP 10 and FAP 30

- CJIS “highly recommends” agencies deploying mobile ID devices searching RISC to procure FAP 30 or higher devices.
 - If agencies want to meet the RISC accuracy rate and submit only two fingerprint images, a FAP 30 device is optimal.
 - Agencies continuing to submit only two fingerprint images with FAP 10 devices may accept some risk.

Questions?

David L. Jones
Lead Analyst
david.jones3@ic.fbi.gov
304-625-4850

ADDING A NEW FAP 55 CODE FOR 3.2" X 2.0" IN MOBILE PLATFORMS

- ◉ FAP45 (two finger) sensors OK for ABIS field enrollment
- ◉ FAP45 not accepted by FBI/CJIS/Police for field booking.
- ◉ Need for mobile field enrollment is growing in US and international
- ◉ LES (film/TFT based) FAP55 sensor can take shape compatible with cell phone size and thickness goals.
- ◉ FAP55 (3.2" x 2") size meets "type 4" enrollment standard suitable for field booking (10print rolls)

Current situation

Reasons for adding FAP55

presentations

STANDARDS AND REFERENCE MATERIALS

ANSI/NIST-ITL

- ANSI/NIST-ITL has been updated to include new modalities that may be useful in mobile applications
 - Voice
 - DNA
- The Acquisition Profiles of the first BPR have been incorporated into the standard for face, fingerprint and iris.
- Updated data acquisition and data storage requirements and data transmission fields should be reflected in the new BPR


MOBILE ID TAXONOMY

- Based on DHS S&T Mobile Biometric Handheld Device (MBHD) Testing & Evaluation (2010-12)
 - Work was sponsored by DHS S&T HSARPA Resilient Systems Division (RSD)
 - Scope included:
 - Scenario & Use Case Analysis
 - Requirements Development
 - Test Framework Development

MBHD TAXONOMY

- Structural decomposition that provides a defined way to depict a mobile biometric handheld device into 5 subsystems
 - Each subsystem consists of components
 - Hardware
 - Software

MBHD TAXONOMY

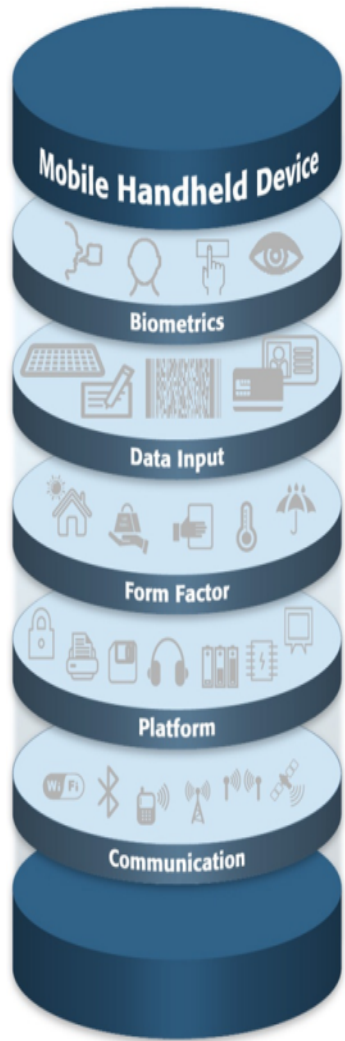

System	Mobile Biometric Handheld Device				
Subsystem	<i>Form Factor</i>	<i>Biometrics</i>	<i>Data Input</i>	<i>Platform</i>	<i>Communication</i>
Hardware Components	Chassis	Imager (size/characteristics)	Keyboard	Processor & Memory	Wired Connectivity
	Ingress Protections	Processor/Controller	Programmable Buttons	Power	Wireless Connectivity
	Battery Casings	Imager Housing	Pointing Devices	Output	
	Access Panels	Illuminator	Touchscreen	Display Device	
Software Components	N/A	Data Acquisition	Acquisition	Operating System	Network Management
		Signal Processing	Encoding/Decoding	Applications	Protocols
		Matching	Metadata Management	Formatting/Template	
		Data Management		Security	
		Template Generator*		Template Generator*	
		Interface Control		Protocol Management	
		Biometric Status Monitoring			
	Dynamic Workflow Manager				
	Spoofing/Evasion				


** Exists in multiple subsystems*

MBHD EXPANDED TAXONOMY

System	Mobile Biometric Handheld Device				
Subsystem	Form Factor	Biometrics	Data Input	Platform	Communication
Hardware Components	Chassis	<u>Imager (size/characteristics)</u>	Keyboard	<u>Processor & Memory</u>	<u>Wired Connectivity</u>
	Ingress Protections	Camera	Programmable	CPU	RS-232*
Hardware Components	Battery Casings	Sensor	Trackpad	Memory	Ethernet*
	Access Panels	Other	Mouse	<u>Power</u>	USB*
	External Connectors	Processor/Controller	Touchscreen	Battery	Firewire*
	Switches	<u>Imager Housing</u>	Stylus	Charging Circuit	Docking Station Interface*
		Frame	Microphone	Charge Status Indicator	Wiegand Interface*
		Seals	<u>Readers</u>	Charger Interface	<u>Wireless Connectivity</u>
		Protective Coating	Magnetic Stripe	Docking Station Interface*	PAN
		<u>Illuminator</u>	Bar Codes	<u>Output</u>	Bluetooth
		Optical	Smart Card	Speaker	Body Area Networks
		Flash	RFID	Printer	ZigBee
		Multi-Spectral	MRZ / OCR	<u>Display Device</u>	LAN
		IR	Other	Backlight	IEEE 802.11 a/g/n
				<u>Storage</u>	IEEE 802.11af
				Internal	WAN
				Fixed	GSM/GPRS/EDGE/UMTS
				External	1xEV-DO
				Remove	HSPA and HSPA+
				<u>Interfaces</u>	WiMAX (IEEE 802.16e and IEEE 802.16m)
				SAM	LTE and LTE-Advanced
				SDIO	Mobile Satellite Communication Systems
			Memory Expansion	Global Navigation Satellite Systems (GNSS)	
			RS-232*		
			Ethernet*		
			USB*		
			Firewire*		
			Docking Station Interface*		
			Wiegand Interface*		
			<u>Feedback</u>		
			LEDs		
			Symbols/Pictograms		
			Aural		
			Tactile (Haptic)		
Software Components	N/A	<u>Data Acquisition</u>	Acquisition	Operating System	<u>Network Management Protocols</u>
		<u>Signal Processing</u>	Encoding/Decoding	<u>Applications</u>	Secure Communications
		Segmentation	Metadata	General Status Monitoring	Mobile Virtual Private Network
		Quality		Dynamic Workflow Manager	
		Feature Extraction		Output Formatting	
		Template Generator*		<u>Formatting/Template</u>	
		<u>Matching</u>		Compression	
		On-Board (Biometric Module)		Encryption	
		Host/API/Software		Transmission	
		Workstation		Template Generator*	
		CMS		<u>Security</u>	
		<u>Data Management</u>		Physical Access Control	
		Storage		Logical Access Control	
		Case Management		Hard Drive Encryption	
		Template Generator*		Cryptography	
	Interface Control		Template Generator*		
	Biometric Status Monitoring		Protocol Management		
	Dynamic Workflow Manager				
	<u>Spoofing/Evasion</u>				
	Liveness				

*Exists in multiple subsystems


DEVICE COMPARISONS - BIOMETRICS

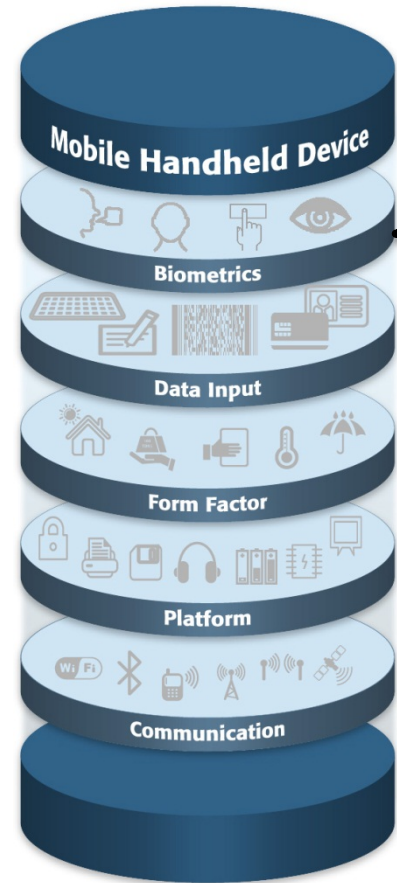

	HIIDE 5	Fusion	SEEK II	Mobile Ident II	MC75	BlueCheck	DSV2+ turbo	MorphoIdent	PIER-T
Fingerprint	✓	✓	✓	✓	✓	✓	✓	✓	
Single Flat	✓	✓	✓	✓	✓	✓	✓	✓	
Double Flat	✓		✓						
Rolled	✓		✓						
Face	✓	✓	✓	✓	✓	Optional			
Iris	✓	✓	✓						✓
Single Iris		✓							✓
Simultaneous	✓		✓						
On-board Matching	✓	✓	✓	✓	✓	✓	✓	✓	

*Trade names and company products have been listed in the text above. In no case does such identification imply recommendation or endorsement by Noblis or DHS S&T, nor does it imply that the products are necessarily the best available.


DEVICE COMPARISONS - DATA INPUT

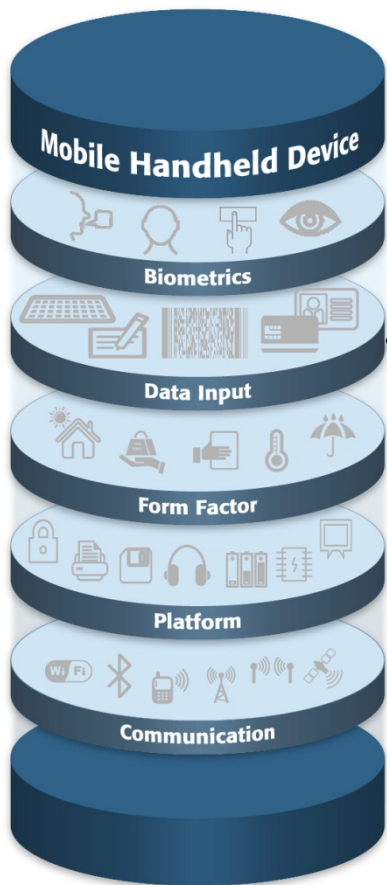

	HIIDE 5	Fusion	SEEK II	Mobile Ident II	MC75	BlueCheck	DSV2+ turbo	MorphoIdent	PIER-T
Physical Keyboard		✓	✓		✓				
Touchscreen	✓	✓	✓	✓	✓		✓	✓	
Programmable Buttons					✓		✓	✓	✓
Readers									
Contact Smartcard	✓		Optional		Optional		✓		
Contactless Smartcard					Optional		✓		
Barcode Reader					✓		✓		
Magnetic Stripe Reader				✓					
MRZ Encoding			Optional						

*Trade names and company products have been listed in the text above. In no case does such identification imply recommendation or endorsement by Noblis or DHS S&T, nor does it imply that the products are necessarily the best available.


DEVICE COMPARISONS - FORM FACTOR

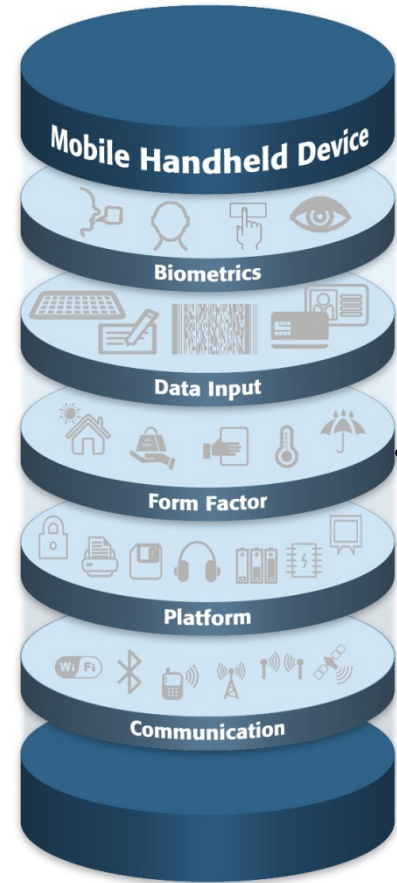

	HIIDE 5	Fusion	SEEK II	Mobile Ident II	MC75	BlueCheck	DSV2+ turbo	Morpholident	PIER-T
Weight									
< 1 lb				✓	✓	✓		✓	✓
1 - 3 lbs		✓					✓		
> 3lbs	✓		✓						
Size (LxWxD)	5 x 8 x 3	8.74 x 4.61 x 2.91	8.75 x 5.5 x 3.5	6 x 3.15 x 1.30	6 x 3.1 x 1.7	4.45 x 1.69 x 0.87	7.3 x 7.3 x 2	5.2 x 2.6 x 0.7	3.5 x 5.0 x 2.6
S/M/L	Large	Large	Large	Medium	Medium	Small	Large	Small	Medium
MIL-STD-810F	✓	✓	✓				✓		
IP Rating	54	65	65		54		54		

*Trade names and company products have been listed in the text above. In no case does such identification imply recommendation or endorsement by Noblis or DHS S&T, nor does it imply that the products are necessarily the best available.


DEVICE COMPARISONS - PLATFORM

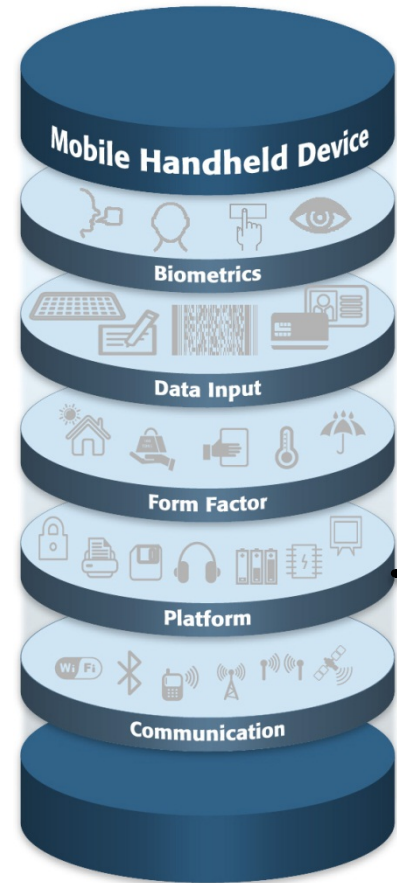

	HIIDE 5	Fusion	SEEK II	Mobile Ident II	MC75	BlueCheck	DSV2+ turbo	Morpholdent	PIER-T
CPU	Intel Atom				Intel Xscale		Renesas SH4 7760		TI dual core
Storage	80 GB SSD	128 MB Flash	64 GB SSD	128 MB Flash	256 MB Flash	2MB Flash	256 MB Flash		64 MB Flash
Display									
Size	5"	3.5"	4.1"	3.5"	3.5"		3.5"	2.4"	
Resolution	800x480	320x240	800x480	320x240	640x480	96x64	240x320	320x240	220x176
Battery									
Hot-swappable		✓	✓		Optional				
Lasts 8+ Hours	✓	✓			✓		✓	✓	
Peripheral Required?					✓	✓			✓

*Trade names and company products have been listed in the text above. In no case does such identification imply recommendation or endorsement by Noblis or DHS S&T, nor does it imply that the products are necessarily the best available.

DEVICE COMPARISONS - COMMS

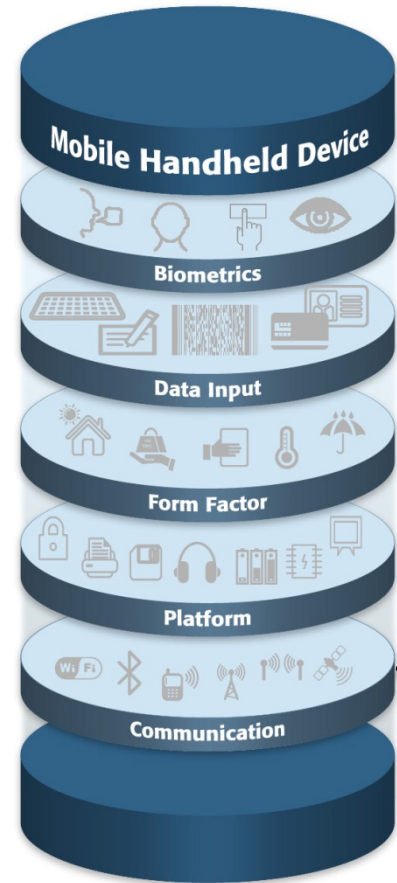


	HIIDE 5	Fusion	SEEK II	Mobile Ident II	MC75	BlueCheck	DSV2+ turbo	Morpholident	PIER-T
WiFi	✓	✓	✓	✓	✓		Optional		
Bluetooth	✓	✓	✓	✓	✓	✓	Optional	✓	
GSM	✓	✓		✓	✓		Optional		
CDMA	✓	✓		✓	✓		Optional		
4G	✓								
Ethernet	✓		✓						
USB	✓	✓	✓	✓	✓	✓	✓	✓	✓
Docking Station						Optional	✓		
GPS	✓	✓	✓	Optional	✓				

*Trade names and company products have been listed in the text above. In no case does such identification imply recommendation or endorsement by Noblis or DHS S&T, nor does it imply that the products are necessarily the best available.

COTS DEVICES MAPPED TO THE TAXONOMY (2011-12)

○ Analyzed over 30 COTS MBHD devices*

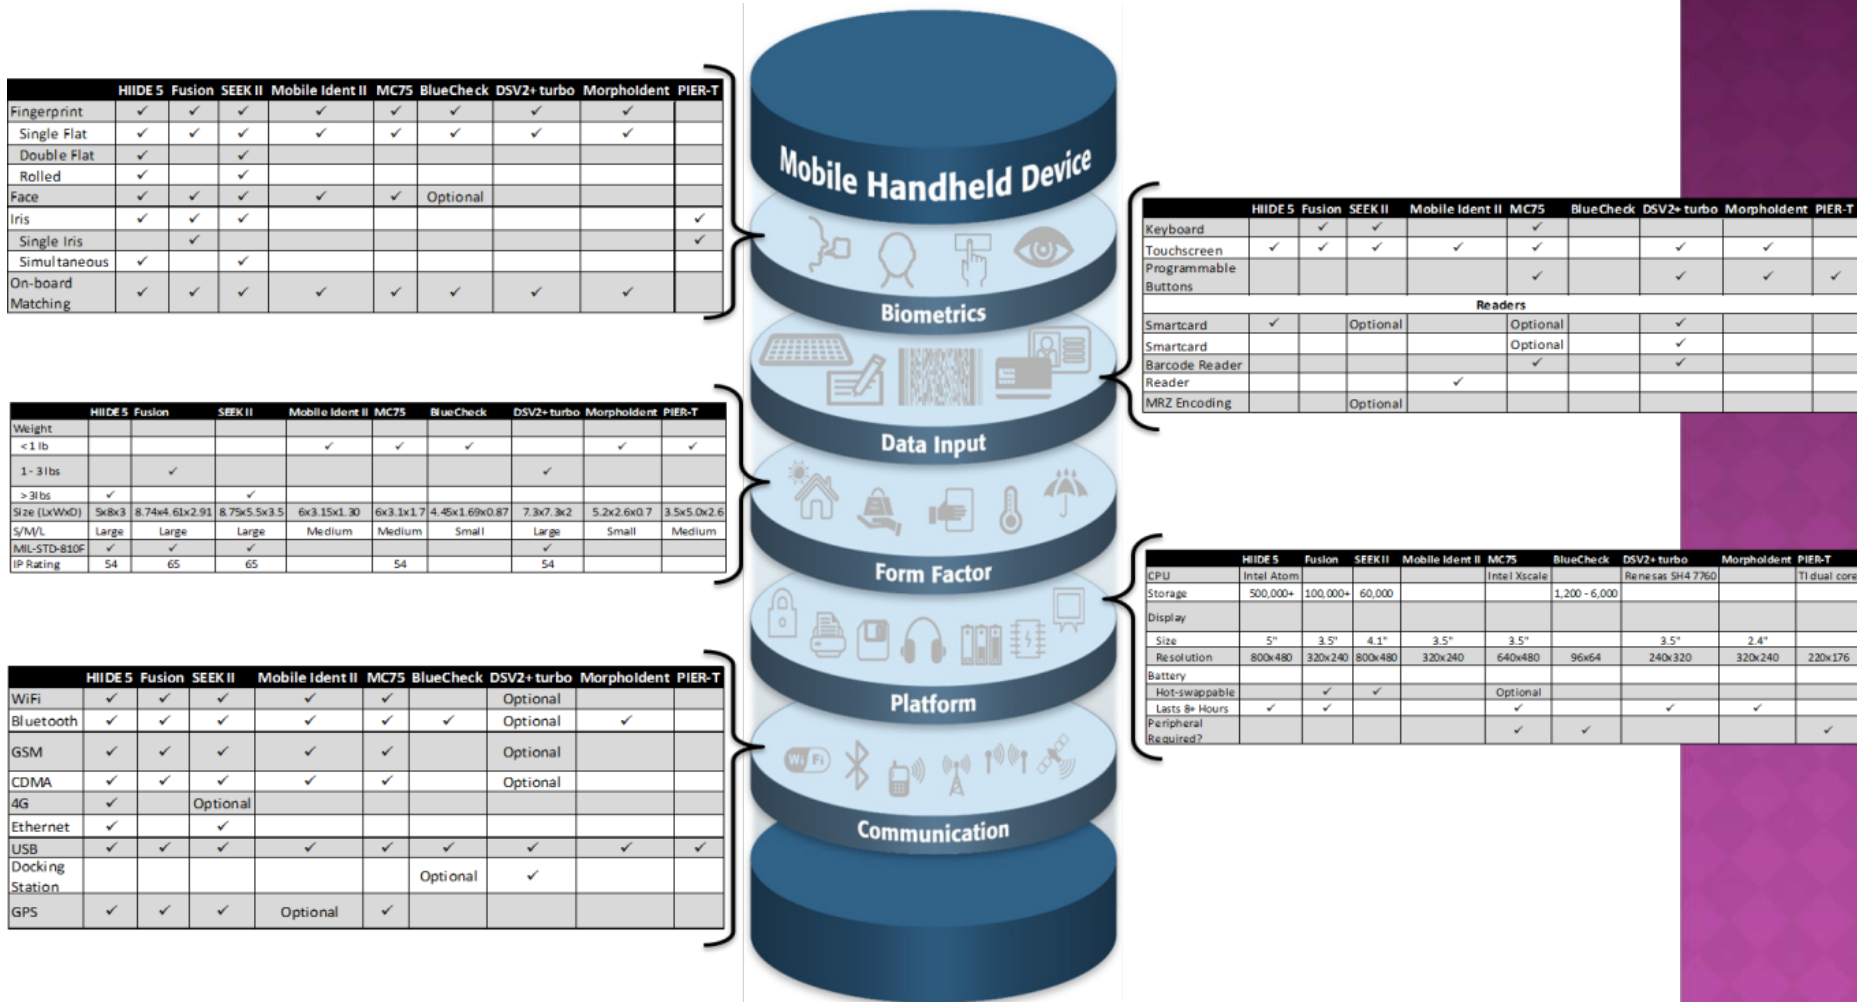

*Trade names and company products have been listed in the text above. In no case does such identification imply recommendation or endorsement by Noblis or DHS S&T, nor does it imply that the products are necessarily the best available.

SECTION 12.2 WIRELESS COMMUNICATION

Original BPR Sections

- **Wireless Connectivity**
- **Cellular Connectivity**
 - GSM/GPRS/EDGE/UMTS
 - CDMA/1XRTT/EVDO/EVDM
 - HSDPA/WCDMA
- **Satellite Communications**
- **802.11 b/g**
- **Bluetooth**
- **Global Positioning System (GPS)**
- **Integrated Wireless Antenna**
- **Wireless Connection Status**

Updates needed to reflect current technology

- **Wireless Personal Area Networks (WPANs)**
 - BlueTooth® (IEEE 802.15.3)
 - ZigBee (IEEE 802.15.4)
 - 6LoPAN (IEEE 802.15.4)
 - Mesh sensor networks (IEEE 802.15.5)
 - Body Area Networks (IEEE 802.15.6)
- **Wireless Local Area Networks (WLANs)**
 - IEEE 802.11a/g/n/ac
- **Wide Area Networks (WANs)**
 - HSPA and HSPA+
 - WiMAX (IEEE 802.16e and IEEE 802.16m)
 - LTE and LTE-Advanced
- **Regional Area Networks (TV White Space) [IEEE 802.22]**
- **Mobile Satellite Communication Systems**
- **Global Navigation Satellite Systems (GNSS)**

Note: List is non-exhaustive.

SECTION 13 ENVIRONMENTAL CONSIDERATIONS - UPDATES NEEDED?

Environmental Profile	Description														
Indoor (Normal)	<p>office environments such as an office building, court of law, etc.</p> <table border="1" data-bbox="834 311 1669 439"> <tr> <td>Operating temperatures</td> <td>From 32°F to 104°F (0°C to 40°C)</td> </tr> <tr> <td>Storage temperatures</td> <td>From 14°F to 122°F (-10°C to 50°C)</td> </tr> <tr> <td>Relative humidity</td> <td>max. 85% non condensing</td> </tr> <tr> <td>Ingress Protection Rating (IP Code)</td> <td>IP 40 or higher</td> </tr> </table>	Operating temperatures	From 32°F to 104°F (0°C to 40°C)	Storage temperatures	From 14°F to 122°F (-10°C to 50°C)	Relative humidity	max. 85% non condensing	Ingress Protection Rating (IP Code)	IP 40 or higher						
Operating temperatures	From 32°F to 104°F (0°C to 40°C)														
Storage temperatures	From 14°F to 122°F (-10°C to 50°C)														
Relative humidity	max. 85% non condensing														
Ingress Protection Rating (IP Code)	IP 40 or higher														
Law Enforcement (Moderate)	<p>Indoor/outdoor, i.e. patrol officer or in patrol car</p> <table border="1" data-bbox="834 525 1669 739"> <tr> <td>Operating temperatures</td> <td>From 14°F to 122°F (-10°C to 50°C)</td> </tr> <tr> <td>Storage temperatures</td> <td>From -4°F to 140°F (-20°C to 60°C)</td> </tr> <tr> <td>Relative humidity</td> <td>10% - 90% non condensing</td> </tr> <tr> <td>Ingress Protection Rating (IP Code)</td> <td>IP 54 or higher, in operational configuration, with any existing expansion port closed</td> </tr> <tr> <td>Drop resistance</td> <td>Resistance to multiple drops on concrete from a height of 3 feet (91 cm).</td> </tr> </table>	Operating temperatures	From 14°F to 122°F (-10°C to 50°C)	Storage temperatures	From -4°F to 140°F (-20°C to 60°C)	Relative humidity	10% - 90% non condensing	Ingress Protection Rating (IP Code)	IP 54 or higher, in operational configuration, with any existing expansion port closed	Drop resistance	Resistance to multiple drops on concrete from a height of 3 feet (91 cm).				
Operating temperatures	From 14°F to 122°F (-10°C to 50°C)														
Storage temperatures	From -4°F to 140°F (-20°C to 60°C)														
Relative humidity	10% - 90% non condensing														
Ingress Protection Rating (IP Code)	IP 54 or higher, in operational configuration, with any existing expansion port closed														
Drop resistance	Resistance to multiple drops on concrete from a height of 3 feet (91 cm).														
Military (Extreme)	<p>harsh environments, such as extreme temperatures, exposure to dust, sand, rain, water splashes, vibrations, and dropping of the device.</p> <table border="1" data-bbox="834 858 1669 1415"> <tr> <td>Operating temperatures</td> <td>From -20°F to 140°F (-29°C to 60°C) according to MIL-STD-810F Method 501.4 Procedure II at 140°F MIL-STD-810F Method 502.4 Procedure II at -20°F</td> </tr> <tr> <td>Storage temperatures</td> <td>From -20°F to 140°F (-29°C to 60°C) according to MIL-STD-810F Method 501.4 Procedure I at 140°F MIL-STD-810F Method 502.4 Procedure I at -20°F</td> </tr> <tr> <td>Relative humidity</td> <td>MIL-STD-810F Method 507.4</td> </tr> <tr> <td>Rain</td> <td>MIL-STD-810F Method 506.4 Procedure I</td> </tr> <tr> <td>Ingress Protection Rating (IP Code)</td> <td>IP 65 or higher, in operational configuration, with any existing expansion port closed</td> </tr> <tr> <td>Drop resistance</td> <td>The devices should comply with MIL-STD-810F Method 516.5 – Procedure IV (Transit Drop), in non-operational configuration. If the devices do not contain a hard drive, compliance is required also in the operational configuration.</td> </tr> <tr> <td>Vibration resistance</td> <td>The devices should comply with MIL-STD-810F Method 514.5 – Procedure I (General Vibration), in both operational and non-operational configurations.</td> </tr> </table>	Operating temperatures	From -20°F to 140°F (-29°C to 60°C) according to MIL-STD-810F Method 501.4 Procedure II at 140°F MIL-STD-810F Method 502.4 Procedure II at -20°F	Storage temperatures	From -20°F to 140°F (-29°C to 60°C) according to MIL-STD-810F Method 501.4 Procedure I at 140°F MIL-STD-810F Method 502.4 Procedure I at -20°F	Relative humidity	MIL-STD-810F Method 507.4	Rain	MIL-STD-810F Method 506.4 Procedure I	Ingress Protection Rating (IP Code)	IP 65 or higher, in operational configuration, with any existing expansion port closed	Drop resistance	The devices should comply with MIL-STD-810F Method 516.5 – Procedure IV (Transit Drop), in non-operational configuration. If the devices do not contain a hard drive, compliance is required also in the operational configuration.	Vibration resistance	The devices should comply with MIL-STD-810F Method 514.5 – Procedure I (General Vibration), in both operational and non-operational configurations.
Operating temperatures	From -20°F to 140°F (-29°C to 60°C) according to MIL-STD-810F Method 501.4 Procedure II at 140°F MIL-STD-810F Method 502.4 Procedure II at -20°F														
Storage temperatures	From -20°F to 140°F (-29°C to 60°C) according to MIL-STD-810F Method 501.4 Procedure I at 140°F MIL-STD-810F Method 502.4 Procedure I at -20°F														
Relative humidity	MIL-STD-810F Method 507.4														
Rain	MIL-STD-810F Method 506.4 Procedure I														
Ingress Protection Rating (IP Code)	IP 65 or higher, in operational configuration, with any existing expansion port closed														
Drop resistance	The devices should comply with MIL-STD-810F Method 516.5 – Procedure IV (Transit Drop), in non-operational configuration. If the devices do not contain a hard drive, compliance is required also in the operational configuration.														
Vibration resistance	The devices should comply with MIL-STD-810F Method 514.5 – Procedure I (General Vibration), in both operational and non-operational configurations.														

WEARABLE BIOMETRIC CAPTURE DEVICES

- Several different types, some including multiple modalities (usually face and voice)
 - Google glasses
 - Near-field communications
 - Disney's MyMagic wristband
 - Bionym electrocardiogram bracelets
 - Cameras worn by police to record incidents
 - Built-in facial recognition to compare against local watchlists
 - Voice capture for later forensic analysis
 - Medical device monitors
 - Helmets with iris recognition (to ID wearer) in goggles
 - Micro-feature recognition and gesture recognition
 - Biometrically verified weapons use
 - And more!

SOME CHALLENGES FOR MOBILE ID THAT MAY BE DIFFERENT THAN FIXED LOCATION UNITS

- ◉ 3D printing of body parts / Reconstructive surgery
- ◉ Spoofing and non-cooperative / un-cooperative behavior that is not likely or typical at fixed location units
- ◉ Failure-to-acquire protocols
- ◉ Privacy and use of data (particularly for DNA)
- ◉ Disposal of the mobile unit (including erasure of data)
 - Some units may be designed for one-time or limited use
- ◉ Protocols for data handling (including erasure of data) during field ops
- ◉ Remote or timed disabling operations of the unit (if stolen or misplaced)
- ◉ Mobile medical screening combined with biometrics
- ◉ Admissibility of data / match results for law enforcement applications
- ◉ Interoperability and verified linking of data
- ◉ Additional automated modalities (hair pattern growth on face, ear shape, ocular region, blood type, classifiers for 'soft' biometrics: height / weight / age / ethnicity / gender / tattoo and scar, etc.)
- ◉ Combination with / in devices designed to show exposure to explosives, illegal drugs, pathogens, etc.
- ◉ Combination with / in devices to detect health and responsiveness of persons under medical care, in battlefields, or under supervised detention or quarantine
- ◉ Operation in harsh environments and under dangerous situations
- ◉ Verification of identity of the unit operator and data entry personnel

IRIS ACQUISITION GUIDANCE

James Cambier, Ph.D.
Crossmatch Technologies, Inc.


- MobileID BPR for iris images should be consistent with current and emerging standards:
 - ISO/IEC 19794-6:2011 Information technology - Biometric data interchange formats - Iris image data
 - FDIS 29794-6 Information technology - Biometric sample quality - Iris image data
- Three areas of inconsistency
 - Image MTF and pixel resolution
 - Illumination wavelength
 - Minimum distance (margin) from iris outer boundary to closest image boundary

MTF AND PIXEL RESOLUTION

Attribute	MobileID BPR	19794-6	29794-6
Contrast		0.60	0.50
Spatial frequency, cycles/mm		2	2
Spatial sample rate, pixels/mm	10.8 - 21.0*, no upsampling	10	15.7

*derived from specified range of iris diameter in pixels (140 - 210) and typical range of iris diameter of 10mm - 13mm


MTF AND PIXEL RESOLUTION

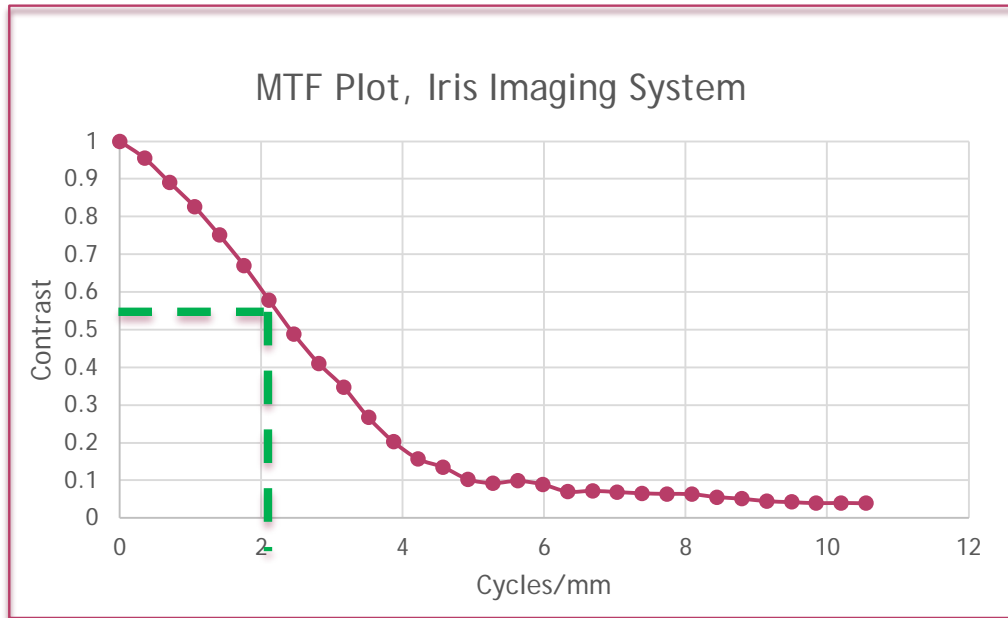

Recommendations:

- Specify spatial sampling rate directly in pixels/mm, not iris diameter
- Adopt MTF recommendations of 19794-6:2011.
- Spatial sample rate of 10 pixels/mm is reasonable estimate of Nyquist rate for typical imaging system using COTS optics
- Allow upsampling from 10 pixels/mm if algorithms require higher minimum iris diameter (in pixels)

ILLUMINATION WAVELENGTH

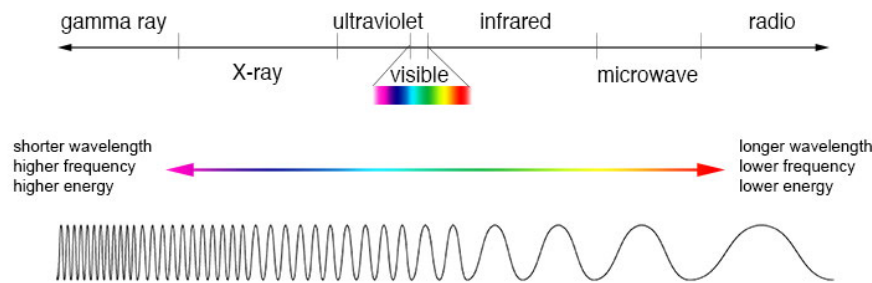


- ◉ Iris imaging systems use near-IR illumination within the 700-900 nm wavelength range
- ◉ Experience indicates that a wide range of wavelengths is needed to accommodate a variety of eye colors
- ◉ Mobile devices may require more limited spectral distributions to reduce size and power requirements

ILLUMINATION WAVELENGTH

MobileID BPR	19794-6	29794-6
Any 100 nm band within 700-900 nm must contain $\geq 35\%$ of total energy	Illumination energy should be emitted at wavelengths in 700-900 nm range, and should be $\geq 5^\circ$ off-axis to prevent "red-eye" effect	$\geq 90\%$ of energy shall be within 700-900 nm band; $\geq 35\%$ of energy in 700-900 nm range shall be within 800-900 nm band

Recommendation: Adopt specification from 29794-6 to provide maximum design flexibility for mobile devices

IMAGE MARGIN REQUIREMENTS

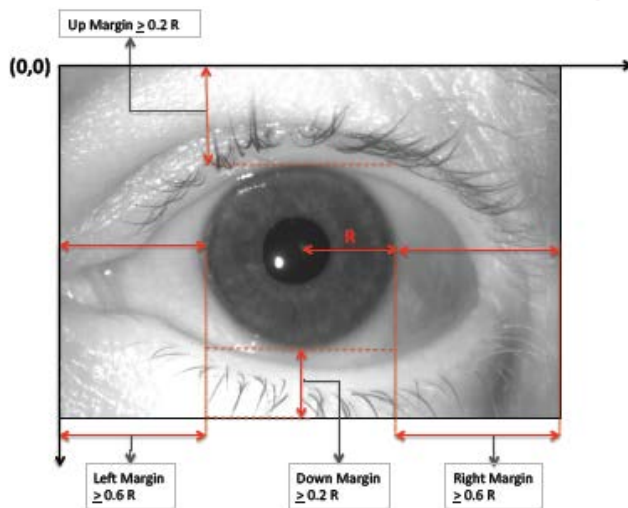

Parameter	MobileID BPR	19794-6	29794-6
Vertical margin	0.5 x diameter	0.2 x radius	0.2 x radius
Horizontal margin	0.25 x diameter	0.6 x radius	0.6 x radius

Recommendation: Adopt 19794-6, 29794-6 specifications

OPEN DISCUSSION

- ◉ Additional topics to be considered
- ◉ Formation of subject matter groups
- ◉ Selection of working group leads
- ◉ Development of a timeframe

ADJOURN