

3 Dispersible Engineered Nanomaterials

4
5 NIST S 7101.54

6 Document Approval Date: 01/05/2021

7 Effective Date: 04/18/2014
8
9

10 1. PURPOSE

11 The purpose of the NIST DENMs Program is to eliminate or minimize occupational exposure to
12 DENMs and to make NIST employees and associates aware of the potential airborne and dermal
13 hazards associated with exposure.¹
14
15

16 2. BACKGROUND

17 This suborder supersedes NIST Health and Safety Instruction (HSI) 23, Handling of Dispersible
18 Engineered Nanomaterials, May 2009.
19
20

21 3. APPLICABILITY

22 This suborder applies to all NIST facilities and to all NIST employees and associates who work
23 with DENMs unless an authoritative government entity (*e.g.*, OSHA, EPA, or NIOSH) has
24 published information confirming that a particular DENM is not hazardous.
25
26

27 4. REFERENCES

- 28 a. General Safe Practices for Working with Engineered Nanomaterials in Research
29 Laboratories, Department of Health and Human Services (DHHS) [National Institute for
30 Occupational Safety and Health (NIOSH)] Publication Number 2012-147.
31
- 32 b. Current Intelligence Bulletin 63: Occupational Exposure to Titanium Dioxide DHHS
33 (NIOSH) Publication 2011-160.
34
- 35 c. Current Intelligence Bulletin 65: Occupational Exposure to Carbon Nanotubes and
36 Nanofibers, DHHS (NIOSH) Publication Number 2013-145.

¹ Terms are defined in Section 7; acronyms are defined in Section 8.

- 37 d. Approaches to Safe Nanotechnology: Managing the Health and Safety Concerns Associated
38 with Engineered Nanomaterials, DHHS (NIOSH) Publication Number 2009-125.
39
40 e. Safe Nanotechnology in the Workplace, DHHS (NIOSH) Publication Number 2008-112.
41
42 f. U.S. Environmental Protection Agency: Nanotechnology White Paper, EPA 100/B-07/001,
43 February 2007.
44
45 g. American National Standard, Occupational and Educational Eye and Face Protection, ANSI
46 Z87.1-1989 (or more recent version).
47

48 49 **5. APPLICABLE NIST DIRECTIVES**

- 50 a. NIST S 7101.20: [Work and Worker Authorization Based on Hazard Reviews](#)
51
52 b. NIST S 7101.21: [Personal Protective Equipment](#)
53
54 c. NIST S 7101.58: [Respiratory Protection](#)
55
56 d. NIST S 7101.59: [Chemical Hazard Communication](#)
57
58 e. NIST S 7101.22: *Hazard Signage*
59

60 61 **6. REQUIREMENTS**

62 Using DENMs at NIST requires OUs to be aware of their potential hazards and to provide their
63 employees and associates with a workplace free from the recognized hazards.
64

65 These elements entail identification of potential hazards, implementation of engineering and
66 administrative controls, guidance on the selection of PPE, and training.
67

68 a. Hazard Review Process

69
70 (1) DENMs shall be identified prior to commencement of new processes and changes to
71 existing processes in the work area.
72

73 (2) The hazard review process shall include the following considerations to minimize the
74 hazards of and the possibility of exposure to DENMs:
75

76 (a) Selection of DENM forms, quantities, and processes;

- 77 i. DENMs used in dry (e.g., powder) form, embedded in solid materials, or
78 suspended in liquids all have the potential to become airborne and inhaled,
79 depending on how they are used. Processes involving, but not limited to, the
80 following have the potential to result in airborne DENMs in the surrounding
81 environment:
82
- 83 (i) The use of dry DENMs or DENM-containing dry materials;
 - 84
 - 85 (ii) The abrading, cutting, cleaving, breaking, or crushing of DENM-containing
86 solid materials;
 - 87
 - 88 (iii) The intentional or unintentional aerosolization of DENM-containing liquids;
89 or
 - 90
 - 91 (iv) The production or handling of DENM-containing byproducts, such as those
92 resulting from the evaporation of DENM-containing liquids.
 - 93
- 94 (b) All routes of possible exposure to DENMs, including inhalation, ingestion, injection,
95 and dermal contact (including eye and other mucus membranes);
96
- 97 (c) The properties of the precursor materials as well as those of the resulting
98 nanomaterial product; and
99
- 100 (d) The need for DENM-specific spill-containment and cleanup equipment and
101 procedures.
102
- 103 (3) If the hazard review process identifies a potential exposure to DENMs, then a
104 consultation should be scheduled with a competent person to perform an exposure
105 assessment, including exposure monitoring, if warranted, and to advise on the
106 applicability of the requirements of this suborder as needed.
107
- 108 b. Engineering Controls
109
- 110 (1) Processes capable of generating airborne DENMs shall be conducted in a recirculating
111 hood equipped with HEPA or ULPA or a chemical fume hood, ideally equipped with
112 HEPA or ULPA.
113

- 114 (a) Laminar-flow clean benches should not be used for DENMs, as these systems are
115 designed for product protection, as opposed to user protection.²
116
- 117 (2) Hoods shall be under negative air pressure with respect to the rest of the laboratory space.
118
- 119 (3) Hoods shall be serviced, maintained, and performance tested in accordance with
120 manufacturers' instructions.
121
- 122 (4) In the event that the face velocity on a hood falls outside the range of face velocities
123 specified by the manufacturer, e.g., as indicated by a hood-flow-monitor alarm, work
124 shall stop until the face velocity has been restored to the specified range.
125
- 126 c. Administrative and Work Practice Controls
127
- 128 (a) Upon receipt, packages containing DENMs shall be opened and inspected within a
129 recirculating hood equipped with HEPA or ULPA or a chemical fume hood, ideally
130 equipped with HEPA or ULPA;
131
- 132 (2) When not in use, all forms of DENMs shall be in tightly-closed, chemically-compatible
133 containers³.
134
- 135 (3) All DENMs shall be segregated and stored according to the hazards associated with
136 constituent chemical properties.
137
- 138 (4) All working surfaces (e.g., benches, glassware, apparatus, exhaust hoods, support
139 equipment) shall be maintained as free as possible of DENM contamination.
140
- 141 (5) Surfaces on which DENMs might settle shall be wiped with a moistened towel or wipe,
142 which shall be disposed of as hazardous waste (see below).
143
- 144 (6) Wet wiping or a dedicated HEPA vacuum shall be used for cleaning DENMs in dry form.
145 (a) Dry sweeping and the use of compressed air is prohibited.
146
- 147 d. Selection of PPE
148
- 149 (1) PPE selection shall be based on the NIST hazard review process and be in accordance
150 with the requirements of the NIST PPE Program.

² If it is necessary to conduct work using a laminar-flow clean bench, schedule a consultation with the OSHE DENM Program Manager.

³ If DENMs have the potential to react and pressurize a closed container, consult with the DENM Program Manager on obtaining an appropriate container.

151 (a) Hand protection, when required by the hazard review, shall take into account the
152 properties of the DENMS, the properties of any associated chemicals to be used, and
153 the properties of any byproducts that may result from reactions of the DENMs and
154 associated chemicals.

155
156 (b) Eye and face protection, when required by the hazard review, shall, at a minimum,
157 consist of ANSI Z87-compliant safety glasses.

158
159 i. Higher levels of eye protection may be necessary depending on the process and
160 type of DENM being used. For example, safety goggles may be required when
161 working with DENMs in liquid form with a potential to aerosolize and enter
162 workers' eyes.

163
164 (c) Air-purifying respirators, when required by the hazard review, shall be equipped with
165 a minimum of a P-100 filter.

166
167 e. Medical Evaluation
168 Employees and associates involved in incidents resulting in exposure to DENMs should have a
169 post-incident evaluation conducted and documented by a medical professional.

170
171 f. Waste Disposal
172 Materials contaminated with DENMs, including PPE (e.g., used gloves), cleaning fluids, used
173 HEPA filters, and wipes, shall be placed in sealable, labeled waste containers and disposed of as
174 hazardous waste.⁴

175
176 g. Spill Response

177
178 (1) General

179
180 (a) The spill clean-up procedure below shall be followed if a spill of DENMs occurs and
181 the personnel involved are familiar with the hazards of the spilled material and are
182 confident they can safely control the hazards. Otherwise, the spill shall be reported
183 immediately by calling the Safety Assistance Center at x5375, Option 3.

184
185 (2) Spill Clean-Up Procedure

186
187 (a) Remove all ignition sources, if possible;

188
189 (b) Contain the spill;

⁴ Waste disposal procedures and containers can be obtained by calling the Safety Assistance Center at x5375, Option 3.

190 (c) Before selecting a cleaning method, consider the physical and chemical properties of
191 the DENMs and potential reactions with cleaning materials and equipment (e.g.,
192 vacuum cleaner filters and canisters);

193
194 (d) If it is necessary to vacuum dry DENMs, ensure that a HEPA vacuum is used and that
195 precautions are taken when changing the filter and/or emptying the vacuum to ensure
196 that DENM's are not reintroduced into the work area;

197
198 (e) Dispose of the spill clean-up materials as hazardous waste; and

199
200 (f) Prohibit re-entry of the work area until it has been cleared for occupancy..

201
202 h. Hazard Signage

203 If an authoritative government entity has published evidence that a DENM is potentially
204 hazardous, then specific hazard signage with the signal word "**Caution**" shall be posted where
205 the DENMs will be handled (e.g., on recirculating or chemical fume hoods). See Appendix A
206 for example signage.

207
208 i. Training

209 Training provided by OSHE on the DENMs program and activity-specific training required by
210 applicable hazard reviews shall be assigned and documented, and its completion by affected
211 employees and associates recorded in accordance with the requirements, roles and
212 responsibilities of the NIST Safety Education and Training suborder.

213
214 j. Records of Hazard Assessments

215 The results of the exposure assessments conducted by competent persons shall be noted,
216 referenced, or included in the activity-hazard-review documentation.

217
218
219 **7. DEFINITIONS**

220 a. Competent Person – A CIH, CSP, or CHMM in the NIST Office of Safety, Health and
221 Environment (OSHE) or another NIST Organizational Unit (OU), a consultant CIH, CSP or
222 CHMM, or an individual directed by a CIH, CSP, or CHMM capable of anticipating,
223 recognizing, controlling, and evaluating potential occupational hazards.

224
225 b. Certified Industrial Hygienist (CIH) – An individual who is board certified by the American
226 Board of Industrial Hygiene and has met the minimum requirements for education,
227 experience, and through examination has demonstrated a minimum level of knowledge in
228 occupational health subject areas such as potential nanotechnology hazards.

- 230 c. Certified Hazardous Materials Manager (CHMM) – An individual who is board certified by
231 the Institute of Hazardous Materials Management and has met the professional challenge of
232 illustrating competency through education, experience, and examination.
233
- 234 d. Certified Safety Professional (CSP) – An individual who is board certified by the Board of
235 Certified Safety Professionals and has met the professional challenge of illustrating
236 competency through education, experience, and examination.
237
- 238 e. Dispersible Engineered Nanomaterials (DENMs) – Intentionally-produced materials with one
239 or more dimensions between approximately 1 nm and 100 nm that can be dispersed into (or
240 onto) liquid or solid compounds or aerosolized (suspended in a gas).
241
- 242 f. Engineered Nanomaterials (ENMs) – Intentionally-produced materials with one or more
243 dimensions between approximately 1 nm and 100 nm;
244
- 245 g. Engineered Nanoparticles (ENPs) – Intentionally-produced, dispersible particles with two or
246 three dimensions between approximately 1 nm and 100 nm;
247
- 248 h. High-Efficiency Particulate Air (HEPA) Filter – A filter that is at least 99.97% efficient in
249 removing particles 0.3 micrometers in diameter or greater passing through the filter.
250
- 251 i. HEPA vacuum – A vacuum which has been designed with a HEPA filter as the last filtration
252 stage and includes a description of what the term HEPA means. The HEPA vacuum must be
253 designed so that all the air drawn into the machine is expelled through the filter.
254
- 255 j. Shall/Should/May –
256
- 257 (1) Shall (Must or Will): Indicates that the performance of an item is mandatory.
258
- 259 (2) Should: Indicates that the performance of an item is not mandatory, but the full
260 implications of not performing that item must be understood and either justified or
261 carefully weighed before choosing a different course.
262
- 263 (3) May: Indicates that the performance of an item is at the discretion of the individual
264 responsible for the action.
265
- 266 k. Ultra-Low Particulate Air (ULPA) Filter – A filter that is at least 99.9995% efficient in
267 removing particles or particles of 0.12 micrometers in diameter or greater passing through the
268 filter.
269

270 1. Work Area – For the purposes of this suborder, a defined space in a workplace where
271 DENMs are produced or used to which there is a reasonable likelihood that workers present
272 in the space could be exposed.
273
274

275 **8. ACRONYMS**

- 276 a. CIH – Certified Industrial Hygienist
277
278 b. CHMM – Certified Hazardous Materials Manager
279
280 c. CSP – Certified Safety Professional
281
282 d. CSO – Chief Safety Officer
283
284 e. DENMs – Dispersible Engineered Nanomaterials
285
286 f. DHHS – Department of Health and Human Services
287
288 g. HEPA – High-Efficiency Particulate Air Filter
289
290 h. NIOSH – National Institute for Occupational Safety and Health
291
292 i. PPE – Personal Protective Equipment
293
294 j. OSHE – Office of Safety, Health and Environment
295
296 k. OU – Organizational Unit
297
298 l. ULPA – Ultra-Low Particulate Air Filter
299

300 301 **9. RESPONSIBILITIES**

- 302 a. The OUs are responsible for ensuring that the requirements in Section 6 are met.
303
304

305 **10. AUTHORITIES**

306 There are no authorities specific to this suborder alone.
307
308
309

310 **11. DIRECTIVE OWNER**

311 Chief Safety Officer

312

313

314 **12. APPENDICES**

315 a. Appendix A. Example Hazard Signage

316 b. Appendix B. Revision History


317

318

319

320
321

Appendix A. Example Hazard Signage

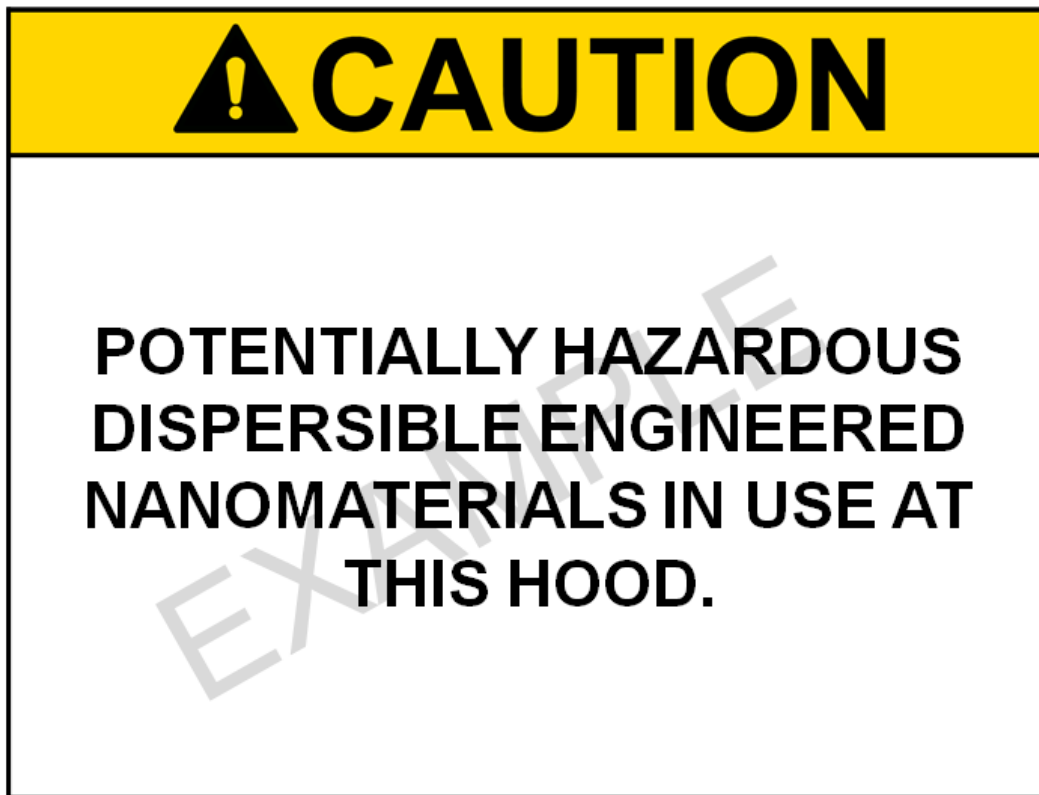

322
323
324
325

326

Appendix B. Revision History

327

Revision No.	Approval Date	Responsible Person	Brief Description of Change; Rationale
1	1/5/21	April Camenisch	Updated suborder links. Added Revision History appendix.

328