



COMMITTEE DRAFT OIML/2CD

Date: 14 September 2010

Reference number:  
OIML TC 8/SC 7/023a/2CD

Supersedes document:  
OIML TC 8/SC 7/004/1CD

OIML TC 8 / SC 7

Title: *Gas meters*

Secretariat:  
The Netherlands

Circulated to P- and O-members and  
liaison international bodies and external  
organisations for:

discussion at (date and place of  
meeting):

comments by:

vote (P-members only) and  
comments by: 15 December 2010

TITLE OF THE CD (English):

OIML R 137-1 and -2

**Gas meters**

**Part 1: Metrological and Technical Requirements**

**Part 2: Metrological controls and performance tests**

TITRE DU CD (French):

OIML R 137-1 et -2

**Compteurs de gaz**

**Partie 1: Exigences métrologiques et techniques,**

**Partie 2: Contrôles métrologiques et essais de performance**

Original version in: English

## Explanatory note to the 12 CD

(Temporary section to be removed after finalization of the Recommendation)

After OIML R 137-1 *Gas meters* was approved by CIML in 2006 and effectively published in 2007, and the responsibility for this Recommendation was transferred to TC8/SC7, the secretary started the work on drafting Part 2 *Metrological controls and performance tests*. During this work, it was identified that a few minor changes in Part 1 would be necessary, although there is no formal project for the revision of Part 1. Nevertheless, expecting that the current project for part 2 will also lead to a revised Part 1, the secretary investigated what further changes would be advisable. This led to the following proposed changes in Part 1 (2006):

- Modification of terminology as to comply with the new (2007) edition of the “VIM”.
- Removal of terminology not used in the document
- Separation in Parts 1 and 2 as to comply with the draft general format for OIML Recommendations (see Circular BIML 09 No. 273/RG/JFM dated 2009.05.29)

Note:

In part 1 only the requirements are listed, due to the fact this part will be used for legislation and therefore paragraph 5.13 is introduced.

Also the previous chapters 3 up to and including 6 are reshuffled to make the document in line with the general OIML format.

- **Extending of requirements for the** ~~Introducing~~ a mains voltage ~~with~~ **and further environmental requirements** in clause 5.1, rated operating conditions
- ~~Limiting the reproducibility requirement prescribed only to gas meters which are sensitive to hysteresis (meters with internal moving parts or meters based on the Vortex principle), and introducing a repeatability requirement for gas meters which are not sensitive to hysteresis (meters without internal moving parts) (- & /)~~
- ~~Limiting the applicability of temperature test with gas temperature unequal to ambient temperature to mechanical gas meters with a built-in temperature conversion device only (- and -)~~  
*Furthermore, in 12.4.8 the first test method with flow tests is prescribed for ~~domestic~~ residential meters.*
- *The requirements for the working pressure ~~(-)~~ are stated for the whole pressure range. The specific requirement that the maximum difference between the error curves, obtained at different pressures, is limited to 0,5 times the maximum permissible error is removed.*
- *The damp heat, steady state and damp heat cyclic test are performed at the upper temperature (Table 4).*
- Better separation of the test ‘Orientation and flow direction’ into tests for ‘Orientation’ and ‘flow direction’ respectively (5.13.1 and 5.13.2).
- Amending annex B regarding the requirement for flow disturbances. The requirement is that the fault has to be < one third MPE. However, in Annex B still 0,33% was mentioned, which was not correct for class 0.5 or 1.5. Meters. This sentence in Annex B is removed.
- Updating Annex B requirements for flow disturbances.
- Simplifying the overview of documentation for type evaluation (12.2)
- Updating of the bibliography
- *AC mains voltage dips and, short interruptions and voltage variations is adapted to D11 (2004)*
- *The level of the surge test as specified in D11 is brought in line with R117-1.*

- *The DC ripple test as specified in D11(2004) is added (5.13.7), with severity level in line with R117-1*
- *DC mains voltage dips and short interruptions and variations test as specified in D11(2004) are added (5.13.7), in line with R117-1*
- *The test methods for some EMC tests, like ESD and surges are changed such, that during those EMC phenomena the meter under test has to fulfil the stated requirements, instead of afterwards. This is in line with the OIML R117-1.*
- Adding of Chapter 9
- Removal of the original Table 4, while moving the original Table 6 to part 1 (5.13.7).
- Extending tests for the influence of software functions (like communication possibilities) on the meter accuracy ⊕.
- *The scope of the document is changed such, that also **domestic residential** meters with internal temperature compensation are also covered.*

With the above mentioned modifications a 1CD was produced which was sent for comments in Oktober 2009.

Using the compiled comments on the 1 CD a preliminary 2 CD was set up and on a number of comments a preliminary response by the secretary was given. An SC meeting was organised to discuss the controversy comments

The present 2CD has been discussed as preliminary 2CD in this TC 8/SC 7 meeting on 1 and 2 July 2010 in Delft and on basis of the outcome of the discussions a number of modifications have been implemented.

**Additional work suggested:**

- Further aligning the document with the draft general OIML format
- Further aligning with latest version OIML D11

---

## Contents

<a href="#">Foreword</a> .....	3
1 Introduction .....	7
2 Scope .....	7
3 Terminology .....	7
3.1 Gas meter and its constituents .....	7
3.2 Metrological characteristics.....	8
3.3 Operating conditions .....	10
3.4 Test conditions .....	11
3.5 Electronic equipment .....	12
4 Units of measurement.....	13
4.1 Measurement units .....	13
5 Metrological requirements.....	13
5.1 Rated operating conditions .....	13
5.2 Values of $Q_{\max}$ , $Q_t$ and $Q_{\min}$ .....	14
5.3 Accuracy classes and maximum permissible errors.....	14
5.4 Weighted mean error (WME).....	15
5.5 Repair and damage of sealings.....	15
5.6 Reproducibility .....	15
5.7 Repeatability.....	15
5.8 Working pressure.....	15
5.9 Temperature .....	15
5.10 Durability.....	16
5.11 Overload flow .....	16
5.12 Vibrations and shocks .....	16
5.13 Metrological requirements specific to certain types of gas meters.....	16
6 Technical requirements.....	20
6.1 Construction .....	20
6.2 Flow Direction .....	21
6.3 Indicating device.....	21
6.4 Test element .....	22
6.5 Ancillary devices .....	23
6.6 Power sources .....	24
6.7 Checks, limits and alarms for electronic gas meters .....	25
6.8 Software.....	25
7 Inscriptions .....	26
7.1 Markings and inscriptions.....	26
8 Operating instructions.....	28
8.1 Instruction manual .....	28
8.2 Installation conditions .....	28
9 Sealing .....	29
9.1 Verification marks and protection devices.....	29
10 Suitability for testing .....	31
10.1 Pressure tappings .....	31

---

Annex I : Requirements for software controlled Gas Meters .....	32
Part 2 Metrological controls and performance tests .....	36
11 Metrological controls.....	36
11.1 General procedures.....	36
12 Type evaluation .....	38
12.1 General.....	38
12.2 Documentation.....	38
12.3 Type evaluation procedures.....	38
12.4 Type evaluation tests.....	41
12.5 Type approval certificate .....	45
12.6 Provisions for performing initial verification.....	47
13 Initial verification and subsequent verification .....	48
13.1 General.....	48
13.2 Additional requirements for statistical verifications.....	49
13.3 Additional requirements for in-service inspections.....	49
Annex A: Environmental tests for electronic instruments or devices.....	50
Annex B: Flow disturbance tests .....	59
Annex C: Overview of requirements and applicable tests for different metering principles.....	61
Annex D: Type evaluation of a family of gasmeters .....	62
Annex E: Bibliography .....	64

## Foreword

The International Organization of Legal Metrology (OIML) is a worldwide, intergovernmental organization whose primary aim is to harmonize the regulations and metrological controls applied by the national metrological services, or related organizations, of its Member States. The main categories of OIML publications are:

- **International Recommendations (OIML R)**, which are model regulations that establish the metrological characteristics required of certain measuring instruments and which specify methods and equipment for checking their conformity. OIML Member States shall implement these Recommendations to the greatest possible extent;
- **International Documents (OIML D)**, which are informative in nature and which are intended to harmonize and improve work in the field of legal metrology;
- **International Guides (OIML G)**, which are also informative in nature and which are intended to give guidelines for the application of certain requirements to legal metrology; and
- **International Basic Publications (OIML B)**, which define the operating rules of the various OIML structures and systems.

OIML Draft Recommendations, Documents and Guides are developed by Technical Committees or Subcommittees which comprise representatives from the Member States. Certain international and regional institutions also participate on a consultation basis. Cooperative agreements have been established between the OIML and certain institutions, such as ISO and the IEC, with the objective of avoiding contradictory requirements. Consequently, manufacturers and users of measuring instruments, test laboratories, etc. may simultaneously apply OIML publications and those of other institutions.

International Recommendations, Documents, Guides and Basic Publications are published in English (E) and translated into French (F) and are subject to periodic revision.

Additionally, the OIML publishes or participates in the publication of **Vocabularies (OIML V)** and periodically commissions legal metrology experts to write **Expert Reports (OIML E)**. Expert Reports are intended to provide information and advice, and are written solely from the viewpoint of their author, without the involvement of a Technical Committee or Subcommittee, nor that of the CIML. Thus, they do not necessarily represent the views of the OIML.

This publication - reference OIML R 137-1 & -2, Edition 200X - was developed by Technical Subcommittee TC 8/SC 7 *Gas meters*. It was approved for final publication by the International Committee of Legal Metrology in 200x and will be submitted to the International Conference of Legal Metrology in 200x for formal sanction. It supersedes ~~the previous editions of~~ OIML R 137-1 (2006).

OIML Publications may be downloaded from the OIML web site in the form of PDF files. Additional information on OIML Publications may be obtained from the Organization's headquarters:

Bureau International de Métrologie Légale  
11, rue Turgot - 75009 Paris - France  
Telephone: 33 (0)1 48 78 12 82  
Fax: 33 (0)1 42 82 17 27  
E-mail: [biml@oiml.org](mailto:biml@oiml.org)  
Internet: [www.oiml.org](http://www.oiml.org)

# Part 1: Metrological and technical requirements

## 1 Introduction

## 2 Scope

This Recommendation applies to gas meters based on any measurement technology or principle, that is used to meter-measure the quantity of gas in volume, mass or energy units that has passed through the meter at operating conditions. ~~It~~ The quantity of gas can be expressed in units of volume or mass.

This Recommendation applies also to gas meters intended to measure quantities of gaseous fuels or other gases, ~~except~~. The Recommendation does not cover meters used for gases in the liquefied state ~~and~~, multi-phase, steam and compressed natural gas (CNG) used in CNG dispensers.

~~Dispensers for compressed natural gas (CNG dispensers) are also excluded from the scope of this Recommendation.~~

~~This Recommendation also applies to~~

Built-in correction devices, ~~and~~ and devices for internal temperature compensation are included in this scope as well as any other (electronic) devices that ~~can~~may be attached to the gas meter. ~~This including devices for internal temperature compensation.~~

However, provisions for conversion devices, either as part of the gas meter or as a separate instrument, or provisions for devices for the determination of the superior calorific value and gas metering systems consisting of several components, are ~~defined~~layed down in the OIML Recommendation R140 *Measuring systems for gaseous fuel* [7].

## 3 Terminology

The terminology used in this Recommendation conforms to the International Vocabulary of Basic and General Terms in Metrology (VIM ~~Edition 2007~~) [1] and the International Vocabulary of Terms in Legal Metrology (VIML ~~Edition 2000~~) [2]. In addition and for the purposes of this Recommendation, the following definitions apply.

### 3.1 Gas meter and its constituents

#### 3.1.1 gas meter

instrument intended to measure, memorize and display the quantity of gas passing the flow sensor.

#### 3.1.2 measurand (VIM 2.3)

quantity intended to be measured.

#### 3.1.3 sensor (VIM 3.8)

element of a measuring system that is directly affected by a phenomenon, body, or substance carrying a quantity to be measured.

#### 3.1.4 measuring transducer (VIM 3.7)

device, used in measurement, that provides an output quantity having a specified relation to the input quantity.

#### 3.1.5 calculator

---

part of the gas meter which receives the output signals from the measuring transducer(s) and, possibly, associated measuring instruments, transforms them and, if appropriate, stores the results in memory until they are used. In addition, the calculator may be capable of communicating both ways with ancillary devices.

### 3.1.6 indicating or displaying device

part of the gas meter which displays the measurement results, either continuously or on demand.

*Note:* A printing device, which provides an indication at the end of the measurement, is not an indicating device.

### 3.1.7 correction device

device intended for correction of known errors as a function of e.g. flowrate, Reynolds number (curve linearization), or density, pressure and/or temperature.

### 3.1.8 ancillary device

device intended to perform a particular function, directly involved in elaborating, transmitting or displaying measurement results.

The main ancillary devices are:

- a) repeating indicating device;
- b) printing device;
- c) memory device; and
- d) communication device.

*Note 1:* An ancillary device is not necessarily subject to metrological control.

*Note 2:* An ancillary device may be integrated in the gas meter.

### 3.1.9 associated measuring instrument

instrument connected to the calculator or the correction device for measuring certain gas properties, for the purpose of making a correction.

### 3.1.10 equipment under test (EUT)

(part of the) gas meter and/or associated devices which is exposed to one of the tests.

### 3.1.11 family of gas meters

group of gas meters of different sizes and/or different flowrates, in which all the meters shall have the following characteristics:

- the same manufacturer;
- geometric similarity of the measuring part;
- the same metering principle;
- roughly the same ratios  $Q_{\max}/Q_{\min}$  and  $Q_{\max}/Q_t$ ;
- the same accuracy class;
- the same electronic device (see 3.5.2) for each meter size and using the same metrological software routines (if applicable) for those components that are critical to the performance of the meter;
- a similar standard of design and component assembly; and
- the same materials for those components that are critical to the performance of the meter.

## 3.2 Metrological characteristics

### 3.2.1 quantity of gas

total quantity of gas obtained by integrating the flow over time, expressed as volume  $V$ , mass  $m$  or energy  $E$  passed through the gas meter, disregarding the time taken. ~~This is~~Being the measurand concerned (see 3.1.22.1.2).



## 3.2.2 indicated value (of a quantity)

Value  $Y_i$  of a quantity, as indicated by the meter.

## 3.2.3 cyclic volume of a gas meter (positive displacement gas meters only)

volume of gas corresponding to one full revolution of the moving part(s) inside the meter (working cycle).

## 3.2.4 error (VIM 2.16)

measured quantity value minus a reference quantity value

*Note: The presented VIM definition of (measurement) error is often interpreted as the definition for an absolute error. However when expressing a parameter in percentage or dB this definition could also be applied to a relative error. Since in all cases in this document the errors are expressed in relative values it is decided that a separate definition for a relative error is not needed.*

## 3.2.5 weighted mean error (WME)

3.2.6 the weighted mean error (WME) **within the scope of this recommendation** is ~~calculated~~ **defined** as follows:

$$WME = \frac{\sum_{i=1}^n k_i E_i}{\sum_{i=1}^n k_i} \quad \text{with} \quad k_i = \frac{Q_i}{Q_{\max}} \quad \text{for } Q_i \leq 0.7 Q_{\max}$$

$$k_i = 1.4 - \frac{Q_i}{Q_{\max}} \quad \text{for } 0.7 Q_{\max} < Q_i \leq Q_{\max}$$

where:

- ~~$Q_i/Q_{\max}$  is a~~  $k_i$  = weighting factor at the flowrate  $Q_i$ ;
- $E_i$  is = the error at the flowrate  $Q_i$ .

• ~~at  $Q_i > 0.9 Q_{\max}$  a weighting factor of 0.4 shall be used instead of 1.~~

## 3.2.7 intrinsic error (OIML D 11, 3.7)

error determined under reference conditions.

3.2.8 fault  $\Delta e$  (OIML D 11, 3.9)

difference between the error of indication and the intrinsic error of a measuring system or of its constituent elements.

*Note: In practice this is the difference between the error of the meter observed during or after a test, and the error of the meter prior to this test, performed under reference conditions.*

*Note: "measuring system" is to be interpreted as a "gas meter" within the scope of this Recommendation.*

## 3.2.9 maximum permissible error (MPE) (VIM 4.26)

extreme value of measurement error, with respect to a known reference quantity value, permitted by specifications or regulations for a given measurement, measuring instrument, or measuring system.

## 3.2.10 accuracy class (VIM 4.25)

class of measuring instruments or measuring systems that meet stated metrological requirements that are intended to keep measurement errors or instrumental uncertainties within specified limits under specified operating conditions .

## 3.2.11 durability (OIML D 11, 3.17)

ability of a measuring instrument to maintain its performance characteristics over a period of use.

**3.2.12 measurement precision (VIM 2.15)**

closeness of agreement between indications or measured quantity values obtained by replicate measurements on the same or similar objects under specified conditions

**3.2.13 repeatability (VIM 2.21)**

measurement precision under a set of repeatability conditions of measurement

**3.2.14 repeatability of error**

repeatability under reference conditions and not changing the flowrate between the measurements

**3.2.15 reproduceability (VIM 2.25)**

measurement precision under reproduceability condition of measurement

**3.2.16 reproducibility of error**

reproduceability under reference conditions and changing the flowrate between the measurements

~~3.2.12~~ **3.2.17 operating conditions**

conditions of the gas (temperature, pressure and gas composition) at which the quantity of gas is measured.

~~3.2.13~~ **3.2.18 rated operating conditions**

conditions of use giving the range of values of the measurand and the influence quantities, for which the errors of the gas meter are required to be within the limits of the maximum permissible error.

~~3.2.14~~ **3.2.19 reference conditions**

set of reference values, or reference ranges of influence quantities, prescribed for testing the performance of a gas meter, or for the intercomparison of the results of measurements.

~~3.2.15~~ **3.2.20 base conditions**

conditions to which the measured volume of gas is converted (examples: base temperature and base pressure).

*Note: Operating and base conditions relate to the volume of gas to be measured or indicated only and should not be confused with "rated operating conditions" and "reference conditions" (VIM 4.9 and 4.11) which refer to influence quantities.*

~~3.2.16~~ **3.2.21 test element (of an indicating device)**

device to enable precise reading of the measured gas quantity.

~~3.2.17~~ **3.2.22 resolution (of a displaying device) (VIM 4.15)**

smallest difference between displayed indications that can be meaningfully distinguished.

*Note: For a digital device, this is the change in the indication when the least significant digit changes by one step. For an analogue device, this is half the difference between subsequent scale marks.*

~~3.2.18~~ **3.2.23 (instrumental) drift (VIM 4.21)**

continuous or incremental change over time in indication, due to changes in metrological properties of a measuring instrument.

**3.3 Operating conditions**

*Note: For the definition of operating conditions, see 3.2.17.*

**3.3.1 flowrate,  $Q$** 

quotient of the actual quantity of gas passing through the gas meter and the time taken for this quantity to pass through the gas meter.

**3.3.2 maximum flowrate,  $Q_{\max}$** 

highest flowrate at which a gas meter is required to operate within the limits of its maximum permissible error, whilst operated within its rated operating conditions.

### 3.3.3 minimum flowrate, $Q_{\min}$

lowest flowrate at which a gas meter is required to operate within the limits of its maximum permissible error, whilst operated within its rated operating conditions.

### 3.3.4 transitional flowrate, $Q_t$

flowrate which occurs between the maximum flowrate  $Q_{\max}$  and the minimum flowrate  $Q_{\min}$  that divides the flowrate range into two zones, the “upper zone” and the “lower zone”, each characterized by its own maximum permissible error.

### 3.3.5 working temperature, $t_w$

temperature of the gas to be measured at the gas meter.

### 3.3.6 minimum and maximum working temperatures, $t_{\min}$ and $t_{\max}$

minimum and maximum gas temperature that a gas meter can withstand, within its rated operating conditions, without unacceptable deterioration of its metrological performance.

### 3.3.7 median temperature specified, $t_{sp}$

median temperature for gas meters with built-in conversion devices as specified by the manufacturer.

### ~~3.3.7~~3.3.8 working pressure, $p_w$

~~Gauge~~ pressure of the gas to be measured at the gas meter. ~~The gauge pressure is the difference between the absolute pressure of the gas and the atmospheric pressure.~~

### ~~3.3.8~~3.3.9 minimum and maximum working pressure, $p_{\min}$ and $p_{\max}$

~~minimum and maximum internal-gauge~~ pressure that a gas meter can withstand, within its rated operating conditions, without deterioration of its metrological performance.

### ~~3.3.9~~3.3.10 static pressure loss or pressure differential, $\Delta p$

mean difference between the pressures at the inlet and outlet of the gas meter while the gas is flowing.

### ~~3.3.10~~3.3.11 working density, $\rho_w$

density of the gas flowing through the gas meter, corresponding to  $p_w$  and  $t_w$

## 3.4 Test conditions

### 3.4.1 influence quantity (VIM 2.52)

quantity that, in a direct measurement, does not affect the quantity that is actually measured, but affects the relation between the indication and the measurement result.

### 3.4.2 disturbance (OIML D 11, 3.13.2)

influence quantity having a value within the limits specified in this Recommendation, but outside the specified rated operating conditions of the gas meter.

*Note: An influence quantity is a disturbance if for that influence quantity the rated operating conditions are not specified.*

### 3.4.3 overload conditions

extreme conditions, including flowrate, temperature, pressure, humidity and electromagnetic interference that a gas meter is required to withstand without damage.

### 3.4.4 test

series of operations intended to verify the compliance of the equipment under test (EUT) with certain requirements.

### 3.4.5 test procedure

detailed description of the test operations.

### 3.4.6 test program

Description of a series of tests for a certain type of equipment.

#### 3.4.7 performance test

test intended to verify whether the equipment under test (EUT) is capable of accomplishing its intended functions.

### 3.5 Electronic equipment

#### 3.5.1 electronic gas meter

gas meter equipped with electronic devices.

*Note:* For the purposes of this Recommendation ~~auxiliary~~ *ancillary* equipment, as far as it is subject to metrological control, is considered part of the gas meter, unless the ~~auxiliary~~ *ancillary* equipment is approved and verified separately.

#### 3.5.2 electronic device (D 11, 3.2)

device employing electronic sub-assemblies and performing a specific function. Electronic devices are usually manufactured as separate units and are capable of being tested independently.

#### 3.5.3 electronic component

smallest physical entity in an electronic ~~system~~ *device* used to affect ~~the~~ electrons *and/or* their associated fields in *their movement through a desired manner within semi-conductors, gases* ~~medium~~ or ~~in a~~ vacuum.

## 4 Units of measurement

### 4.1 Measurement units

All quantities shall be expressed in SI units [3] or as other legal units of measurement [4], unless a country's legal units are different. In the next section the unit corresponding to the quantity indicated is expressed by <unit>.

## 5 Metrological requirements

### 5.1 Rated operating conditions

Rated operating conditions for a gas meter shall be as follows:			
a)	Ambient temperature (Temperature range chosen shall at least cover 50 K)	low	- 40 °C, - 25 °C, - 10 °C and + 5 °C <sup>(1)</sup>
		high	+ 30 °C, + 40 °C, + 55 °C and + 70 °C <sup>(1)</sup>
b)	Ambient relative humidity	As specified by the manufacturer; at least up to 93 %	
c)	Atmospheric pressure	As specified by the manufacturer; at least covering 86 kPa - 106 kPa	
d)	Vibration less than	10 Hz - 150 Hz, 1.6 ms <sup>-2</sup> , 0.05 m <sup>2</sup> s <sup>-3</sup> , -3dB/octave	
e)	DC mains voltage <sup>(3)</sup>	As specified by the manufacturer	
f)	AC mains voltage <sup>(3)</sup>	$U_{nom} - 15\%$ to $U_{nom} + 10\%$	
g)	AC mains frequency <sup>(3)</sup>	$f_{nom} - 2\%$ to $f_{nom} + 2\%$	
h)	Flowrate range	$Q_{min}$ to $Q_{max}$ inclusive	
i)	Type of gases	The family of natural gases, industrial gases, or supercritical gases; to be specified by the manufacturer <sup>(2)</sup> .	
j)	Working pressure range:	$p_{min}$ to $p_{max}$ inclusive	
<sup>(1)</sup> These values are to be decided by the national authority, as it depends on the climatic conditions and the expected conditions of application (indoors, outdoors, etc.) that are different in different countries.			
<sup>(2)</sup> Supercritical refers to the situation where there is no distinction between the gaseous and liquefied state of the fluid			
<sup>(3)</sup> If applicable			

The rated operating conditions for a gas meter shall be as follows:

Flowrate range:  $Q_{min}$  to  $Q_{max}$  inclusive

Ambient temperature range: lower temperature to be chosen from - 40 °C, - 25 °C, - 10 °C and + 5 °C  
upper temperature to be chosen from + 30 °C, + 40 °C, + 55 °C and + 70 °C

Ambient humidity range:  $\leq 93\%$

Working pressure range:  $p_{min}$  to  $p_{max}$  inclusive

Gases: the family of natural gases, industrial gases, or supercritical gases; to be specified by the manufacturer <sup>(Note 1)</sup>

DC mains or battery voltage: <sup>(Note 2)</sup> as specified by the manufacturer

AC mains voltage: <sup>(Note 2)</sup>  $U_{nom} - 15\%$  to  $U_{nom} + 10\%$

*Note 1: ~~Supercritical refers to the situation where there is no distinction between the gaseous and liquefied state of the fluid.~~*

*Note 2: ~~Whatever is applicable.~~*

## 5.2 Values of $Q_{\max}$ , $Q_t$ and $Q_{\min}$

The flowrate characteristics of a gas meter shall be defined by the values of  $Q_{\max}$ ,  $Q_t$  and  $Q_{\min}$  ~~as stated in~~. **Their ratios and relations shall be within the ranges as stated in Table 1.**

Table 1 Flowrate characteristics

$Q_{\max} / Q_{\min}$	$Q_{\max} / Q_t$
$\geq 50$	$\geq 10$
$\geq 5$ and $< 50$	$\geq 5$

## 5.3 Accuracy classes and maximum permissible errors

### 5.3.1 General

Gas meters shall be designed and manufactured such that their errors do not exceed the limits of the applicable maximum permissible error under rated operating conditions, listed in 5.3.3.

### 5.3.2 Correction for known errors

Gas meters may be equipped with a correction device, which can be used to bring errors as close as possible to zero. ~~A correction device can be used to improve the Accuracy Class specification.~~ The correction device shall not be used for the correction of a pre-estimated drift.

### 5.3.3 Accuracy Classes and maximum permissible errors (MPE)

Gas meters shall be classified ~~into~~ **according their accuracy in** the ~~Accuracy Classes given~~ **classes as presented in** Table 2. The errors shall ~~bestay~~ **stay** within the applicable **MPE** values given in Table 2.

Table 2 Maximum permissible errors of gas meters

Flowrate $Q$	During type evaluation and initial verification Accuracy Class			During subsequent verification and In-service * Accuracy Class		
	0.5	1	1.5	0.5	1	1.5
$Q_{\min} \leq Q < Q_t$	$\pm 1 \%$	$\pm 2 \%$	$\pm 3 \%$	$\pm 2 \%$	$\pm 4 \%$	$\pm 6 \%$
$Q_t \leq Q \leq Q_{\max}$	$\pm 0.5 \%$	$\pm 1 \%$	$\pm 1.5 \%$	$\pm 1 \%$	$\pm 2 \%$	$\pm 3 \%$

\* Note: National Authorities may decide ~~whether they will to~~ **implement in-service** maximum permissible errors **for subsequent or not in-service verification.**

### 5.3.4 **Mechanical** Gas meter with a built-in **mechanical temperature** conversion device

For a **mechanical** gas meter with a built-in **mechanical temperature** conversion device, ~~having only one indicating device (???)~~ displaying the volume at base conditions **only**, the maximum permissible errors as indicated in Table 2 are increased by 0.5 % in a range of 30 °C extending symmetrically around the temperature

$t_{sp}$  specified by the manufacturer. Outside this range an additional increase of 0.5 % is permitted in each interval of 10 °C. Compliance with these requirements shall be verified at temperatures deviating by not more than 2 °C from the upper and lower limits of the specified intervals.

*Note 1: The conversion may be based on temperature and/or pressure measurements.*

*Note 2: Gas meters indicating both actual volume and volume at base conditions are considered a gas metering system for which OIML R140 is also applicable.*

#### 5.4 Weighted mean error (WME)

The weighted mean error (WME) shall be within the values given in Table 3.

Table 3 Maximum permissible weighted mean error

Flowrate $Q$	During type evaluation and initial verification Accuracy Class			During subsequent verification and in-service Accuracy Class		
	0.5	1	1.5	0.5	1	1.5
WME	± 0.2 %	± 0.4 %	± 0.6 %	--	--	--

#### 5.5 Repair and damage of seals/sealings

After repair of components of the gas meter which affect the metrological behaviour or after damage to the seals, the maximum permissible error shall comply with the errors on initial verification as stated in Table 2, as well as the maximum permissible weighted mean error as stated in Table 3.

#### 5.6 Reproducibility

Assuming that For flowrates equal to or greater than  $Q_i$  the results from reproducibility measurements reproduceability of a gas meter will show normal distribution, error at the associated standard deviation, which can be estimated on basis of calculation of the experimental standard deviation, specific flowrate shall be less than or equal to 0.15 times one third of the maximum permissible error, for flowrates equal to or greater than  $Q_i$ .

#### 5.7 Repeatability

The difference between the maximum and minimum repeatability of error of three consecutive measurements of gas meters, at reference conditions, during repeated measurements without changing the the specific flowrate, shall be less than or equal to one third of the maximum permissible error.

#### 5.8 Working pressure

The requirements as mentioned in 5.3 shall be fulfilled over the whole working pressure range.

The maximum difference between the error curves, obtained at different pressures, is limited to 0.5 times the maximum permissible error.

#### 5.9 Temperature

The requirements as mentioned in 5.3 shall be fulfilled over the whole temperature range, where the ambient temperature is equal to equals the gas temperature. In case the ambient temperature is unequal to the gas temperature within 5 °C.

For gas meters indicating the volume at base conditions only the double maximum permissible error limits apply when the ambient temperature differs 20 °C or more from the gas temperature.

### 5.10 Durability

Gas meters with internal moving parts shall meet the following requirements after being exposed to the flow with a quantity that is equivalent to 2000 hours flow at  $Q_{\max}$  and at a flowrate between  $0,8 Q_{\max}$  and  $Q_{\max}$ :

- double the maximum permissible errors as mentioned in 5.3 and
- for flowrates from  $Q_t$  up to  $Q_{\max}$  a fault of less than or equal to
  - 1.0 times the maximum permissible error for class 1.5 or
  - 0.5 times the maximum permissible error for other classes

### 5.11 Overload flow

Gas meters with internal moving parts shall meet the following requirements, after being exposed to an overload of  $1.2 Q_{\max}$  for 1 hour:

- the maximum permissible errors as mentioned in 5.3 and
- a fault of less than or equal to one third of the maximum permissible error

### 5.12 Vibrations and shocks

Gas meters shall withstand vibrations and shocks with the following specifications:

#### 5.12.1 vibrations :

total frequency range: 10 Hz - 150 Hz

total RMS level:  $7 \text{ m}\cdot\text{s}^{-2}$

ASD level 10-20 Hz:  $1 \text{ m}^2\text{s}^{-3}$

ASD level 20-150 Hz: -3dB/octave

#### 5.12.2 shocks:

height of fall: 50 mm

The fault after the application of vibrations and shocks shall be less than or equal to 0.5 times the maximum permissible error.

### 5.13 Metrological requirements specific to certain types of gas meters

#### 5.13.1 Orientation

If the meter is specified by the manufacturer to of the meter specifies the meter will only operate correctly while installed in certain orientations and marked as such, the metrological requirements as mentioned in 5.3 and 5.4 shall be fulfilled for these orientations only.

In the absence of such marks the meter shall fulfil these requirements for all orientations.

#### 5.13.2 Flow direction

If the meter is marked as able to measure the flow in both directions, the metrological requirements as mentioned in 5.3 and 5.4 apply shall be fulfilled for each direction separately.

#### 5.13.3 Flow disturbance

For types of gas meters of which the accuracy is affected by flow disturbances the shift of the error curve due to these (mild or severe flow) disturbances shall not exceed one third of the maximum permissible error.



#### 5.13.4 Drive shaft (torque)

For types of gas meters provided with one or more drive shafts, the any fault at  $Q_{min}$  due to which results from the application of the maximum specified torque shall not be more than one third of the maximum permissible error.

#### 5.13.5 Different gases

The types of gas meters which are intended to be used for different gases shall comply with the metrological requirements as mentioned in 5.3 over the whole range of gases for which they are specified by the manufacturer.

#### 5.13.6 Interchangeable components

For types of gas meters of which some components are meant to be interchangeable for operational purposes (e.g. ultrasonic transducers or meter cartridges), the fault due to the interchange of such a component, shall not be more than one third of the maximum permissible error, while the error shall in no case exceed the maximum permissible error for that range.

#### 5.13.7 Electronics

If a gas meter includes electronic components, the requirements as presented in Table 4 apply.

Table 4 Requirements for ~~gasmeters~~gas meters containing electronic components**< Lay out still to be brought in line with the general OIML format >**

No.	Test	Levels	I/D	Requirement
a	Dry heat	upper temperature specified	I	5.3
b	Cold	lower temperature specified	I	5.3
c	Damp heat, steady state (non-condensing)	upper temperature specified, 93% relative humidity	I	5.3
d	Damp heat, cyclic (condensing)	upper temperature, specified 93% relative humidity	D	$\Delta e \leq 0.5$ MPE after
e	Vibration (random)	total frequency range: 10 - 150 Hz total RMS level: $7 \text{ m.s}^{-2}$ ASD level 10-20 Hz: $1 \text{ m}^2.\text{s}^{-3}$ ASD level 20-150 Hz: -3dB/octave	D	$\Delta e \leq 0.5$ MPE after
f	Mechanical shock	50 mm	D	$\Delta e \leq 0.5$ MPE after
g	Radiated, radio-frequency, electromagnetic fields	up to 2 GHz, 10 V/m	I	5.3
h	Conducted radio-frequency fields	up to 80 MHz, 10 V (e.m.f.)	I	5.3
i	Electrostatic discharge	6 kV contact discharge 8 kV air discharge	D	$\Delta e \leq 0.5$ MPE during
j	Bursts (transients) on signal, data and control lines	Amplitude 1 kV Repetition rate 5 kHz	D	$\Delta e \leq 0.5$ MPE during
k	Surges on signal, data and control lines	unsymmetrical lines: line to line 0,5 kV line to ground 1,0 kV symmetrical lines: line to line NA line to ground 1,0 kV shielded I/O and communication lines: line to line NA line to ground 0,5 kV	D	$\Delta e \leq 0.5$ MPE during
l	DC mains voltage variation <sup>(1)</sup>	as specified by the manufacturer	I	5.3
m	AC mains voltage variation <sup>(1)</sup>	85 % & 110 % of the rated voltage	I	5.3
n	AC mains voltage dips and short interruptions <sup>(1)</sup>	0.5 cycles      0 % 1 cycle          0 % 10/12 <sup>(2)</sup> cycles    40 % 25/30 <sup>(2)</sup> cycles    70 % 250/300 <sup>(2)</sup> cycles   80 %	D	$\Delta e \leq 0.5$ MPE during

o	DC mains voltage dips and short interruptions <sup>(1)</sup>	40 % & 70 % of the rated voltage during 0,1 s and 0 % of rated voltage during 0.01 s	D	$\Delta e \leq 0.5$ MPE during
p	Bursts (transients) on AC and DC mains	Amplitude 2 kV Repetition rate 5 kHz	D	$\Delta e \leq 0.5$ MPE during
q	Surges on AC and DC mains	line to line 1.0 kV line to ground 2.0 kV	D	$\Delta e \leq 0.5$ MPE during
r	Low voltage of internal battery <sup>(1)</sup>	as specified by the manufacturer	I	5.3
s	Ripple on DC mains power <sup>(1)</sup>	2 % of nominal DC voltage	D	$\Delta e \leq 0.5$ MPE during
<sup>(1)</sup> If applicable				
<sup>(2)</sup> For 50 Hz/ 60 Hz respectively				

Note: The **letter character I** refers to an influence test; **D** refers to a disturbance test.

#### 1.1.1 Software

##### 5.13.8 Influences from accessories

Gas meters provided with **software accessories** shall be designed such that all functions of the **software** (**like accessories** ( e.g. communication possibilities) do not affect the metrological behaviour.

**<To be brought in line with D31>**

## 6 Technical requirements

### 6.1 Construction

#### 6.1.1 Materials

A gas meter shall be made of such materials and be so constructed to withstand the physical, chemical and thermal conditions to which it is likely to be subjected and to fulfil correctly its intended purposes throughout its life.

#### 6.1.2 Soundness of cases

The case of a gas meter shall be gas-tight up to the maximum working pressure of the gas meter. If a meter is to be installed in the open air it shall be impermeable to run-off water.

#### 6.1.3 Condensation/climate provisions

The manufacturer may incorporate devices for the reduction of condensation, where condensation may adversely affect the performance of the device.

#### 6.1.4 Protection against external interference

A gas meter shall be constructed and installed in such a way that mechanical interference capable of affecting its accuracy is either prevented, or results in permanently visible damage to the gas meter or to the verification marks or protection marks.

#### 6.1.5 Indicating device

The indicating device can be connected to the meter body physically or remotely. In the latter case the data to be displayed shall be stored in the gas meter.

*Note: National or regional requirements may contain provisions to guarantee access to the data stored in the meter for customers and consumers.*

#### 6.1.6 Safety device

The gas meter may be equipped with a safety device that shuts off the gas flow in the event of calamities, such as an earthquake or a fire. A safety device may be connected to the gas meter, provided that it does not influence the metrological integrity of the meter.

*Note:—A mechanical gas meter equipped with an earthquake sensor plus an electrical powered valve is not considered to be an electronic gas meter.*

#### 6.1.7 Connections between electronic parts

Connections between electronic parts shall be reliable and durable.

#### 6.1.8 Components

Components of the meter may only be exchanged without subsequent verification if the type evaluation establishes that the metrological properties and especially the accuracy of the meter are not influenced by the exchange of the components concerned. Such components shall be identified at least by their own type indication.

*Note: National bodies may require components to be marked with the model(s) of the meter(s) to which they may be attached and may require such exchange to be carried out by authorized persons.*

#### 6.1.9 Zero flow

The gas meter totalization shall not change when the flowrate is zero, while the installation conditions are free from flow pulsations and vibrations.

*Note: This requirement refers to stationary operating conditions. This condition does not refer to the response of the gas meter to changed flowrates.*

## 6.2 Flow Direction

### 6.2.1 Direction of the gas flow

On a gas meter where the indicating device registers positively for only one direction of the gas flow, this direction shall be indicated by a method which is clearly understood, e.g. an arrow. This indication is not required if the direction of the gas flow is determined by the construction.

### 6.2.2 Plus and minus sign

The manufacturer shall specify whether or not the gas meter is designed to measure bi-directional flow. In the case of bi-directional flow a double-headed arrow with a plus and minus sign shall be used to indicate which flow direction is regarded as positive and negative respectively.

### 6.2.3 Recording of bi-directional flow

If a meter is designed for bi-directional use, the quantity of gas passed during reverse flow shall either be subtracted from the indicated quantity or be recorded separately. The maximum permissible error shall be met for both forward and reverse flow.

### 6.2.4 Reverse flow

If a meter is not designed to measure reverse flow, the meter shall either prevent reverse flow, or it shall withstand incidental or accidental reverse flow without deterioration or change in its metrological properties **concerning forward flow measurements**.

### 6.2.5 Indicating device

A gas meter may be provided with a device to prevent the indicating device from functioning whenever gas is flowing in an unauthorized direction.

## ~~1.2 Pressure tapplings~~

### ~~1.2.1 General~~

~~If a gas meter is designed to operate above an absolute pressure of 0.15 MPa, the manufacturer shall either equip the meter with pressure tapplings, or specify the position of pressure tapplings in the installation pipe work. In any case those tapplings shall be self-draining to avoid condensation.~~

~~Note: This requirement is not mandatory for coriolis meters for direct mass measurement.~~

### ~~1.2.2 Bore~~

~~The bore of the pressure tapplings shall be large enough to allow correct pressure measurements.~~

### ~~1.2.3 Closure~~

~~Pressure tapplings shall be provided with a means of closure to make them gas tight.~~

### ~~1.2.4 Markings~~

~~The pressure tapping on the gas meter for measuring the working pressure ( ) shall be clearly and indelibly marked "p<sub>m</sub>" (i.e. the pressure measurement point) or "p<sub>r</sub>" (i.e. the pressure reference point) and other pressure tapplings "p".~~

## 6.3 Indicating device

### 6.3.1 General provisions

The indicating device associated with the gas meter shall indicate the quantity of gas measured (in volume, or mass or energy) in the corresponding units. The reading shall be clear and unambiguous.

The indicating device may be:

- a) a mechanical indicating device as described in 6.3.4;
- b) an electromechanical or electronic indicating device as described in 6.3.5;

c) a combination of a) and b).

Indicating devices shall be non-resettable and shall be non-volatile (i.e. they shall be able to show the last stored indication after the device has recovered from an intervening power failure).

Where the indicating device shows decimal submultiples of the quantity measured, these submultiples shall be separated by a clear decimal sign from those showing units.

It may be possible to use one display for other indications as well, as long as it is clear which quantity is being displayed.

### 6.3.2 Indicating range

The indicating device shall be able to record and display the indicated quantity of gas corresponding to at least 1000 hours of operation at the maximum flowrate  $Q_{\max}$ , without returning to the original reading.

### 6.3.3 Resolution

The quantity corresponding to the least significant digit shall not exceed the quantity of gas passed during one hour at  $Q_{\min}$ .

If the least significant digit (last drum) shows a decimal multiple of the quantity measured, the faceplate or electronic display shall bear:

- a) either one (or two, or three, etc.) fixed zero(s) after the last drum or digit; or
- b) the marking : " $\times 10$  " (or " $\times 100$  ", or " $\times 1\ 000$  ", etc.),

so that the reading is always in the units mentioned in 4.1.

### 6.3.4 Mechanical indicating device

A mechanical indicating device shall consist of drums; the last element (i.e. the one with the **smallest** scale interval) may however be an exception to this rule.

The minimum height of the numerals shall be 4.0 mm and their minimum width shall be 2.4 mm.

The advance by one unit of a figure of any order shall take place completely while the figure of an order immediately below passes through the last tenth of its course.

### 6.3.5 Electromechanical or electronic indicating device

The continuous display of the quantity of gas during the period of measurement is not mandatory.

The electronic indicating device shall be provided with a display test.

### 6.3.6 Remote indicating device

If an indicating device is used remotely, the associated gas meter shall be clearly identified. The integrity of the communication between the instrument and the indicating device shall be checked.

*Note: The serial number of the associated gas meter can be used for a clear identification.*

## 6.4 Test element

### 6.4.1 General

Gas meters shall be designed and constructed incorporating:

- a) an integral test element, or
- b) a pulse generator, or
- c) arrangements permitting the connection of a portable test unit.

#### 6.4.2 Integral test element

The integral test element may consist of the last element of the mechanical indicating device in one of the following forms:

- a) a continuously moving drum bearing a scale, where each subdivision on the drum is regarded as an increment of the test element;
- b) a pointer moving over a fixed dial with a scale, or a disk with a scale moving past a fixed reference mark, where each subdivision on the dial or disk is regarded as an increment of the test element. On the numbered scale of a test element the value of one complete revolution of the pointer shall be indicated in the form: "1 rev = .... <unit>". The beginning of the scale shall be indicated by the figure zero.

The scale spacing shall not be less than 1 mm and shall be constant throughout the whole scale.

The scale interval shall be in the form  $1 \times 10^n$ ,  $2 \times 10^n$ , or  $5 \times 10^n$  <unit> (n being a positive or negative whole number or zero).

The scale marks shall be fine and uniformly drawn.

With an electronic indicating device the last digit is used as integral test element. The number of digits may be increased via a specific test mode, which can be accessed through either physical or electronic buttons or switches.

If applicable to the gas meter, the test element shall allow the experimental determination of the cyclic volume. The difference between the measured value of the cyclic volume and its nominal value shall not exceed 5 % of the latter at reference conditions.

#### 6.4.3 Pulse generator

A pulse generator may be used as a test element if the value of one pulse, expressed in units of volume, ~~or mass or energy~~, is marked on the gas meter.

The gas meter shall be constructed in such a way that the pulse value can be checked experimentally. The difference between the measured value of the pulse value and its value indicated on the gas meter, shall not exceed 0.05 % of the latter.

#### 6.4.4 ~~Portable~~ Attachable test ~~unit~~ device

An indicating device may include provisions for testing by inclusion of complementary elements (e.g. star wheels or discs), which provide signals for ~~a portable~~ an attachable test ~~unit~~ device.

The ~~portable~~ attachable test ~~unit~~ device may be used as a test element if the value of one pulse, expressed in units of volume, ~~or mass or energy~~, is marked on the gas meter.

#### 6.4.5 Increment of test element or pulse

The increment of the test element or pulse shall occur at least every 60 seconds at  $Q_{\min}$ .

### 6.5 Ancillary devices

#### 6.5.1 General

The gas meter may include ancillary devices, which may be permanently incorporated or added temporarily. Examples of their use are:

- flow detection before this is clearly visible on the indicating device;
- means for testing, verification and remote reading;

- prepayment.

Ancillary devices shall not affect the correct operation of the instrument. If ancillary devices are not subject to legal metrology control this shall be clearly indicated.

#### 6.5.2 Protection of drive shafts

When not connected to an attachable ancillary device, the exposed ends of the drive shaft shall be suitably protected.

#### 6.5.3 Torque overload

The connection between the measuring transducer and the intermediate gearing shall not be broken or altered if a torque of three times the permissible torque as indicated in 7.1.3 b) and 7.1.3 c) is applied.

### 6.6 Power sources

#### 6.6.1 Types of power sources

~~This Recommendation gives requirements for instruments~~ Gas meters may be powered by:

- mains power sources;
- non-replaceable battery power sources;
- replaceable battery power sources.

These three types of power sources may be used alone or in combination.

**Note:** For the purpose of this recommendation rechargeable power sources are considered replaceable.

#### 6.6.2 Mains power

An electronic gas meter shall be designed such that in the event of a mains power failure (AC or DC), the meter indication of the quantity of gas just before failure is not lost, and remains accessible for reading after failure without any difficulty.

Any other properties or parameters of the meter shall not be affected by an interruption of the electrical supply.

*Note: Compliance with this requirement will not necessarily ensure that the gas meter will continue to register the quantity of gas that passed through the gas meter during a power failure.*

The connection to the mains power source shall be capable of being secured from tampering.

#### 6.6.3 Non-replaceable battery power source

The manufacturer shall ensure that the indicated lifetime of the battery power source guarantees that the meter functions correctly for at least as long as the operational lifetime of the meter.

#### 6.6.4 Replaceable battery power source

If the instrument is powered by a replaceable battery power source, the manufacturer shall give detailed specifications for the replacement thereof.

The date by which the battery power source, shall be replaced shall be indicated on the meter. Alternatively, the remaining battery power source, life can be displayed or a warning can be given when 10 % of the estimated life of the battery power source, remains.

The properties and parameters of the meter shall not be affected during replacement of the battery power source,.

The battery power source shall be able to be replaced without breaking the metrological seal.



The ~~battery~~ compartment of the power source shall be capable of being secured from tampering.

## **6.7 Checks, limits and alarms for electronic gas meters**

### 6.7.1 Checks

An electronic gas meter is required to:

- detect the presence and correct functioning of transducers and devices;
- check the integrity of stored, transmitted and presented data; and
- check the pulse transmission (if applicable).

*Note: Pulse transmission checks focus on missing pulses, or additional pulses due to interference. Examples are double pulse systems, three-pulse systems or pulse timing systems.*

### 6.7.2 Limits

The gas meter may also be capable to detect and act upon:

- overload flow conditions;
- measurement results that are outside the maximum and minimum values of the transducers;
- measured quantities that are outside certain pre-programmed limits; and
- reverse flow.

If the gas meter is equipped with limit detection the correct functioning shall be tested during the type evaluation.

### 6.7.3 Alarms

If malfunctions are registered while checking the items as indicated in 6.7.1 or if the conditions as indicated in 6.7.2 are detected, the following actions shall be performed:

- a visible or audible alarm, which remains present until the alarm is acknowledged and the cause of the alarm is suppressed;
- continuation of the registration in specific alarm registers (if applicable) during the alarm, in which case default values may be used for the pressure, temperature, compressibility, density or superior calorific value; and
- registration in a log (if applicable).

## **6.8 Software**

The requirements concerning the software applied in the gas meters within the scope of this recommendation are presented in the mandatory Annex I.

## 7 Inscriptions

### 7.1 Markings and inscriptions

All markings shall be easily legible and indelible under rated conditions of use.

Any marking other than those prescribed in the type approval document shall not lead to confusion.

#### ~~1.2.5~~ General applicable markings for gas meters

As relevant, the following information shall be marked on the casing or on an identification plate, ~~or clearly and unambiguously~~. **Alternatively the markings presented with an asterisk (\*) could be made visible via the electronic indicating device: in a clear and unambiguous manner.**

#### 7.1.1 General applicable markings for gas meters

- a) Type approval mark (according to national or regional regulation);
- b) Name or trade mark of the manufacturer;
- c) Type designation;
- d) Serial number of the gas meter and its year of manufacture;
- e) Accuracy class;
- f) Maximum flowrate  $Q_{\max} = \dots <\text{unit}>$ ;
- g) Minimum flowrate  $Q_{\min} = \dots <\text{unit}>$ ;
- h) Transition flowrate  $Q_t = \dots <\text{unit}>$ ; (\*)
- i) Gas temperature range and pressure range for which the errors of the gas meter shall be within the limits of the maximum permissible error, expressed as:
 

$t_{\min} - t_{\max} = \dots - \dots <\text{unit}>$ ; (\*)

$p_{\min} - p_{\max} = \dots - \dots <\text{unit}>$  ~~gauge pressure~~; (\*)
- j) The density range within which the errors shall comply with the limits of the maximum permissible error may be indicated, and shall be expressed as:
 

$\rho = \dots - \dots <\text{unit}>$  (\*)

This marking may replace the range of working pressures (i) unless the working pressure marking refers to a built-in conversion device;
- k) Pulse values of HF and LF frequency outputs (imp/<unit>, pul/<unit>, <unit>/imp); (\*)
 

*Note: The pulse value is given to at least six significant figures, unless it is equal to an integer multiple or decimal fraction of the used unit.*
- l) Letter V or H, as applicable, if the meter can be operated only in the vertical or horizontal position;
- m) Indication of the flow direction, e.g. an arrow (if applicable, see 6.2.1 and 6.2.2);
- n) Measurement point for the working pressure according to 10.1.4; and
- o) Environmental temperatures, if they differ from the gas temperature as mentioned in i). (\*)

~~7.1.1~~7.1.2 Additional markings for ~~mechanical~~ gas meters with a built-in ~~mechanical~~ conversion device having only one indicating device

- a) Base temperature  $t_b = \dots$  <unit>; (\*)
- b) Temperature  $t_{sp} = \dots$  <unit> specified by the manufacturer according to 0. (\*)

~~7.1.2~~7.1.3 Additional markings for gas meters with output drive shafts

- a) Gas meters fitted with output drive shafts or other facilities for operating detachable additional devices shall have each drive shaft or other facility characterized by an indication of its constant (C) in the form “1 rev = ... <unit>” and the direction of rotation. “rev” is the abbreviation of the word “revolution”;
- b) If there is only one drive shaft the maximum permissible torque shall be marked in the form “ $M_{\max} = \dots$  N.mm”;
- c) If there are several drive shafts, each shaft shall be characterized by the letter M with a subscript in the form “ $M_1, M_2, \dots M_n$ ”;
- d) The following formula shall appear on the gas meter:

$$k_1M_1 + k_2M_2 + \dots + k_nM_n \leq A \text{ N.mm},$$

where:

A is the numerical value of the maximum permissible torque applied to the drive shaft with the highest constant, where the torque is applied only to this shaft; this shaft shall be characterised by the symbol  $M_1$ ,

$k_i$  ( $i = 1, 2, \dots n$ ) is a numerical value determined as follows:  $k_i = C_1 / C_i$ ,

$M_i$  ( $i = 1, 2, \dots n$ ) represents the torque applied to the drive shaft characterized by the symbol  $M_i$ ,

$C_i$  ( $i = 1, 2, \dots n$ ) represents the constant for the drive shaft characterized by the symbol  $M_i$ .

~~7.1.3~~7.1.4 Additional markings for gas meters with electronic devices

- a) For an external power supply: the nominal voltage and nominal frequency;
- b) For a ~~non-replaceable or~~ replaceable battery: the latest date by which the battery is to be replaced, or **alternatively** the remaining battery capacity; **can be presented on the electronic indicating device;** (\*)  
*Note: in case of an automatic alarm .....*
- c) Software identification of the firmware. (\*)

## 8 Operating instructions

### 8.1 Instruction manual

Unless the simplicity of the measuring instrument makes this unnecessary, each individual instrument shall be accompanied by an instruction manual for the user.

However, groups of identical measuring instruments delivered to the same customer do not necessarily require individual instruction manuals.

The instruction manual shall be in the official language(s) of the country (or an other generally accepted language according to national legislation) and easily understandable.

It shall include:

- a) operating instructions;
- b) maximum and minimum storage temperatures;
- c) rated operating conditions;
- d) warm-up time after switching on the electrical power (if applicable);
- e) all other relevant mechanical and electromagnetic environmental conditions;
- f) a specification of the required voltage (-range) and frequency (-range) for instruments, powered by an external power ~~converter: specifications of this power converter~~source;
- g) any specific installation conditions ~~like~~, for instance a limitation of the length of signal, data, and control lines;
- h) if applicable: the specifications of the battery;
- i) instructions for installation, maintenance, repairs, storage, transport and permissible adjustments (this can be in a separate document, not meant for the user/owner);
- j) conditions for compatibility with interfaces, sub-assemblies (modules) or other measuring instruments.

### 8.2 Installation conditions

The manufacturer shall specify the installation conditions (as applicable) with respect to:

- the position to measure the working temperature of the gas;
- filtering;
- levelling and orientation;
- flow disturbances;
- pulsations or acoustic interference;
- rapid pressure changes;
- absence of mechanical stress (due to torque and bending);
- mutual influences between gas meters;
- mounting instructions;
- maximum allowable diameter differences between the gas meter and connecting pipework; and
- other relevant installation conditions.

## 9 Sealing

### 9.1 Verification marks and protection devices

#### 9.1.1 General provision

Protection of the metrological properties of the meter is accomplished via hardware (mechanical) sealing or via electronic sealing devices.

In any case, memorized quantities of gas measured (volume, ~~mass~~ or ~~energy~~) shall be protected by means of a hardware seal.

The design of verification marks and hardware seals is subject to national or regional legislation. Seals shall be able to withstand outdoor conditions.

#### 9.1.2 Verification marks

Verification marks indicate that the gas meter has successfully passed the initial verification. ~~Verification marks shall be realized as~~ This is a hardware ~~seals-~~marking

#### 9.1.3 Hardware sealing

In case of hardware sealing the location of the marks shall be chosen in such a way that the dismantling of the part sealed by one of these marks results in permanently visible damage to this seal.

Locations to be sealed with verification or protection marks shall be provided on the instrument:

- a) On all plates which bear information prescribed by this Recommendation;
 

*Note This requirement is only necessary if the nameplate can be detached from the meter.*
- b) On all parts of the case which cannot be otherwise protected against interference likely to affect the accuracy of the measurement.

#### 9.1.4 Electronic sealing devices

9.1.4.1 When access to parameters that contribute to the determination of results of measurement needs to be protected, but is not protected by mechanical seals, the protection shall fulfil the following provisions:

- a) Access shall only be allowed to authorized people, for example by means of a code (password) or special device (hard key, etc.) and, after changing parameters, the instrument may be put into use “in sealed condition” again without any restriction,

or

Unrestricted access is allowed but, after changing the parameters, the instrument shall be put back into use “in sealed condition” only by authorized persons, e.g. by using a “password” (similar to classical sealing).

- b) The code (password) shall be changeable.
- c) The device shall either clearly indicate when it is in the configuration mode (not under legal metrological control), or it shall not operate while in this mode. This status shall remain until the instrument has been put into use “in sealed condition” in accordance with clause (a).
- d) Identification data concerning the most recent intervention shall be recorded in an event logger. The record shall include at least:
  - an identification of the authorized person that implemented the intervention; and
  - ~~the~~ an event counter or date and time of the intervention as generated by the internal clock.

Besides the above-mentioned items it is also recommended to store the following:

- an event counter;
- the old value of the changed parameter;
- totals of the registers; ~~and.~~  
~~—an identification of the authorized person who implemented the intervention.~~

The traceability of the most recent intervention shall be assured. If it is possible to store the records of more than one intervention, and if deletion of a previous intervention must occur to permit a new record, the oldest record shall be deleted.

9.1.4.2 For instruments with parts which may be disconnected one from another, whether these are interchangeable or not, the following provisions shall be fulfilled:

- a) It shall not be possible to access parameters that participate in the determination of results of measurements through disconnected points unless the provisions in clause 9.1.4.1 are fulfilled;
- b) Interposing any device which may influence the accuracy shall be prevented by means of electronic and data processing securities or, if not possible, by mechanical means.
- c) Moreover, these instruments shall be provided with devices which do not allow them to operate if the various parts are not configured according to the manufacturer's specification.

*Note: Unauthorized disconnections by the user may be prevented, for example by means of a device that prevents any measurement after disconnecting and reconnecting.*

## 10 Suitability for testing

The design of The instrument shall be designed such that as to allow initial and subsequent verification and metrological supervision can be carried out on site, without unreasonable effort.

### 1.3 Use of different gases for testing

When gas meters are to be verified (at initial or subsequent verification) with a type of gas different from that at operating conditions the maximum mutual difference between the error curves of the gas meter, obtained as result of testing with different gases, is limited to 0.5 times the maximum permissible error.

*Example — In case it is the intention to perform the verifications*

#### 10.1 Pressure tappings

##### 10.1.1 General

If a gas meter is designed to operate above an absolute pressure of 0.15 MPa, the manufacturer shall either equip the meter with pressure tappings, or specify the position of pressure tappings in the installation pipe work. In any case those tappings shall be designed to avoid the effect of potential condensation.

*Note: This requirement is not mandatory for meters for direct mass measurement or for meters with a built-in pressure sensor.*

##### 10.1.2 Bore

The bore of the pressure tappings shall be large enough to allow correct pressure measurements.

##### 10.1.3 Closure

Pressure tappings shall be provided with ~~air while in practice under operating conditions~~ a means of closure to make them gas-tight.

##### 10.1.4 Markings

The pressure tapping on the gas meter for measuring the working pressure (3.3.7) shall be clearly and indelibly marked “ $p_m$ ” (i.e. the pressure measurement point) or “ $p_r$ ” (i.e. the pressure reference point) and other pressure tappings “ $p$ ”.

---

## **Annex I : Requirements for software controlled Gas Meters (Mandatory)**

*For the following requirements, severity level (I) of OIML D 31:2008 is applied except for A.1.1, A.2.3.3 where severity level (II) is applied.*

*The specific software terminology is defined in OIML D 31:2008 Section 3.*

### **I.1. General requirements**

#### **I.1.1. Software identification**

The legally relevant parts of the software of a gas meter ~~is~~ and/or its constituents shall be clearly identified with the software version or any other token. The identification may consist of more than one part but at least one part shall be dedicated to the legal purpose.

The identification shall be inextricably linked to the software and shall be:

- presented or printed on command or
- displayed during operation or
- displayed at start up for gas meters that can be switched on and off.

If a constituent of the gas meter has no display, the identification shall be sent to some other device via a communication interface in order to be displayed on this device.

The software identification and the means of identification shall be stated in the type approval certificate.

#### **I.1.2 Correctness of algorithms and functions**

The measuring algorithms and functions of the gas meter and/or its constituents shall be appropriate and functionally correct.

It shall be possible to examine algorithms and functions either by metrological tests, software tests or software examination.

#### **I.1.3 Software protection (against fraud )**

The legally relevant software part shall be secured against unauthorized modification, loading, or changes by swapping the memory device. In addition to mechanical sealing, technical means may be necessary to protect gas meters equipped with an operating system or an option to load software.

Only clearly documented functions (see A.3) are allowed to be activated by the user interface, which shall be realized in such a way that it does not facilitate fraudulent use.

Parameters that fix the legally relevant characteristics of the gas meter shall be secured against unauthorized modification. For the purpose of verification, displaying of the current parameter settings shall be possible..

*Note: Device-specific parameters may be adjustable or selectable only in a special operational mode of the instrument. They may be classified as those that should be secured (unalterable) and those that may be accessed and (alterable parameters) by an authorized person, e.g. the instrument owner or product vendor.*

Software protection comprises appropriate sealing by mechanical, electronic and/or cryptographic means, making an unauthorized intervention impossible or evident.



### **I.1.3.1 Support of fault detection**

The detection by the checking facilities of significant faults may be achieved by software. In such a case, this detecting software is considered legally relevant.

The documentation to be submitted for type approval shall contain a list of the faults that will be detected by the software and the expected reaction and in case needed for understanding its operation, a description of the detecting algorithm.

## **I.2. Requirements specific for configurations**

### **I.2.1 Specifying and separating relevant parts and specifying interfaces of parts**

Metrologically relevant parts of a gas meter – whether software or hardware parts – shall not be inadmissibly influenced by other parts of the gas meter.

This requirement applies if the gas meter and/or its constituents has interfaces for communicating with other electronic devices, with the user, or with other software parts next to the metrologically critical parts.

#### **I.2.1.1 Separation of constituents of a gas meter**

I.2.1.1.a Constituents of a gas meter that perform functions which are relevant to legal metrology shall be identified, clearly defined, and documented. These form the legally relevant part of the gas meter.

I.2.1.1.b It shall be demonstrated that those relevant functions and data of constituents cannot be inadmissibly influenced by commands received via an interface.

This implies that there is an unambiguous assignment of each command to all initiated functions or data changes in the constituent.

#### **I.2.1.2 Separation of software parts**

I.2.1.2.a All software modules (programs, subroutines, objects, etc.) that perform functions which are relevant to legal metrology or that contain legal metrology relevant data domains are considered the legal metrology relevant software part of a gas meter. This part shall be made identifiable as described in I.1.1.

If the separation of the software is not possible, the software is legally relevant as a whole.

I.2.1.2.b If the legal metrology relevant software part communicates with other software parts, a software interface shall be defined. All communication shall be performed exclusively via this interface. The legal metrology relevant software part and the interface shall be clearly documented. All legally relevant functions and data domains of the software shall be described to enable a type approval authority to decide on correct software separation.

The interface consists of program code and dedicated data domains. Defined coded commands or data are exchanged between the software parts by storing to the dedicated data domain by one software part and reading from it by the other. Writing and reading program code is part of the software interface.

The data domain forming the software interface including the code that exports from the legally relevant part to the interface data domain and the code that imports from the interface to the legally relevant part shall be clearly defined and documented. The declared software interface shall not be circumvented.

The manufacturer is responsible for respecting these constraints. Technical means (such as sealing) of preventing a program from circumventing the interface or programming hidden commands are not possible. The

programmer of the legal metrology relevant software part as well as the programmer of the legally non-relevant part should be provided with instructions concerning these requirements by the manufacturer.

I.2.1.2.c There shall be an unambiguous assignment of each command to all initiated functions or data changes in the legally relevant part of the software. Commands that communicate through the software interface shall be declared and documented. Only documented commands are allowed to be activated through the software interface. The manufacturer shall state the completeness of the documentation of commands.

I.2.1.2.d Where legal metrology relevant software has been separated from non-relevant software, the legal metrology relevant software shall have priority using the resources over non-relevant software. The measurement task (realized by the legal metrology relevant software part) must not be delayed or blocked by other tasks.

The manufacturer is responsible for respecting these constraints. Technical means for preventing a legally non-relevant program from disturbing legally relevant functions shall be provided. The programmer of the legally relevant software part as well as the programmer of the legal metrology non-relevant part should be provided with instructions concerning these requirements by the manufacturer.

## **I.2.2 Shared indications**

A display may be employed for presenting both information from the legal metrology relevant part of software and other information.

Software that realizes the indication of measurement values and other legally relevant information belongs to the legally relevant part.

## **I.2.3 Storage of data, transmission via communication systems**

If measurement values will be used ~~for natural gas~~ at a location different from the place of measurement or at a stage later than the time of measurement possibly they need to leave the gas meter (electronic device, sub-assembly) and be stored or transmitted in an insecure environment before they are used for legal purposes. In that case the following requirements apply:

I.2.3.1 The measurement value stored or transmitted shall be accompanied by all relevant information necessary for the future legally relevant use.

I.2.3.2 The data shall be protected by software means as to guarantee the authenticity, integrity and, if necessary the correctness of the information concerning the time of measurement. The software that displays or further processes the measurement values and the accompanying data shall check the time of measurement, authenticity, and integrity of the data after having read them from the insecure storage or after having received them from an insecure transmission channel.

The memory device shall be fitted with a checking facility to ensure that if an irregularity is detected, the data shall be discarded or marked unusable.

Software modules that prepare data for storing or sending, or that check data after reading or receiving are considered part of the legally relevant software.

I.2.3.3 When transferring measurement values through an open network, it is necessary to apply cryptographic methods. Confidentiality key-codes employed for this purpose shall be kept secret and secured in

the measuring instruments, electronic devices, or sub-assemblies involved. Security means shall be provided whereby these keys can only be input or read if a seal is broken.

#### **I.2.3.4 Transmission delay**

The measurement shall not be inadmissibly influenced by a transmission delay.

#### **I.2.3.5 Transmission interruption**

If network services become unavailable, no measurement data shall be lost. The measurement process should be stopped to avoid the loss of measurement data.

#### **I.2.4 Automatic storage**

When, considering the application, data storage is required, measurement data must be stored automatically, i.e. when the final value used for the legal purpose has been generated.

The storage device must have sufficient permanency to ensure that the data are not corrupted under normal storage conditions. There shall be sufficient memory storage for any particular application.

When the final value used for the legal purpose results from a calculation, all data that are necessary for the calculation must be automatically stored with the final value.

#### **I.2.5 Deleting of data**

Stored data may be deleted when the transaction is settled;

Only after this condition is met and insufficient memory capacity is available for storage of successive data, it is permitted to delete memorised data when both the following conditions are met:

- the sequence of deletion of data will be in the same order as the recording order (fifo) while the rules established for the particular application are respected;
- the required deletion will start either automatically or after a specific manual operation.

## Part 2 Metrological controls and performance tests

### 11 Metrological controls

#### 11.1 General procedures

##### 11.1.1 Test method

All tests shall be carried out under the installation conditions (~~e.g.~~ straight sections of piping upstream and downstream of the meter), **flow conditioners, etc.**) stipulated by the supplier ~~for this~~of the type of meter **to be tested**.

~~The used test~~All equipment **used and incorporated** as part of **the execution of the test procedure** shall be ~~equipped with reference standards that are~~ suitable for the testing of the ~~gas meters~~meter(s) **under test**. The working range of ~~the all equipment and~~ reference standards shall ~~match~~**equal or exceed** that of the ~~meters to be tested~~. ~~The meter(s) under test equipment~~. **All reference standards used** shall be traceable to national **and/or** international standards **of measurement**.

If meters are to be tested in series, there should be no significant interaction between the meters. This condition may be verified by testing every meter of the series once at each position in the line.

During the tests corrections shall be made for temperature and pressure differences between the meter(s) under test and the **reference standard** ~~or; otherwise~~ these differences have to be taken into account in the uncertainty calculations. ~~The temperature and pressure measurements have to be performed at a representative position at the meter(s) under test and the standard.~~

**The temperature and pressure measurements have to be performed at a representative position on the meter(s) under test and on the reference standard.**

##### 11.1.2 Uncertainty

When a test is conducted, the expanded uncertainty<sup>1</sup>~~( $k=2$ )~~ of the determination of errors of the measured gas quantity shall meet the following specifications:

- for type evaluation: less than one-fifth of the applicable MPE;
- for verifications: less than one-third of the applicable MPE.

However, if the above-mentioned criteria cannot be met, the test results can be approved alternatively by reducing the applied maximum permissible errors with the excess of the uncertainties. In this case the following acceptance criteria shall be used:

- for type evaluation:  $\pm(\frac{1}{5} \cdot MPE - U)$ ;
- for verifications:  $\pm(\frac{1}{3} \cdot MPE - U)$ .

The estimation of the expanded uncertainty  $U$  is made according to the *Guide to the expression of uncertainty in measurement* (GUM, **2008 edition**) [6] with a ~~coverage factor  $k=2$~~  **with a level of confidence of approx. 95 %**

<sup>1</sup> As defined in GUM .....covering etc.e

Example: *When assuming during testing for type evaluation of an Accuracy Class 1 gas meter, the test result has an uncertainty of 0.3 % ( $k = 2$ ). In this case the test results can be accepted if the error is between  $\pm (6/5 \times 1.0 - 0.3) \% = \pm 0.9 \%$ .*

## 12 Type evaluation

### 12.1 General

Each type of gas meter is subject to the type evaluation procedure.

~~No modification may be made to an approved type~~ without authorization by the authority that issued the type approval certificate, ~~no modification may be made to an approved type.~~

The calculator (including indicating device) and the measuring transducer (including flow, volume, ~~or mass~~ ~~or energy~~ sensor) of a gas meter, where they are separable and interchangeable with other calculators and measuring transducers of the same or different designs, may be the subject of separate type evaluations.

### 12.2 Documentation

Applications for type ~~approval~~ ~~evaluation~~ of gas meters shall be accompanied by the following documents:

- a description of the meter giving the technical characteristics, and the principle of its operation;
- a perspective drawing or photograph of the meter;
- ~~mechanical~~ drawings of the ~~metrological~~ essential ~~mechanical~~ parts;
- a description of the electronic devices with drawings, diagrams and general software information explaining their characteristics and operation (if applicable);
- a drawing showing the location of the verification marks and seals;
- a drawing of ~~regulatory~~ ~~the applicable~~ markings;
- a declaration specifying that the meter is manufactured in conformity with requirements for safety, particularly those concerning the maximum working pressure as indicated on the data plates.

### 12.3 Type evaluation procedures

#### 12.3.1 Number of ~~samples~~ ~~specimens~~

The applicant shall deliver the requested number of ~~samples~~ ~~specimens~~ of gas meters, manufactured in conformity with the type, at the disposal of the authority responsible for type evaluation.

If so requested by the authority responsible for the type evaluation, these meters shall include more than one size if simultaneous approval of a family of gas meters is requested.

Depending on the results of the tests, the authority responsible for the type evaluation may request further specimens.

~~In order to accelerate the test procedure, the testing laboratory may carry out different tests simultaneously on different units. In this case, the testing laboratory shall assure that all submitted instruments are of the same type.~~

~~In general all accuracy and influence tests shall be performed on the same unit, but disturbance tests may be carried out on additional instruments. In this case, the testing laboratory decides which test(s) to be carried out on which unit.~~

~~If a specimen does not pass a specific test and as a result needs to be modified or repaired, the applicant shall apply this modification to all the specimens submitted for the test. These modified specimen(s) shall again be subjected to this particular test. If the testing laboratory has well-founded reasons to believe that the modification could have a negative impact on the result of another test or tests already performed, these tests shall be repeated as well.~~

#### 12.3.2 Reference conditions

All influence quantities, except for the influence quantity being tested, shall be ~~held~~ ~~kept~~ to the following values during type evaluation tests on a gas meter:

Working (gas/air) temperature:	(20.0 ± 5.0) °C;
Ambient temperature:	(20.0 ± 5.0) °C;
Ambient atmospheric pressure:	86 - 106 kPa;
Ambient relative humidity:	60 % ± <del>15</del> 25 %;
Power voltage (AC/DC mains / battery):	
* if one nominal voltage is specified:	this specified nominal voltage ( $U_{nom}$ );
* if a voltage range is specified:	a typical voltage within this range; to be negotiated between the manufacturer and the test laboratory;
Power voltage (battery):	the nominal voltage of a new or fully charged battery (not under charge);
Power frequency (AC mains):	nominal frequency ( $f_{nom}$ ).

*Note: High pressure tests may be performed at conditions other than reference conditions.*

### 12.3.3 Flowrates

The flowrates on which the errors of the gas meters shall need to be determined at a minimum of 6 flowrates, which are shall be distributed over the measuring range at regular intervals, including and include  $Q_{min}$ ,  $Q_t$  and  $Q_{max}$  and preferably  $Q_i$ .

Based on three test points per decade the minimum number (N) of test points, ranking from  $i = 1$  to  $i = N$  can be calculated according to:

$$N = 1 + 3 \cdot \log\left(\frac{Q_{max}}{Q_{min}}\right).$$

Where  $N \geq 6$  and rounded to the nearest integer.

For flowrates covering more than one decade the following formula presents an adequate regular distribution of flowrates for  $i = 1$  to  $i = N-1$  and  $Q_N = Q_{min}$ .

$$Q_i = \left(\sqrt[3]{10}\right)^{i-1} \cdot Q_{max}$$

### 12.3.4 Test gases

All the tests listed in 12.4 can be performed with air or any other gas as specified by the manufacturer under the rated operating conditions stated in 5.1. For the temperature tests in 12.4.8 it is important that the gas be dry.

The test with different gases as stated in 12.4.13 is performed with the gases specified by the manufacturer.

When gas meters are to be verified (at initial or subsequent verification) with air (or a type of gas different from that at operating conditions) the test shall include air (or the other gas(-es)).

In such case the maximum mutual differences between the error curves are established as required for the initial or subsequent verification (see 13.1.3).

In case such mutual differences are within 1/3 MPE the initial or subsequent verification may be performed with air (or the other gas(-es)). When the mutual differences exceed 1/3 MPE the initial or subsequent verification may only be performed with air or the other gas(-es) if correction for the mutual differences is applied.

The authority responsible for type evaluation shall report whether the initial or subsequent verification may be performed with air (or the other gas(-es)) and in the latter case the mutual differences.





## 12.4 Type evaluation tests

During the type evaluation gas meters are tested while applying the requirements as stated in chapter 5. Annex C shows an overview of the required tests for different measurement principles.

### 12.4.1 Design inspection

Each type of gas meter submitted shall be inspected externally to ensure that it complies with the provisions of the relevant preceding clauses of these requirements (4, 5, 7, 8, 9 and 10).

### 12.4.2 Error

The error of the gas meter shall be determined, while using the flowrates according to the prescriptions stated in 12.3.3. The error curve as well as the WME (1.1.1) shall be within the requirements as specified in 5.3 and 5.4 respectively.

If a curve fit is made out of the observations a minimum of 6 degrees of freedom is required.

*Note* The number of degrees of freedom is the difference between the number of observations and the number of parameters or coefficients needed for the curve fit. For example, if a polynomial curve fitting is used with 4 coefficients, at least 10 measuring points are necessary in order to get a minimum of 6 degrees of freedom.

During the accuracy test applied on the gas meter, the following quantities shall be determined:

- the cyclic volume of the gas meter, if applicable, according to the provisions of the last sentence in 6.4.2.
- the pulse factor of the gas meter, if applicable, according to the provisions of 6.4.3.
- the maximum pressure differential at  $Q_{\max}$  and density of the gas, used for this test.

### 12.4.3 Reproducibility

~~Gas meters, which are sensitive to hysteresis behaviour, are tested at the flowrates in conformance to 12.3.3, equal to or greater than  $Q_t$ . For each of these flowrates, the errors shall normally be determined six times independently at least six times, by, while varying the flowrate between each consecutive measurement. For~~ The reproducibility of error at each flowrate shall be determined.

In case the ~~experimental standard deviation~~ reproducibility of error of the, at least, six first three measurements is ~~calculated~~ equal to or smaller than 1/6 MPE the requirement is deemed to be met.

*Note* ~~Gas meters with internal moving parts or meters based on the Vortex principle may have a hysteresis behaviour.~~

*Note*: For gas meters which are intended to be used at high pressures, this test may be performed at the lowest operating pressure.

### 12.4.4 Repeatability

~~Gas meters, which are not sensitive to hysteresis behaviour, are tested at the flowrates  $Q_{\min}$ ,  $Q_t$ , and  $Q_{\max}$ . At each flowrate of these flowrates, the errors are determined at least three times. For each flowrate and~~ the difference between the maximum and minimum measured error is calculated.

*Note*: For gas meters which are intended to be used at high pressures, this test may be performed at the lowest operating pressure.

### 12.4.5 Orientation

The accuracy measurements as stated in 12.4.2 are performed in all ~~prescribed~~ orientations, as stipulated by the manufacturer. The results of the different accuracy measurements are evaluated with the requirements as laid down in 5.13.1 without intermediate adjustments.

*Note*—If the requirements are not fulfilled for all prescribed orientations without intermediate adjustments, the meter shall be marked in order to be used in a certain orientation only, as indicated in 7.1.1 l).

#### 12.4.6 Flow direction

The accuracy measurements as stated in 12.4.2 are performed in both flow directions. The results of the different accuracy measurements are evaluated with the requirements as laid down in 5.13.2 without intermediate adjustments.

*Note*—If the requirements are not fulfilled for both flow directions without intermediate adjustments, the meter shall be marked in order to be used in a certain direction only, as indicated in 6.2.

#### 12.4.7 Working pressure

The accuracy measurements as stated in 12.4.2 are performed at least at the minimum and at the maximum operating pressure. ~~However, for specified maximum pressures above 5 MPa (50 bar) a test at 5 MPa (50 bar) is deemed to be acceptable.~~

The results of the different accuracy measurements are evaluated with the requirements as laid down in 5.8 without intermediate adjustments.

If the requirements are not fulfilled for the operating pressure range without intermediate adjustments, when putting into use either the operating pressure range can be reduced or the operating pressure range can be split into several ranges. Alternatively pressure correction can be applied.

For technologies that are proven to be insensitive to pressure or diaphragm meters this test is not applicable.

#### 12.4.8 Temperature

The temperature dependency of the gas meter shall be evaluated in the temperature range specified by the manufacturer, by one of the methods stated below, ranked in the following preferred order:

a) Flow tests at different temperatures ~~(for mechanical and electronic domestic meters)~~

The flow tests are performed with a gas temperature equal to the ambient temperature as specified in 12.4.8.1. For gas meters with a built-in ~~temperature~~ conversion device ~~showing the volume at base conditions only~~ also ~~the~~ flow tests are ~~to be~~ performed with a gas temperature different from the ambient temperature as specified in 12.4.8.2.

*Note:* ~~National Authorities shall define which instruments are considered to be domestic meters.~~

b) Monitoring the unsuppressed flowrate output of the meter at no-flow conditions at different temperatures ~~(for electronic meters)~~

At no-flow conditions the unsuppressed flowrate output of the meter is used in order to determine the temperature influence on the meter accuracy. The examination is performed at least at the reference temperature, the minimum and maximum operating temperature. The results of the measurements at the different temperatures are evaluated with the requirements as laid down in 5.9, while taking into account the influence of the flowrate shift on the meter curve.

*Example:* The unsuppressed flowrate output of an Accuracy Class 1 gas meter is changed with +1 l/h due to temperature variations. The initial error at reference conditions of this meter was + 0.3 % at a  $Q_{min}$  of 200 l/h. The influence due to temperature variations at  $Q_{min}$  is  $1/200 \times 100 \% = + 0.5 \%$ . The final value of + 0.8 % remains within the limits of the applicable maximum permissible error.

c) Evaluation of the construction of the meter

In cases when the meter cannot be tested to determine the effect of temperature, the uncertainty resulting from the expected influence of temperature on the meter construction shall be evaluated.

For residential meters flow tests are mandatory (method a).

#### 12.4.8.1 Flow tests with equal gas and ambient temperatures

The flow tests are performed at those in 12.3.3 determined flow rates, in the flow range  $Q_t$  up to  $Q_{max}$ , with the gas temperature equal to the ambient temperature; (within 5 °C), at:

- Reference temperature;
- Maximum ambient temperature;
- Minimum ambient temperature;
- Reference temperature.

The requirements as laid down in 5.9 for equal gas and ambient temperature are applicable.

#### 12.4.8.2 Flow tests with unequal gas and ambient temperatures

The flow tests are performed while keeping the gas meter under test at a constant ambient temperature equal to the reference temperature. The gas or air is heated such that the gas temperature at the meter inlet is 20 °C above the reference temperature. The error is determined at  $Q_t$  and  $Q_{max}$ . Determination of errors shall be performed only after the temperature of the gas is stabilized.

*Note:* Instead of the above-mentioned temperature test some authorities may require alternatively the following test:

The flow tests are may be performed at  $Q_t$  while using the following temperatures:

~~Maximum ambient temperature and a conditions:~~

- Gas temperature 30 at 20 °C below this ambient and the gas meter at 40 °C;
- Gas temperature; at 20 °C and ther gas meter at 0 °C.

~~Minimum ambient temperature and a gas temperature 30 °C above this ambient temperature.~~

The requirements for unequal gas and ambient temperature as laid down in 5.9 are applicable.

#### 12.4.9 Flow disturbance

The gas meters of which the accuracy is affected by flow disturbances are submitted to the tests as specified in Annex B. During the tests the meter shall be installed according to the manufacturer's specifications. The requirements as laid down in . are applicable

The requirements as laid down in 5.13.3. are applicable.

#### 12.4.10 Durability

All gas meters with internal moving parts and gas meters without internal moving parts having a maximum equivalent volume flowrate up to and including 25 m<sup>3</sup>/h are submitted to the durability test. This test consists of periods of continuous running, while using gases for which the meters are intended to be used. If the manufacturer demonstrates that the material of the gas meter is sufficiently insensitive to the gas composition, the authority responsible for the type evaluation may decide to perform the durability test with air or another suitable type of gas. The test shall be finished within 120 days. The applied flow rate is at least 0,8 Q<sub>max</sub>. This test may be performed at the minimum working pressure.

Before and after the test the same reference equipment shall be used.

The authority responsible for the type evaluation shall choose the number of meters of the same type to be submitted for the durability test from the options given in Table 5 in consultation with the applicant. If different sizes are included, the total number of meters to be submitted shall be as stated in option 2.

Table 5 Number of meters to be tested

Maximum equivalent volume flowrate [m <sup>3</sup> /h]	Number of meters to be tested	
	Option 1	Option 2
$Q_{\max} \leq 25$	3	6
$25 < Q_{\max} \leq 100$	2	4
$Q_{\max} > 100$	1	3

After the durability test the gas meters are tested at flow rates as determined in 11.3.3.

The gas meters shall comply with the requirements laid down in 5.10. (with the exception of one of them if the durability test has been carried out on a number of gas meters according to option 2) shall comply with the requirements laid down in

#### 12.4.11 Drive shaft (torque)

The gas meters with drive shafts are submitted to the maximum possible torque, while using a gas at a density of 1.2 kg/m<sup>3</sup>. The fault at  $Q_{\min}$  is evaluated. The requirements as laid down in are applicable.

The requirements as laid down in 5.13.4. are applicable.

Where a type of gas meter includes various sizes, this test needs only be carried out on the smallest size, provided that the same torque is specified for the larger gas meters and the drive shaft of the latter has the same or greater output constant.

#### 12.4.12 Overload flow

Gas meters with internal moving parts are submitted to the overload flow. Before and after the overload the error of the gas meter is determined for its whole flow rate range according to 12.3.3. The requirements as laid down in are applicable.

The requirements as laid down in 5.11 are applicable.

#### 12.4.13 Different gases

Gas meters which are intended to be used for different gases are submitted to accuracy measurements as stated in 12.4.2 with the gases, specified by the manufacturer.

Taking into consideration the manufacturer proposal, the authority responsible for the type evaluation shall decide which gases are to be used during the investigation examination, depending on the application purpose of the gas meter under test.

The requirements as laid down in 5.13.5 are applicable.

If as a result of these accuracy measurements the gas meter does not comply clause fulfilled for all different gases without intermediate adjustments, the authority responsible for type evaluation shall report that initial verifications can only be performed with a gas equal to the one which is used at on this observation and specify this range of operating conditions gases for which the gas meter has fulfilled the requirements.

#### 12.4.14 Vibration and shocks

Gas meters with having a maximum weight of 10 kg are submitted to vibrations and shocks, as well as only the electronics part of. For gas meters exceeding this weight, only the electronics part of meter are to be tested. Before and after these tests the intrinsic error of the gas meter is determined for its over the whole flow rate range according to 12.3.3.

The requirements as laid down in 5.12 are applicable.

#### 12.4.15 Interchangeable components

For the gas meters of which some components are meant to be interchanged, **as specified by the manufacturer**, the influence of interchange shall be determined at  $Q_t$ .

Note : The maximum permissible error limits of the upper flow range apply. ( $Q \geq Q_t$ )

This test consists of the following accuracy tests:

- while using the starting configuration;
- after interchange of the component;
- after reinstalling the original component.

The fault is established by calculation of the maximum difference between the results of any of the three accuracy tests. The requirements as laid down in 5.13.6 are applicable

#### 12.4.16 Electronics

For gas meters containing electronic components, **additionally** the ~~tests requirements~~ as described in 5.13.7 **are applicable**. **Performance tests** shall be ~~performed~~**executed** using the test methods described in Annex A. An overview of the ~~test program requirements~~ is shown in Table 4, ~~with an indication per test whether it is considered to be an influence test or a disturbance test.~~. After each test it shall be verified that no loss of data has occurred.

If the electronic devices of a gas meter are located in a separate housing, their electronic functions may be tested independently of the measuring transducer of the gas meter by simulated signals representing the rated operating conditions of the meter, ~~in which~~. **In this** case the electronic devices shall be tested in their final housing.

~~(???)~~

In all cases, ancillary equipment may be tested separately.

The tests as indicated in Table 4 are performed under the following conditions:

- The meter under test is powered up, except for the vibration and mechanical shock test;
- The dependency of the gas meter shall be evaluated by one of the flow possibilities stated below, ranked in the following preferred order:
  1. Flow tests; or
  2. Monitoring the unsuppressed flowrate output of the meter at no-flow conditions.

In the case of monitoring the unsuppressed flowrate output of the meter, the requirements indicated in Table 4 are checked while taking into account the influence of the flowrate shift on the meter curve.

Note: ~~Mostly~~**Most** electronic meters have a cut-off for low flowrates. This cut-off must be switched off for this test so that the flowrate output corresponds to the unsuppressed flowrate.

#### ~~1.3.1~~ Software

#### 12.4.17 Influences from accessories

The effect of all functions of ~~the software (like communication possibilities)~~**accessories** is determined by performing an accuracy test at  $Q_{min}$ , with and without applying the specific function. The effect shall be negligible.

### 12.5 Type approval certificate

12.5.1 The following information and data shall appear on the type approval certificate:

- the name and address of the company to whom the type approval certificate is issued;

- the name of the manufacturer;
- the type of the gas meter and/or commercial designation;
- the principal metrological and technical characteristics, such as Accuracy Class, unit(s) of measurement, values of  $Q_{\max}$ ,  $Q_{\min}$  and  $Q_t$ , the rated operating conditions (5.1), the maximum working pressure, nominal internal diameter of the connecting pieces and, in the case of volumetric gas meters, the nominal value of the cyclic volume;
- the type approval sign;
- the period of validity of the type approval (if applicable);
- for meters equipped with drive shafts: the characteristics of the drive shafts;
- the environmental classification;
- information on the location of the marks and inscriptions required in 7.1, initial verification marks and seals (where applicable, in the form of photographs or drawings);
- a list of the documents accompanying the type approval certificate;
- any special comments.

**12.6** **Directions** **Provisions** for performing initial verification

The authority issuing the type approval certificate may give specific instructions for performing the initial verifications, which may be dependent on the technology of the meter and supported by test results of the type evaluation.

*Note:* Examples are the type of gas to be used, zeroing of coriolis meters or the use of specific flowrates.

## 13 Initial verification and subsequent verification

### 13.1 General

Initial verification and subsequent verification shall be carried out either individually or statistically, as described in 13.2. In all cases a meter shall conform to the requirements of this Recommendation. The following minimum program shall be carried out for both the individual and statistical verification.

#### 13.1.1 Conformity with the approved type

A gas meter shall be examined to ascertain whether it conforms to its approved type.

#### 13.1.2 Submission

A gas meter shall be submitted to initial verification in working order and shall be provided with the required space for the application of the verification and protection marks.

#### 13.1.3 Test conditions

The accuracy requirements of chapter 5.3 and 5.4 shall be verified while using the conditions of the gas as close as possible to the operating conditions (pressure, temperature, gas type) under which the meter will be put into use.

The verification may also be performed with a type of gas (e.g. air) other than that the meter is intended to be used with, if the authorities responsible for the verification are convinced **that comparable results will be gained** by either the outcome of the **test evaluation test** with different gases **as described in** (see 12.3.4) or **by** the technical construction of the meter under test, ~~that comparable results will be gained.~~  
**If needed correction factors for the mutual differences between the gases are applied.**

#### 13.1.4 Flowrates

A gas meter ~~is~~ **are to be** tested at the flowrates specified in 12.3.3.

If supported by instructions for performing verifications (see 12.6) ~~authorities may perform~~ the initial verification **may be performed** at a reduced number of flowrates ~~or at flowrates differing from those prescribed in~~.

- Notes:
1. For a diaphragm meter, verification may be performed at  $Q_{max}$ ,  $0.2 \cdot Q_{max}$  and  $Q_{min}$ .
  2. Countries may also decide to use a reduced number of test points for rotary piston gas meters.

#### 13.1.5 Orientation and flow direction

If the gas meter can be used in more than one flow direction and/or meter orientation, the verification shall be performed in both flow directions and/or the meter orientations specified by the manufacturer, unless during the type evaluation it ~~is~~ **was** examined, **proven and reported in the approval certificate** that the meter performance ~~appeared to be~~ **is** independent on the meter orientation (see 12.4.5) and/or the flow direction (see 12.4.6).

#### 13.1.6 Adjustments

If the error curve or the WME is outside the requirements specified in 5.3 and 5.4 respectively, the gas meter shall be adjusted such that the WME is as close to zero as the adjustment and the maximum permissible error allow.

- Notes:
- After changing the adjustment while using single point adjustment it is not necessary to repeat all the tests. It is sufficient to repeat a test at one flowrate and calculate the other error values from the previous ones.*



*For high-pressure applications adjustment is performed while taking into account the operating conditions.*

### 13.1.7 Output shafts

If the gas meter is intended to incorporate ancillary devices operated by the output shafts, these devices shall be attached during the verification, unless attachment after verification is explicitly authorized.

## 13.2 Additional requirements for statistical verifications

This chapter contains the requirements additional to 13.1 for initial verification on a statistical basis.

*Note: National or regional authorities may decide whether the use of statistical methods is allowed or not.*

### 13.2.1 Lot

A lot shall consist of 1000 meters maximum, with homogeneous characteristics. In particular, the type approval identification, meter type, meter range and year of manufacture shall be identical.

### 13.2.2 Samples

Samples shall be randomly taken from a lot.

*Note: The number of samples can be freely chosen, taking into account the requirement in 13.2.3. From the table at the end of 13.2.3 it follows that the minimum number of samples is 40.*

### 13.2.3 Statistical testing

The statistical procedure shall meet the following requirements:

The statistical control will be based on attributes. The sampling system shall ensure:

- an Acceptance Quality Level (AQL) of not more than 1 %; and
- a Limiting Quality (LQ) of not more than 7 %.

The AQL is the maximum percentage of non-conforming items in a lot at which the lot has a probability of 95 % to be accepted.

The LQ is the percentage of non-conforming items in a lot at which the lot has a maximum probability of 5 % to be accepted.

*Note: This requirement gives the testing laboratory substantial freedom in organizing the test. Examples are given in the table below. If 70 meters are tested and 1 meter appears to be non-conforming on one of the attributes, the lot passes.*

Number of instruments to be tested	40	70	100	1000
Maximum number of non-conforming instruments	0	1	2	10

## 13.3 Additional requirements for in-service inspections

Guidance for in-service inspections of utility meters is now being drafted by OIML TC 3/SC 4 [8].

**(To be updated before publication)**

**Annex A: Environmental tests for electronic instruments or devices****(Mandatory)****(To be updated on basis of actual version of D11 just before publication)****A.1 General**

This Annex defines the program of performance tests intended to verify that electronic gas meters and their ancillary devices may perform and function as intended in a specified environment and under specified conditions. Each test indicates, where appropriate, the reference conditions for determining the error.

These tests supplement any other prescribed tests.

When the effect of one influence quantity is being evaluated, all other influence quantities are to be held within the limits of the reference conditions.

**A.2 Severity levels**

For each performance test, typical test conditions are indicated. They correspond to the climatic and mechanical environment conditions to which instruments are usually exposed.

The metrology service carries out performance tests at severity levels corresponding to these environmental conditions. If type approval is granted, the documentation supplied by the manufacturer or its representative to the client or user shall indicate the corresponding limits of use. Manufacturers shall inform potential clients or users of the conditions of use for which the instrument is approved. The metrology service shall verify that the conditions of use are met.

**A.3 Reference conditions**

See 12.3.

**A.4 Performance tests (climatic)****A.4.1 Static temperatures**

<b>A.4.1.1 Dry heat (non condensing): influence test</b>					
Applicable standards	IEC 60068-2-2 [10]				
Test procedure in brief	<p>The test consists of exposure to the specified high temperature under “free air” conditions for the time specified (the time specified is the time after the EUT has reached temperature stability).</p> <p>The change of temperature shall not exceed 1 °C/min during heating up and cooling down.</p> <p>The absolute humidity of the test atmosphere shall not exceed 20 g/m<sup>3</sup>. When testing is performed at temperatures lower than 35 °C, the relative humidity shall not exceed 50 %.</p>				
Severity levels	1	2	3	4	unit
Temperature	30	40	55	70	°C
Duration	2	2	2	2	h

<b>A.4.1.2 Cold: influence test</b>					
Applicable standards	IEC 60068-2-1 [9]				
Test procedure in brief	<p>The test consists of exposure to the specified low temperature under “free air” conditions for the time specified (the time specified is the time after the EUT has reached temperature stability).</p> <p>The change of temperature shall not exceed 1 °C/min during heating up and cooling down.</p> <p>IEC specifies that the power to the EUT shall be switched off before the temperature is raised.</p>				
Severity levels	1	2	3	4	unit
Temperature	5	-10	-25	-40	°C
Duration	2	2	2	2	h

**A.4.2 Damp heat**

<b>A.4.2.1 Damp heat, steady-state (non condensing): influence test</b>		
Applicable standards	IEC 60068-2-78 [15]	
Test procedure in brief	<p>The test consists of exposure to the specified temperature and the specified constant relative humidity for a certain fixed time. The EUT shall be handled such that no condensation of water occurs on it.</p> <p>The gas meter shall be subjected 3 times to an accuracy test:</p> <ul style="list-style-type: none"> <li>- at reference conditions, before the increase of temperature;</li> <li>- at the end of the upper temperature phase;</li> <li>- at reference conditions, 24 h after the decrease of temperature.</li> </ul>	
Temperature	upper temperature	°C
Relative humidity (RH)	93	%
Duration	4	days

<b>A.4.2.2 Damp heat, cyclic (condensing): disturbance test</b>		
Applicable standards	IEC 60068-2-30 [11]	
Test procedure in brief	<p>The test consists of exposure to cyclic temperature variation between 25 °C and the appropriate upper temperature, maintaining the relative humidity above 95 % during the temperature change and low temperature phases, and at 93 % at the upper temperature phases.</p> <p>Condensation should occur on the EUT during the temperature rise.</p> <p>The 24 h cycle consists of:</p> <ol style="list-style-type: none"> <li>1) Temperature rise during 3 h.</li> <li>2) Temperature maintained at upper value until 12 h from the start of the cycle.</li> <li>3) Temperature lowered to lower value within 3 h to 6 h, the rate of fall during the first hour and a half being such that the lower value would be reached in 3 h.</li> <li>4) Temperature maintained at lower value until the 24 h cycle is completed.</li> </ol> <p>The stabilizing period before and recovery after the cyclic exposure shall be such that all parts of the EUT are within 3 °C of their final temperature.</p> <p>During the test the instrument is under power; no gas flow is necessary.</p> <p>The gas meter shall be subjected to an accuracy test both:</p> <ul style="list-style-type: none"> <li>- at reference conditions, before the increase of temperature and</li> <li>- at reference conditions, at least 4 h after the last cycle.</li> </ul>	
Upper temperature	upper temperature	°C
Duration	2	cycles

## A.5 Performance tests (mechanical)

<b>A.5.1 Vibration (random): disturbance test</b>		
Applicable standard	IEC 60068-2-47 [13], IEC 60068-2-64 [14]	
Test procedure in brief	<p>The test consists of exposure to the vibration level for a time sufficient for testing the various functions of the EUT during the exposure. The EUT shall, in turn, be tested in three, mutually perpendicular axes mounted on a rigid fixture by its normal mounting means.</p> <p>The EUT shall normally be mounted so that the gravitational force acts in the same direction as it would in normal use. Where the effect of gravitational force is not important the EUT may be mounted in any position.</p> <p>Example: a diaphragm gas meter always has to be tested in an upright position, for each direction in which the meter has to be tested.</p> <p>During the test the instrument is not powered up.</p>	
Total frequency range	10 - 150 Hz	
Total RMS level	7 m·s <sup>-2</sup>	
ASD level 10-20 Hz	1 m <sup>2</sup> ·s <sup>-3</sup>	
ASD level 20-150 Hz	-3 dB/octave	
Number of axes	3	
Duration per axis	2 minutes	

<b>A.5.2 Mechanical shock: disturbance test</b>	
Applicable standard	IEC 60068-2-31 [12]
Test procedure in brief	The EUT, placed in its normal position of use on a rigid surface, is tilted towards one bottom edge and is then allowed to fall freely onto the test surface. The height of fall is the distance between the opposite edge and the test surface. However, the angle made by the bottom and the test surface shall not exceed 30°.  During the test the instrument is not powered up.
Height of fall	50 mm
Number of falls (on each bottom edge)	1

**A.6 Performance tests (electrical, general)****A.6.1 Radio frequency immunity tests**

<b>A.6.1.1 Radiated, radio frequency, electromagnetic fields: influence test</b>	
Applicable standard	IEC 61000-4-3 [19]
Test procedure in brief	The EUT shall be exposed to electromagnetic field strength as specified by the severity level and a field uniformity as defined by the referred standard.  The frequency ranges to be considered are stepped incrementally with the modulated signal, pausing to adjust the RF signal level or to switch oscillators and antennas as necessary. The step size shall not exceed 1 % of the preceding frequency value.  The dwell time of the amplitude modulated carrier at each frequency shall not be less than the time necessary for the EUT to be exercised and to respond, but shall in no case be less than 0.5 s. The sensitive frequencies (e.g. clock frequencies) shall be analyzed separately. (1)
Frequency range	80 MHz - 2 GHz <sup>(2), (4)</sup> 26 MHz - 2 GHz <sup>(3)</sup>
Field strength	10 V/m
Modulation	80 % AM, 1 kHz, sine wave
Notes	(1) Usually, these sensitive frequencies can be expected to be the frequencies emitted by the EUT. (2) IEC 61000-4-3 (1995-03) [19] only specifies test levels above 80 MHz. For frequencies in the lower range the test methods for conducted radio frequency disturbances are recommended (test A.6.1.2). (3) However, for EUT having no mains or other input port available the lower limit of the radiation test should be 26 MHz taking into account that the test specified in A.6.1.2 cannot be applied (refer to Annex H of IEC 61000-4-3 [19]). In all other cases both A.6.1.1 and A.6.1.2 shall apply. (4) For the frequency range 26 - 80 MHz, the testing laboratory can either carry out the test according to A.6.1.1 or according to A.6.1.2. But in case of a dispute, the results according to A.6.1.2 shall prevail.

<b>A.6.1.2 Conducted radio-frequency fields:</b> influence test	
Applicable standard	IEC 61000-4-6 [22]
Test procedure in brief	Radio frequency EM current, simulating the influence of EM fields shall be coupled or injected into the power ports and I/O ports of the EUT using coupling/decoupling devices as defined in the referred standard. The performance of the test equipment consisting of an RF generator, (de-)coupling devices, attenuators, etc. shall be verified.
RF amplitude (50 $\Omega$ )	10 V (e.m.f.)
Frequency range	0.15 - 80 MHz
Modulation	80 % AM, 1 kHz sine wave
Notes	<p><sup>(1)</sup> This test is not applicable when the EUT has no mains or other input port.</p> <p><sup>(2)</sup> If the EUT is composed of several elements, the tests shall be performed at each extremity of the cable if both of the elements are part of the EUT.</p> <p><sup>(3)</sup> For the frequency range 26 - 80 MHz, the testing laboratory can either carry out the test according to A.6.1.1 or according to A.6.1.2. But in case of a dispute, the results according to A.6.1.2 shall prevail.</p>

<b>A.6.2 Electrostatic discharge:</b> disturbance test		
Applicable standard	IEC 61000-4-2 [18]	
Test procedure in brief	<p>An ESD generator shall be used with a performance as defined in the referred standard. Before starting the tests, the performance of the generator shall be verified. At least 10 discharges shall be applied. The time interval between successive discharges shall be at least 10 seconds. For EUT not equipped with a ground terminal, the EUT shall be fully discharged between discharges.</p> <p>Contact discharge is the preferred test method. Air discharges shall be used where contact discharge cannot be applied.</p> <p>Direct application: In the contact discharge mode to be carried out on conductive surfaces, the electrode shall be in contact with the EUT. In the air discharge mode on insulated surfaces, the electrode is approached to the EUT and the discharge occurs by spark.</p> <p>Indirect application: The discharges are applied in the contact mode to coupling planes mounted in the vicinity of the EUT.</p>	
Test voltage	Contact discharge <sup>(1)</sup>	6 kV
	Air discharge <sup>(1)</sup>	8 kV
Notes	<p><sup>(1)</sup> Contact discharges shall be applied on conductive surfaces. Air discharges shall be applied on non-conductive surfaces.</p>	

<b>A.6.3 Bursts (transients) on signal, data and control lines:</b> disturbance test		
Applicable standards	IEC 61000-4-4 [20]	
Test procedure in brief	<p>A burst generator shall be used with the performance characteristics as specified in the referred standard.</p> <p>The test consist of exposure to bursts of voltage spikes for which the repetition frequency of the impulses and peak values of the output voltage on 50 <math>\Omega</math> and 1000 <math>\Omega</math> load are defined in the referred standard.</p> <p>The characteristics of the generator shall be verified before connecting the EUT. Both positive and negative polarity of the bursts shall be applied.</p> <p>The duration of the test shall not be less than 1 min for each amplitude and polarity. For the coupling of the bursts into the I/O and communication lines, a capacitive coupling clamp as defined in the standard shall be used.</p> <p>The test pulses shall be continuously applied during the measuring time.</p>	
Test voltage	Amplitude (peak value)	1 kV
	Repetition rate	5 kHz

<b>A.6.4 Surges on signal, data and control lines:</b> disturbance test			
Applicable standard:	IEC 61000-4-5 [21]		
Test procedure in brief	<p>A surge generator shall be used with the performance characteristics as specified in the referred standard. The test consists of exposure to surges for which the rise time, pulse width, peak values of the output voltage/current on high/low impedance load and minimum time interval between two successive pulses are defined in the referred standard.</p> <p>The characteristics of the generator shall be verified before connecting the EUT.</p> <p>At least 3 positive and 3 negative surges shall be applied. The injection network depends on the lines the surge is coupled into and is defined in the referred standard.</p> <p>The test pulses shall be continuously applied during the measuring time.</p>		
Test voltage	Unsymmetrical lines	Line to line: 0.5 kV	Line to ground: 1.0 kV
	Symmetrical lines	Line to line: NA	Line to ground: 1.0 kV
	Shielded I/O and communication lines	Line to line: NA	Line to ground: 0.5 kV

## **A.7 Performance tests (electrical, mains power)**

<b>A.7.1 DC mains voltage variation:</b> influence test	
Applicable standard	IEC 60654-2 [16]
Test procedure in brief	The test consists of exposure to the specified power supply condition for a period sufficient for establishing stability.
Test severity	<p>The upper limit, being the DC level, which the electronic instrument has been specified to automatically detect high-level conditions.</p> <p>The lower limit, being the DC level, which the electronic instrument has been specified to automatically detect low-level conditions.</p> <p>The instrument shall comply with the specified maximum permissible error at supply voltage levels between the two levels.</p>

<b>A.7.2 AC mains voltage variation: influence test</b>		
Applicable standards	IEC/TR 61000-2-1 [17]	
Test procedure in brief	The test consists of exposure to the specified power condition for a period sufficient for achieving temperature stability and for performing the required measurements.	
Mains voltage <sup>(1), (2)</sup>	upper limit	$U_{nom} + 10\%$
	lower limit	$U_{nom} - 15\%$
Notes	<p><sup>(1)</sup> In the case of three-phase power supply, the voltage variation shall apply for each phase successively.</p> <p><sup>(2)</sup> The values of <math>U</math> are those marked on the measuring instrument. In case a range is specified, the “-” relates to the lowest value and the “+” to the highest value of the range.</p>	

<b>A.7.3 AC mains voltage dips and short interruptions: disturbance test</b>							
Applicable standards	IEC 61000-4-11 [23], IEC 61000-6-1 [26], IEC 61000-6-2 [27]						
Test procedure in brief	<p>A test generator suitable to reduce the amplitude of the AC mains voltage for a defined period of time is used.</p> <p>The performance of the test generator shall be verified before connecting the EUT.</p> <p>The mains voltage reductions shall be repeated 10 times with an interval of at least 10 seconds.</p> <p>The test pulses shall be continuously applied during the measuring time.</p>						
Test <sup>(1), (2)</sup>		test a	test b	test c	test d	test e	unit
Voltage reduction	Reduction to	0	0	40	70	80	%
	Duration	0.5	1	10 / 12 <sup>(1)</sup>	25 / 30 <sup>(1)</sup>	250 / 300 <sup>(1)</sup>	cycles
Notes	<p><sup>(1)</sup> These values are for 50 Hz / 60 Hz, respectively.</p> <p><sup>(2)</sup> All 5 tests (a, b, c, d and e) are applicable; it is possible that any of the tests fail while the other tests pass.</p>						



<b>A.7.4 Voltage dips, short interruptions and voltage variations on DC mains power</b>			
Applicable standard		IEC 61000-4-29 [25]	
Test procedure in brief		<p>A test generator as defined in the referred standard shall be used. Before starting the tests, the performance of the generator shall be verified.</p> <p>The voltage dips and short interruptions shall be tested on the EUT, for each selected combination of test level and duration, with a sequence of three dips/interruptions with intervals of 10 s minimum between each test event.</p> <p>The EUT shall be tested for each of the specified voltage variations, three times at 10 s intervals in the most representative operating modes.</p> <p>If the EUT is an integrating instrument, the test pulses shall be continuously applied during the measuring time.</p>	
Test severity level		The following levels shall be applied:	Unit
Voltage dips	Test levels	40 and 70	% of the rated voltage
	Duration <sup>(1)</sup>	10; 30; 100	ms
Short interruptions <sup>(4)</sup>	Test condition	High impedance and/or low impedance	
	Test levels	0	% of the rated voltage
	Duration <sup>(1)</sup>	1; 3; 10	ms
Voltage variations	Severity levels	1 <sup>(1)</sup>	
	Test level	85 and 120	% of the rated voltage
	Duration <sup>(1)</sup>	0.1; 0.3; 1; 3; 10	s
Notes		<sup>(1)</sup> All durations are to be tested	

<b>A.7.5 Bursts (transients) on AC and DC mains: disturbance test</b>	
Applicable standards	IEC 61000-4-4 [20]
Test procedure in brief	<p>A burst generator shall be used with the performance characteristics as specified in the referred standard.</p> <p>The test consists of exposure to bursts of voltage spikes for which the repetition frequency of the impulses and peak values of the output voltage on 50 <math>\Omega</math> and 1000 <math>\Omega</math> load are defined in the referred standard.</p> <p>The characteristics of the generator shall be verified before connecting the EUT. Both positive and negative polarity of the bursts shall be applied.</p> <p>The duration of the test shall not be less than 1 min for each amplitude and polarity.</p> <p>The injection network on the mains shall contain blocking filters to prevent the burst energy from being dissipated in the mains.</p> <p>The test pulses shall be continuously applied during the measuring time.</p>
Amplitude	peak value: 2 kV
Repetition rate	5 kHz

<b>A.7.6 Surges on AC and DC mains: disturbance test</b>	
Applicable standard:	IEC 61000-4-5 [21]
Test procedure in brief	<p>A surge generator shall be used with the performance characteristics as specified in the referred standard. The test consists of exposure to surges for which the rise time, pulse width, peak values of the output voltage/current on high/low impedance load and minimum time interval between two successive pulses are defined in the referred standard.</p> <p>The characteristics of the generator shall be verified before connecting the EUT.</p> <p>On AC mains supply lines at least 3 positive and 3 negative surges shall be applied synchronously with AC supply voltage in angles 0°, 90°, 180° and 270°.</p> <p>On DC power lines, at least 3 positive and 3 negative surges shall be applied.</p> <p>The injection network depends on the lines the surge is coupled into and is defined in the referred standard.</p> <p>The test pulses shall be continuously applied during the measuring time.</p>
Test voltage	Line to line: 1.0 kV Line to ground: 2.0 kV

<b>A.7.7 Ripple on DC mains power</b>	
Applicable standard	IEC 61000-4-17 [24]
Test procedure in brief	<p>A test generator as defined in the referred standard shall be used. Before starting the tests, the performance of the generator shall be verified.</p> <p>The test consist subjecting the EUT to ripple voltages such as those generated by rectifier systems and/or auxiliary service battery chargers overlaying on DC power supply sources. The frequency of the ripple is the power frequency or its multiple 2, 3 or 6, as specified in the product specification. The waveform of the ripple, at the output of the test generator, has a sinusoid-linear character.</p> <p>The test shall be applied for at least 10 min or for the time period necessary to allow a complete verification of the EUT's operating performance.</p>
Percentage of the nominal DC voltage <sup>(1)</sup>	2
Notes	<p><sup>(1)</sup> The test levels are a peak-to-peak voltage expressed as a percentage of the nominal DC voltage.</p> <p><sup>(2)</sup> This test does not apply to instruments connected to battery charger systems incorporating switch mode converters.</p>

## **A.8 Performance test (battery powered instrument)**

<b>A.8 Low voltage of internal battery (not connected to the mains power): influence test</b>	
Applicable standards	There is no reference to standards for this test.
Test procedure in brief	<p>The test consists of exposure to the specified condition of the battery(s) for a period sufficient for achieving temperature stability and for performing the required measurements.</p> <p>If an alternative power source (standard power supply with sufficient current capacity) is used in bench testing to simulate the battery, it is important that the internal impedance of the specified type of battery also be simulated.</p> <p>The maximum internal impedance of the battery is to be specified by the manufacturer of the instrument.</p>
Lower limit of the voltage	The lowest voltage at which the instrument functions properly according to the specifications.
Number of cycles	At least one test cycle for each functional mode.

## Annex B: Flow disturbance tests (Mandatory)

### B.1 General

B.1.1 The test specified in this Annex shall be carried out with air at atmospheric pressure, at flowrates of  $0.25 Q_{\max}$ ,  $0.4 Q_{\max}$  and  $Q_{\max}$ . Alternatively, the test may be performed with a suitable gas at a pressure within the pressure range of the gas meter.







B.1.2 If the design of the type of the gas meter is similar for all pipe sizes, it is sufficient to perform the full set of tests on one size. If necessary tests are also performed with other sizes.

### B.2 Flow disturbances

B.2.1 The piping configurations are presented in the following table B.1, whereby for each of the meters those configurations are chosen for which the meters are the most sensitive.

B.2.2 All tests stated in table B.1 apply to gas meters meant to be used in non-residential environment. The tests with expander, reducer and diameter step do not apply to gas meters meant to be used in residential areas.

Table B.1 - Piping configurations for flow disturbances

	Test conditions	Remarks	Turbine	Ultrasonic	Thermal mass	Vortex
	Reference conditions	Approx. 80 D straight line	X	X	X	X
	A single 90°-bend		X	X	X	X
	Double out-of-plane bend	rotating right	X	X	X	X
	Double out-of-plane bend	rotating left	X	X	X	X
	Expander	one step difference of the pipe diameter is applied		X	X	X
	Reducer			X	X	X
	Diameter step on the upstream flange	approx. +3% and -3%	X	X		X

B.2.2 For each of the perturbations the minimum length whereby the additional error – above  $Q_t$  – in respect to the reference conditions is less than or equal to one third of the maximum permissible error.

~~must be determined.~~

~~To meet the requirements a flow conditioner specified by the manufacturer may be used.~~

- B.2.3 During each test mentioned in table B.1 the shift of the error curve of the gas meter shall **meet the requirement as stated in 5.13.3** ~~not exceed one third of~~.  
A flow conditioner specified by the manufacturer may be used to meet the requirements. In this case the flow conditioner shall be specified in the type approval certificate.
- B.2.4 If a specific minimum length of straight upstream piping  $L_{min}$  is necessary to meet the requirement as indicated in B.2.3 this  $L_{min}$  shall be applied during the ~~maximum permissible error~~ tests and its value shall be stated in the type approval certificate.
- B.2.5 Additional for ultrasonic gas meters the minimum length of straight upstream piping  $L_{min}$  shall be such that with the addition of an extra 10 D straight pipe length, the requirements as stated in 5.13.3 also are met for each test mentioned in table B.1.

## Annex C: Overview of **tests** requirements and applicable tests for different metering principles (Mandatory)

### C.1 General

This Annex shows the requirements and applicable tests required for ~~the~~ a number of different metering principles. For those metering principles not listed in the table the applicability of each test shall be determined.

In Table C.1 the diaphragm gas meter, the Temperature Compensated (TC) diaphragm gas meter, the rotary piston gas meter and the turbine gas meter are considered as purely mechanical meters.

If electronics and/or software are added to these mechanical operating principles, the electronic and software tests will apply as well.

Table C.1 Overview of requirements and applicable tests for different metering principles

Test	Clause	Clause	Diaphragm	Rotary piston	Turbine	Ultrasonic	Coriolis	Thermal mass	Vortex
Design inspection	6		X	X	X	X	X	X	X
Error	5.35.4	12.4.2	X	X	X	X	X	X	X
Reproducibility	5.6	12.4.3	X	X	X	X	X	X	X
Repeatability	5.7	12.4.4	X	X	X	X	X	X	X
Orientation	5.13.1	12.4.5	-	X	X	-	X	-	-
Flow direction	5.13.2	12.4.6	-	X	X	X	X	-	-
Working pressure	5.8	12.4.7	-	X	X	X	X	X	X
Temperature	5.9	12.4.8	X	X	X	X	X	X	X
Flow disturbance	5.13.3	12.4.9	-	-	X	X	-	X	X
Durability	5.10	12.4.10	X	X	X	if applicable	-	if applicable	-
Drive shaft test (torque)	5.13.4	12.4.11	-	if applicable	if applicable	-	-	-	-
Overload flow test	5.11	12.4.12	X	X	X	-	-	-	-
Different gases	5.13.5	12.4.13	X	X	X	X	X	X	X
Vibrations and shocks	5.12	12.4.14	X	X	X	X	X	X	X
Interchangeable components	5.13.6	12.4.15	-	if applicable	if applicable	if applicable	-	-	-
Electronics	5.13.7	12.4.16 + Annex A	-	-	-	X	X	X	X
Influences from accessories	1.1.1	1.1.1	-	-	-	X	X	X	X

## **Annex D: Type evaluation of a family of gasmeters (Mandatory)**

### **D.1 Families of gas meters**

This Annex describes the criteria to be applied by the evaluating authority in deciding whether a group of gas meters can be considered to be from the same family for type evaluation purposes, for which only selected samples of meters sizes are to be tested.

### **D.2 Definition**

A family of meters is a group of gas meters of different sizes and/or different flowrates, in which all the meters shall have the following characteristics:

- the same manufacturer;
- geometric similarity of the parts in contact with the gas;
- the same metering principle;
- the same flow rates;
- the same accuracy class;
- the same temperature range;
- the same electronic device for each meter size;
- a similar standard of design and component assembly;
- the same materials for those components that are critical to the performance of the meter;
- the same installation requirements relative to the meter size, e.g. 10 D (pipe diameter) of straight pipe upstream of the meter and 5 D of straight pipe downstream of the meter.

### **D.3 Meter selection**

When considering which sizes of a family of gas meters should be tested, the following rules shall be followed:


- The evaluating authority shall declare the reasons for including and omitting particular meter sizes from testing;
- The smallest meter in any family of meters shall always be tested;
- Meters which have the most extreme operating parameters within a family, shall be considered for testing, e.g. the largest flowrate range, the highest peripheral speed of moving parts, etc;
- If practical, the largest meter in any family of meters should always be tested. However, if the largest meter is not tested, then any meter having a  $Q_{\max} > 2 \times Q_{\max}$  of the largest meter tested, shall not be considered part of the family concerned;
- Durability tests shall be applied to meters where the highest wear is expected;

For meters with no moving parts in the measurement transducer, the smallest size shall be selected for durability tests;

All performance tests relating to influence quantities shall be carried out on one size from a family of meters;

The family members underlined in Figure D.1 may be considered as an example for testing

(*Note:* Each row represents one family, meter 1 being the smallest).

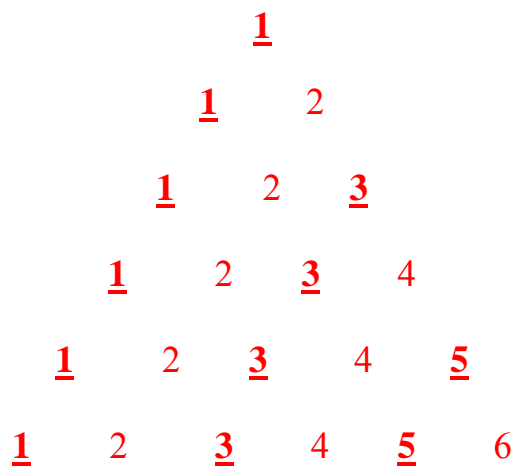

**Figure D.1: Family of meters pyramid**

## **Annex E: Bibliography**

**(To be updated before publication)**

- [1] OIML V 2-200: 2007 (is identical with ISO/IEC Guide 99: 2007) International Vocabulary of Metrology - Basic and general concepts and associated terms (VIM).
- [2] OIML V 1 (2000) International vocabulary of terms in legal metrology (VIML).
- [3] The International System of Units (SI), 8th edition, BIPM, Paris, 2006
- [4] OIML D 2 (1999): Legal units of measurement, OIML, Paris + Amendment 2004
- [5] OIML D 11 (2004): General requirements for electronic measuring instruments. OIML
- [6] OIML G 1: 100 ( 2008) Guide to the expression of uncertainty in measurement (GUM); which is the first edition published under the Charter of the Joint Committee on Guides in Metrology (JCGM)and is the 1995 version of the GUM with minor corrections.
- [7] OIML R 140 (2007) Measuring systems for gaseous fuel.
- [8] Surveillance of utility meters in service on the basis of sampling inspections, OIML TC 3/SC 4, 2<sup>nd</sup> Committee Draft, *February* 2006.
- [9] IEC 60068-2-1 Ed. 6.0 (2007-03) Environmental testing, Part 2: Tests, Section 1 Test A: Cold.
- [10] IEC 60068-2-2 Ed. 5.0 (2007-07) Environmental testing, Part 2: Tests, Section 2 Test B: Dry heat.
- [11] IEC 60068-2-30 Ed. 3.0 (2005-08) Environmental testing, Part 2: Tests, Section 30 Test Db: Damp heat, cyclic (12 h+ 12 h cycle).
- [12] IEC 60068-2-31 Ed. 2.0 (2008-05) Environmental testing, Part 2: Tests, Section 31 Test Ec: Rough handling shocks, primarily for equipment-type specimens.
- [13] IEC 60068-2-47 Ed. 3.0 (2005-04) Environmental testing, Part 2:Tests, Section 47: Mounting of specimens for vibration, impact and similar dynamic tests.
- [14] IEC 60068-2-64 Ed. 2.0 (2008-04) Environmental testing, Part 2: Tests Section 64, Test Fh: Vibration, broad-band random and guidance.
- [15] IEC 60068-2-78 Ed. 1.0 (2001-08) Environmental testing, Part 2: Tests Section 78: - Test Cab: Damp heat, steady state
- [16] IEC 60654-2 Ed. 1.0 (1979-01), with amendment 1 (1992-09) Operating conditions for industrial-process measurement and control equipment Part 2: Power. ~~Consolidated edition~~
- [17] IEC/TR 61000-2-1 Ed. 1.0 (1990-05) Electromagnetic compatibility (EMC), Part 2: Environment - Section 1: Description of the environment - Electromagnetic environment for low-frequency conducted disturbances and signalling in public power supply systems. (Technical Report)
- [18] IEC 61000-4-2 Ed. 2.0 (2008-12) Electromagnetic compatibility (EMC), Part 4: Testing and measurement techniques, Section 2: Electrostatic discharge immunity test. (Basic EMC Publication)
- [19] IEC 61000-4-3 Ed. 3.1 (2008-04) Electromagnetic compatibility (EMC), Part 4: Testing and measurement techniques, Section 3: Radiated, radio-frequency, electromagnetic field immunity test. (Basic EMC Publication)
- [20] IEC 61000-4-4 Ed. 2.0 (2004-07) with corrigendum 1 (2006-08) Electromagnetic compatibility (EMC), Part 4: Testing and measurement techniques - Section 4: Electrical fast transient/burst immunity test. Basic EMC Publication.
- [21] IEC 61000-4-5 Ed. 2.0 (2005-11) Electromagnetic compatibility (EMC), Part 4 Testing and measurement techniques , Section 3: Surge immunity test. (Basic EMC Publication)
- [22] IEC 61000-4-6 Ed. 3.0 (2008-10) Electromagnetic compatibility (EMC), Part 4: Testing and measurement techniques, Section 6: Immunity to conducted disturbances, induced by radio-frequency fields. (Basic EMC Publication)
- [23] IEC 61000-4-11 Ed.2.0 (2004-03) Electromagnetic compatibility (EMC), Part 4: Testing and measuring techniques, Section 11: Voltage dips, short interruptions and voltage variations immunity tests. (Basic EMC Publication)
- [24] IEC 61000-4-17 Ed.1.2 (2009-01) Electromagnetic compatibility (EMC), Part 4: Testing and measuring techniques, Section 17: Ripple on d.c. input power port immunity test. (Basic EMC Publication)
- [25] IEC 61000-4-29 Ed.1.o (2000-08) Electromagnetic compatibility (EMC), Part 4: Testing and measuring techniques, Section 29: Voltage dips, short interruptions and voltage variations on d.c. input. (Basic EMC Publication)



- [26] IEC 61000-6-1 Ed.2.0 (2005-03) Electromagnetic compatibility (EMC), Part 6: Generic standards, Section 1: Immunity for residential, commercial and light-industrial environments.
- [27] IEC 61000-6-2 Ed.2.0 (2005-01) Electromagnetic compatibility (EMC), Part 6: Generic standards, Section 2: Immunity for industrial environments.